asber

TAKING YOUR BUSINESS FORWARD



REFRIGERATION

COOKING

CATALOG 2018/2019

TABLE OF CONTENTS

About Asber

Onnera Group

How we work

Asber in North America

Refrigeration

Cooking

Warranty, Terms & Conditions








THE MULTISOLUTION SPECIALIST

We are a global multi-solution manufacturer of foodservice equipment with a complete range of market-leading products including Refrigeration and Cooking. Our designs are made to enhance user convenience by providing always the best solution at a competitive price.

Vision

Asber brings the innovative approach of a dynamic and flexible brand that constantly evolves with the latest trends of the market, offering-locally adapted products across the globe.

The focus on efficency in our internal processes has allowed us to deliver what really matters: products and service that stand behind professional´s performance. Your success is both our goal and inspiration.

We are what we do

Reliability and fuctionality conform the core of our product offering, Asber defines itself with a unique price-performance relationship setting a new standard for professional equipment within the hospitality industry. Emphasis is on a simple, real and honest proposal :

The most cost-effective investment in quality

We know that the only way to build customers confidence is providing them with equipment they can rely on. And that is simply what we do.



ONNERA GROUP

Asber is the youngest brand of the seven companies integrating the ONNERA GROUP.

ONNERA GROUP is a large international business group that has been providing worldwide equipment solutions for the last 40 years. This huge experience englobes the Restaurant & Catering, Laundry and Refrigeration industries



A global group that markets its products over five continents. It has 10 manufacturing plants that are strategically distributed around the world and over 1700 professionals able to offer a wide variety of solutions adapted to meet the needs of each individual market.

MONDRAGON
HUMANITY AT WORK
Finance
Industry
Retail
Knowledge

ONNERA Group is embeded in the cooperative experience of Mondragon (MCC), one of the largest cooperatves and industrial groups in the EU This represents a committement to work for a better future.

A future where the brands that make up the group are synonymous with integrity, commitment, initiative and teamwork, all walking together towards a new era.

A proactive attitude that constantly strives to find better, more efficient and sustainable ways and methods, making ONNERA Group a leading international group. A world reference.

ONNERA Group's turnover in 2012 was 174 million euros.



TAKING YOUR BUSINESS FORWARD


Join forces with us to take your business to the next level

1. MULTI-SOLUTION SPECIALIST in Foodservice Equipment
2. OEM PARTNERSHIP Design & Manufacturing Services
3. GLOBAL MANUFACTURING Locally everywhere
4. QUALITY & ENVIRONMENTAL SUSTAINABILITY

1 MULTI-SOLUTION SPECIALIST in Foodservice Equipment

We offer the best specialist model combined with a complete product range.

REFRIGERATION




















COOKING RANGES



















Every product category has a dedicated R&D team and a specific production platform that enable us to deliver very specialized products.

2 OEM PARTNERSHIP. Design and Manufacturing Services

To maximize your business potential we offer OEM design and production resources


- Dedicated R&D teams
- Expert production capabilities
- Product strategic guidance
- Innovative partnership solutions

You are invited to become one of our OEM partners in order to gain access to benefits such us:

Cost manufacturing savings

Improved time to market

Higher brand visibility

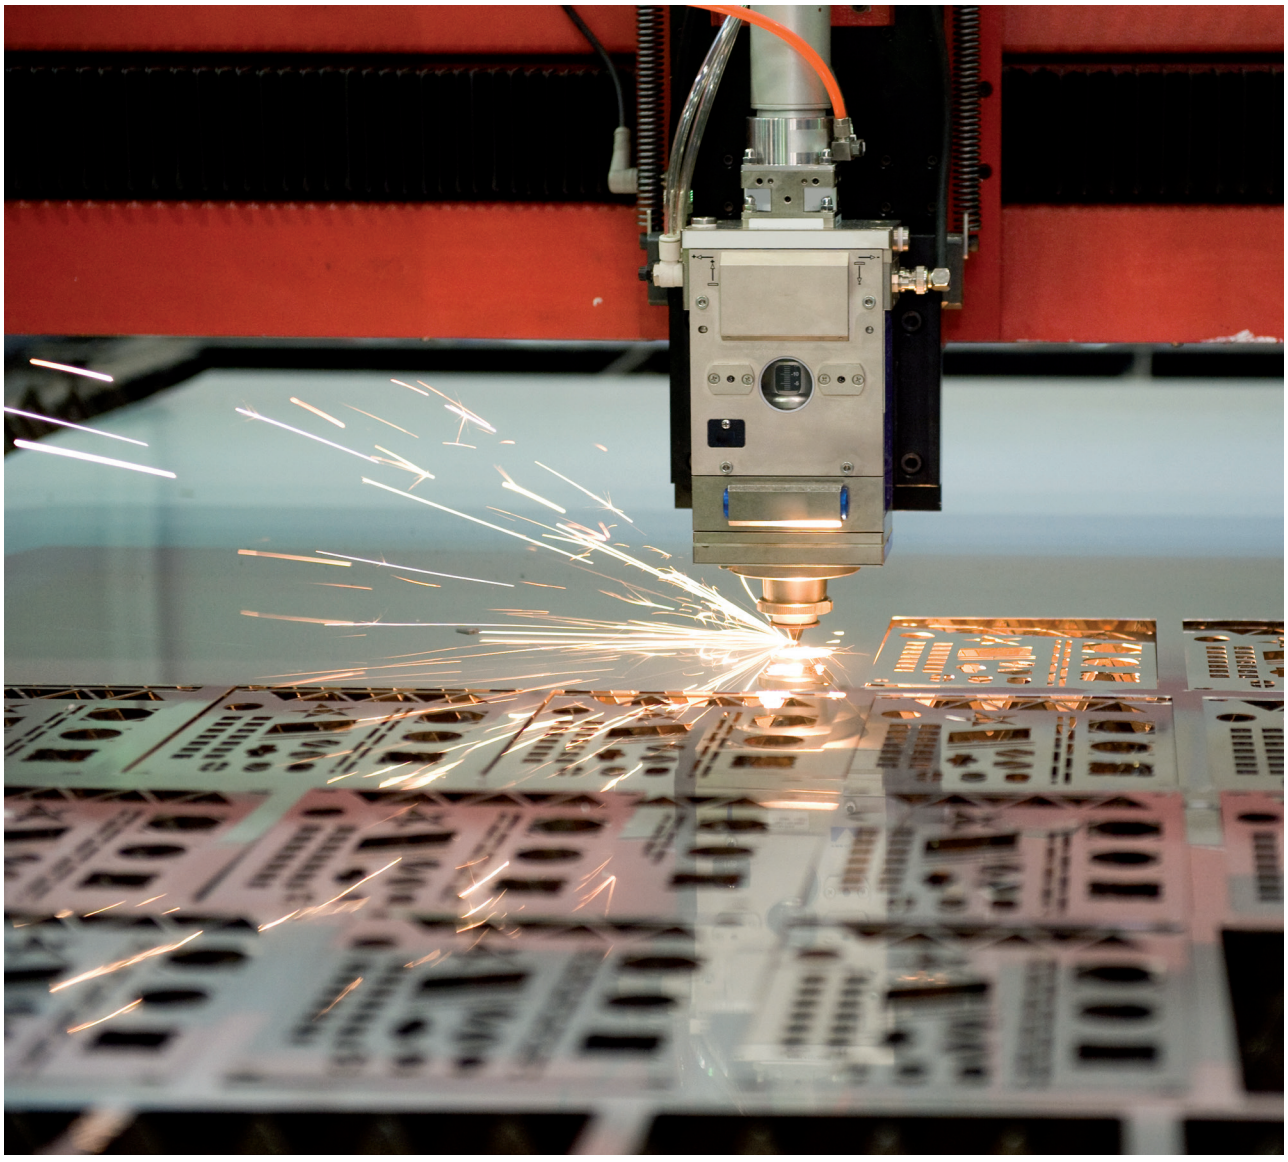

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 1-786-594-3780

3 GLOBAL MANUFACTURING. Locally everywhere.

Our products come from six manufacturing plants, in five different countries from three continents. This global manufacturing footprint enables us to provide a locally-adapted product offering that meets customer demands across every geographic destination.

6 MANUFACTURING PLANTS • 5 COUNTRIES • 3 CONTINENTS



Locally Everywhere

Our market approach is also locally everywhere, with proactive, hands-on local sales teams in all global markets; Europe, Asia-Pacific, Middle East and the Americas








13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 1-786-594-3780

4 QUALITY & ENVIRONMENTAL SUSTAINABILITY

Asber has established an integrated Quality and Evironmental Management System, certified as per UNE-E-ISO 9001:2008 and UNE-EN-14001:2004 international standards.

Quality is never an accident, is the result of intelligent effort. Our quality systems track the performance of key customer touch points and develope international actions to correct any deviation from the targets. This improvement process ensures that our products and services meet or exceed customer expectations



OUR LOCAL PROPOSAL

Asber's honest value proposal has gained a consolidated position in Europe, Asia and South America. After this success, Asber arrives to the North American market with a selection of market-leading products including Refrigeration and Cooking.

LOCAL HEADQUARTERS AND MANUFACTURING PLANT

Our Miami Headquarters provide quality pre and post-sales services and are equipped with a **showroom** and a **demo-kitchen area**.

Our Mexico Factory is closely located to the border, enabling us to better serve the US market. In order to guarantee **high production standards,** we have developed a thorough system of **quality inspectios**. Each unit is tested prior to shipping to ensure customer satisfaction.

PARTS & STOCK AVAILABILITY

We know that availability is a must for an industry that holds so much responsability in keeping and delivering food quality.

We hold equipment and parts stock at our **Mexico factory,** our **Miami headquarters** and **many distribution points across the country,** Therefore we can respond with agility and make the difference for our clients.

WARRANTY AND SERVICE NETWORK

Headquartered in Florida, we have a vast service network operating within the US territory to bring you fast and effective technical assistance wherever you are located. This network includes **more than 400 service agents nationwide.**

Being close to you is the best place to tend to your needs.

SPECIALIZED CUSTOMER SERVICE

Our team of experienced professionals has a deep and **extensive knowledge of our products.**

They are specifically trained to support you, being able to give you **real time answers** and valuable advice anytime you need them







REFRIGERATION

Asber refrigeration offers a complete range of equipment where construction, design and performance work together in a perfect gear.

CONSTRUCTION

We only use high quality materials, principally stainless steel for strength and durability. All our units feature a high-density polyurethane insulation resulting in less energy consumption, and better temperature control.

DESIGN

Our product design seeks functionality and cares for details. Features like full length embedded door handles, LED lights, stay open doors, coved corners or standard locks work together for customer convenience.

PERFORMANCE

Factory engineered oversized and balanced refrigeration system with easy temperature control ensures performance and efficiency.



- Merchandisers
- Reach-Ins
- Undercounters
- Prep & Salad Tables
- Mega-top Tables
- Pizza Tables
- Bottle Coolers
- Glass Froster
- Back Bars
- Direct Draws
- Display Cases

REFRIGERATION WARRANTY

Warranty: Asber usa Inc. ("Asber") warrants to the first-end-user purchaser (the "User") that the Asber brand equipment sold hereunder, except for parts and accessories which carry the warranty of a supplier (the "Equipment") will be free from defects in material and factory workmanship under normal conditions of use and maintenance for a period of (1) one year from the date of Installation (Warranty Commencement date), but in no event to exceed (15) fifteen months from the date of shipment.

Warranty Coverage: If there is a defect in material or factory workmanship covered by this Warranty reported to Asber during the period the applicable Warranty is in force and effect, Asber will repair or replace, at Asber's option, that part of the Equipment that has become defective. Asber will cover labor cost within one year from the warranty commencement date or 15 months from shipment date, whichever occurs first. Asber shall bear all labor costs in connection with the installation of these replacement parts, provided that, the installation is conducted by Asber or its authorized representative. Charges for warranty travel time to round trip total of (2) two hours or up to 100 miles total. Any charges exceeding those stated herein must have prior authorization by Asber.

Additional Four (4) Year Compressor Part Warranty: In addition to the warranty set above, Fagor warrants the sealed compressor (part only) for an additional four (4) year based on the original installation date, but not to exceed fifteen (15) months after shipment from the manufacturer. This warranty is for defects, both in workmanship and material, under the normal and proper use and maintenance service. The four (4) year extended warranty only applies to sealed parts of the compressor and does not apply to any other part or component, including, but not limited to cabinet, temperature control, refrigerant, motor starting equipment, fan assembly, or any other electrical or mechanical component.

Parts Warranty Coverage: Asber warrants all new machine parts produced or authorized by Asber to be free from defects in material and workmanship for a period of 90 days from the Warranty Commencement Date. If any defect in material and workmanship is found to exist within the warranty period, Asber will replace the defective part without charge. Defective parts become the property of Asber.

Asber will have no responsibility to honor claims received after the date the applicable Warranty expires. Notwithstanding the foregoing, any claim with reference to the equipment or any parts therefore for any cause shall be deemed waived unless submitted by the user to Asber within thirty (30) days after the date the user discovered, or should have discovered, the claim. In connection with all claims under this Warranty, Asber will have the right, at its own expense, to have its representatives inspect the equipment at the user's premises and to request all of user's records pertaining to the equipment to determine whether a defect exists, whether the conditions set forth in this Warranty have been satisfied, and whether or not the applicable Warranty is in effect.

Exclusions from and Conditions to Warranty Coverage: This Warranty does not cover parts or accessories, which carry the warranty of a supplier. Application of this Warranty is further conditioned upon the following:

- Installation: The Equipment must be properly installed in accordance with Asber's installation procedures and instructions and reviewed and tested by Asber's authorized representative.

- No Alteration: The Equipment must not have been modified or altered from its condition at the date of original installation.

- Use: ASBER EQUIPMENT IS NOT DESIGNED FOR PERSONAL, FAMILY OR HOUSEHOLD PURPOSES, AND ITS SALE FOR SUCH PURPOSES IS NOT INTENDED. IN THE EVENT THE EQUIPMENT IS SO USED, THIS WARRANTY SHALL BE NULL AND VOID, AND THE EQUIPMENT SHALL BE DEEMED TO HAVE BEEN SOLD "AS IS-WHERE IS" WITHOUT ANY WARRANTY OF ANY KIND, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF TITLE, NONINFRINGEMENT, MERCHANT-ABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

- Proper Maintenance and Operation: The Equipment must be properly maintained and operated in accordance with Asber's maintenance and operating procedures. All service, labor and parts must be acquired from Asber or its authorized service representative for the User's area.

- Minor Parts. No labor will be associated with the replacement of minor items such as, and not limited to, switches, pilot lights, gauges, fuses, etc. or replacement of wear items such as curtains, squeeze tubes, etc.

- This warranty is void if failure is a direct result of handling &/or transportation, fire, water, accident, misuse, "acts of God," attempted repair by unauthorized persons, improper installation, if serial number has been removed or altered, or if unit is used for purpose other than it was originally intended.

Failure to comply with any of these conditions will void this Warranty. In addition, this Warranty does not cover defects due to apparent abuse, misuse or accident.

THE FOREGOING WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES NOT EXPRESSLY SET FORTH HEREIN, WHETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING BUT NOT LIMITED TO ANY REPRESENTATION OF PERFORMANCE AND ANY IMPLIED WARRANTIES OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. NO OTHER WARRANTIES ARE AUTHORIZED ON BEHALF OF ASBER UNLESS SPECIFICALLY ISSUED BY ASBER

Asber shall have no liability for incidental or consequential losses, damages or expenses, loss of sales, profits or goodwill, or punitive or exemplary damages directly or indirectly arising from the sale, handling or use of the Equipment or from any other cause relating thereto, whether arising in contract, tort, warranty, strict liability or otherwise. Asber's liability hereunder in any case is expressly limited, at Asber's election, to repair or replacement of Equipment or parts therefore or to the repayment of, or crediting the user with, an amount equal to the purchase price of such goods.

Prices & Specifications: Asber reserves the right to change the prices and specifications of the equipment and/or material without notice. Prices are FOB Asber warehouses. All orders are subject to acceptance by Asber USA, Inc.

Merchandisers

SWING DOOR

- ☐ ARM-10A
- ☐ ARM-17A
- ☐ AFM - 17

STANDARD FEATURES

- **DURABLE CONSTRUCTION**
  Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white paint. Also available in black as special order from factory.
- **ERGONOMICALLY DESIGNED DOORS**
  "Low E" double pane thermal insulated glass doors on refrigerators and triple pane on freezers. All come with easy grip handles on the aluminium frame and self closing/90 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the magnetic gasket is removable without tools with positive seal closure assuring ease of cleaning and replacement.
- **ANALOG CONTROLLER**
  This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.
- **HIGH DENSITY POLYURETHANE INSULATION**
  Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -10°F.
- **BOTTOM MOUNT COMPRESSOR**
  Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- **SHELVES**
  Adjustable epoxy coated wire shelves.
- **LED LIGHT**
  "Low-E" consumption LED interior lights lasts up to 10 times longer compared to fluorescent light, providing greater visibility, shadow-free illumination and enhanced product display.



ARM(F)-17A



ARM-10A

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters / 4" Casters / 6" Adjustable stainless steel legs / Factory reverse door hinging / 220V-50 cycles- 1 phase

ISO 9001

MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Lenght	Cabinet Dimensions L"	D" *	H"	Shipping Wt. lbs.	Cubes
REFRIGERATORS													
ARM-10A	2	9.8	8	5.1	1/4	115/60/1	5-15P	8'	36	21 3/4	54	203	30
ARM-17A	1	16	4	5.8	3/4	115/60/1	5-15P	8'	27	26 1/4	72 5/8	268	37
FREEZERS													
AFM-17	1	16	4	7.9	1	115/60/1	5-15P	8'	27	26 3/8	72 5/8	283	37

*Depth does not include 1 per door handle .


13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


PLAN VIEW

Merchandisers
SWING DOOR


ARM-10A FRONT

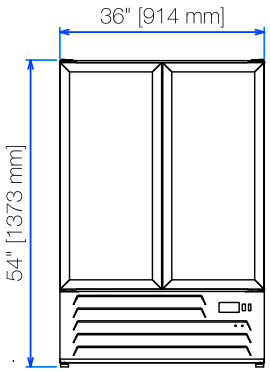


ARM-10A SIDE

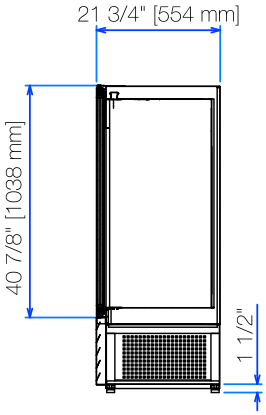


ARM-10A TOP




ARM-17(A) FRONT

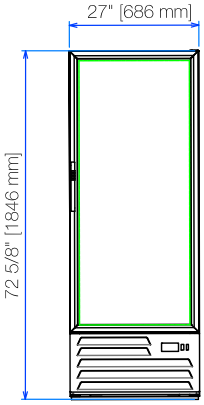

ARM-17(A) SIDE

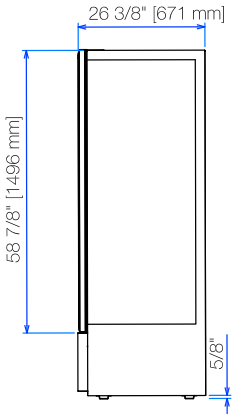

ARM-17(A) TOP



Specifications

ISO 9001

CONSTRUCTION

- Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white vinyl. Also available in black as special order from factory.
- "Low-E" consumption LED interior lights lasts up to 10 times longer compared to flourescent light, providing greater visibility, shadow-free illumination and enhanced product display.

DOORS & SHELVES

- "Low E" double pane thermal insulate glass doors on refrigerators and triple pane on freezers. All come with easy grip handles and self closing-90 ° stay open door feature, working together for customer convenience.
- Adjustable epoxy coated wire shelves.

REFRIGERATION SYSTEM

- Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -10°F.
- Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- Large fan motor and fan blades for better air circulation.
- Analog temperature control system on refrigerators and digital on freezers allows customers to keep the utmost food quality for a longer period of time.
- Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year:** Labor and parts warranty.
- **Five year:** Compressor warranty.
- **International:** One year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

Merchandisers
SWING DOOR

DISPLAY

- ☐ ARMD - 23A
- ☐ ARMD - 37A
- ☐ ARMD - 49A
- ☐ AFMD - 23
- ☐ AFMD - 37
- ☐ ARMD - 72A

STANDARD FEATURES

- **DURABLE CONSTRUCTION**
  Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white paint. Also available in black as special order from factory.
- **ERGONOMICALLY DESIGNED DOORS**
  "Low E" double pane thermal insulated glass doors on refrigerators and triple pane on freezers. All come with easy grip handles on the aluminium frame and self closing/90 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the magnetic gasket is removable without tools with positive seal closure assuring ease of cleaning and replacement.
- **TEMPERATURE CONTROLLER**
  Asber's temperature control system allows customers to keep the utmost food quality for a longer period of time. Freezers come standard with digital controller for extra precision.
- **HIGH DENSITY POLYURETHANE INSULATION**
  Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F and ARMD-72 is R-404A Freezers maintain temperature at -10°F.
- **BOTTOM MOUNT COMPRESSOR**
  Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- **SHELVES**
  Adjustable epoxy coated wire shelves.
- **LED LIGHT**
  "Low-E" consumption LED interior lights lasts up to 10 times longer compared to fluorescent light, providing greater visibility, shadow-free illumination and enhanced product display.
- **ILLUMINATED SIGN PANEL**
  This LED back-lit panel adds a pleasant atmosphere to your store or restaurant while helping your product stand out. Allows for easy customization .



AFMD-23



ARMD-49A



ARMD-72A

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters / 4" Casters / 6" Adjustable stainless steel legs / Factory reverse door hinging / 220V-50 cycles- 1 phase

ISO 9001













MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Lenght	Cabinet Dimensions L"	D"	H"	Shipping Wt. lbs.	Cubes
REFRIGERATORS													
ARMD-23A	1	23	4	6.1	1/4	115/60/1	5-15P	8'	27	32	78 5/8	299	47
ARMD-37A	2	37	8	10.2	1/3	115/60/1	5-15P	8'	43 3/8	32	78 5/8	423	71
ARMD-49A	2	49	8	6.9	1/3	115/60/1	5-15P	8'	54	32	78 5/8	483	93
ARMD-72A	3	72	12	10.2	1/2	115/60/1	5-15P	8'	83 1/8	32	78 5/8	690	140
FREEZERS													
AFMD-23	1	23	4	7.9	1	115/60/1	5-15P	8'	27	32	78 5/8	317	47
AFMD-37	2	37	8	12	1/3	115/60/1	5-15P	8'	43 3/8	32	78 5/8	420	71

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

PLAN VIEW

Merchandisers
SWING DOOR

	ARMD-23(A)	ARMD-37(A)	ARMD-49A	ARMD-72A
FRONT				
SIDE				
TOP				

Specifications

ISO 9001

CONSTRUCTION

- Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white vinyl. Also available in black as special order from factory.
- "Low-E" consumption LED interior lights lasts up to 10 times longer compared to flourescent light, providing greater visibility, shadow-free illumination and enhanced product display.

DOORS & SHELVES

- "Low E" double pane thermal insulate glass doors on refrigerators and triple pane on freezers. All come with easy grip handles and self closing-90 ° stay open door feature, working together for customer convenience.
- Adjustable epoxy coated wire shelves.

REFRIGERATION SYSTEM

- Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -10°F, ARMD-72 use R-404A.
- Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- Large fan motor and fan blades for better air circulation.
- Analog temperature control system on refrigerators and digital on freezers allows customers to keep the utmost food quality for a longer period of time.
- Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year:** Labor and parts warranty.
- **Five year:** Compressor warranty.
- **International:** One year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

Merchandisers

SLIDING DOOR

- ☐ ARMD-35A-SD
- ☐ ARMD-47A-SD
- ☐ ARMD-69A-SD

STANDARD FEATURES

- **DURABLE CONSTRUCTION**
  Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white paint. Also available in black as special order from factory.
- **ERGONOMICALLY DESIGNED SLIDING DOORS**
  "Low E" double pane thermal insulated glass doors with a self-closing and counter balanced system for convenience and efficiency.
- **ANALOG CONTROLLER**
  This temperature control system allows customers to keep the utmost food quality for a longer period of time.
- **HIGH DENSITY POLYURETHANE INSULATION**
  Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators maintain temperature from 33° to 38°F. ARMD-69-SD use R-404A.
- **BOTTOM MOUNT COMPRESSOR**
  Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- **SHELVES**
  Adjustable epoxy coated wire shelves.
- **LED LIGHT**
  "Low-E" consumption LED interior lights lasts up to 10 times longer compared to fluorescent light, providing greater visibility, shadow-free illumination and enhanced product display.
- **ILLUMINATED SIGN PANEL**
  This LED back-lit panel adds a pleasant atmosphere to your store or restaurant while helping your product stand out. Allows for easy customization .



ARMD-35A-SD



ARMD-69A-SD

OPTIONS & ACCESSORIES

- Additional epoxy coated shelves
- 2.5" Casters / 4" Casters
- 6" Adjustable stainless steel legs
- 220V-50 cycles- 1 phase

ISO 9001


MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Lenght	Cabinet Dimensions L"	D"	H"	Shipping Wt. lbs.	Cubes
REFRIGERATORS													
ARMD-35A-SD	2	35	8	6.9	1/3	115/60/1	5-15P	8'	43 1/2	32	78 5/8	347	70
ARMD-47A-SD	2	47	8	6.9	1/3	115/60/1	5-15P	8'	54	32	72 5/8	391	88
ARMD-69A-SD	2	69	12	10.3	1/3	115/60/1	5-15P	8'	85 15/16	32	78 5/8	560	140

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

PLAN VIEW

Merchandisers
SLIDING DOOR

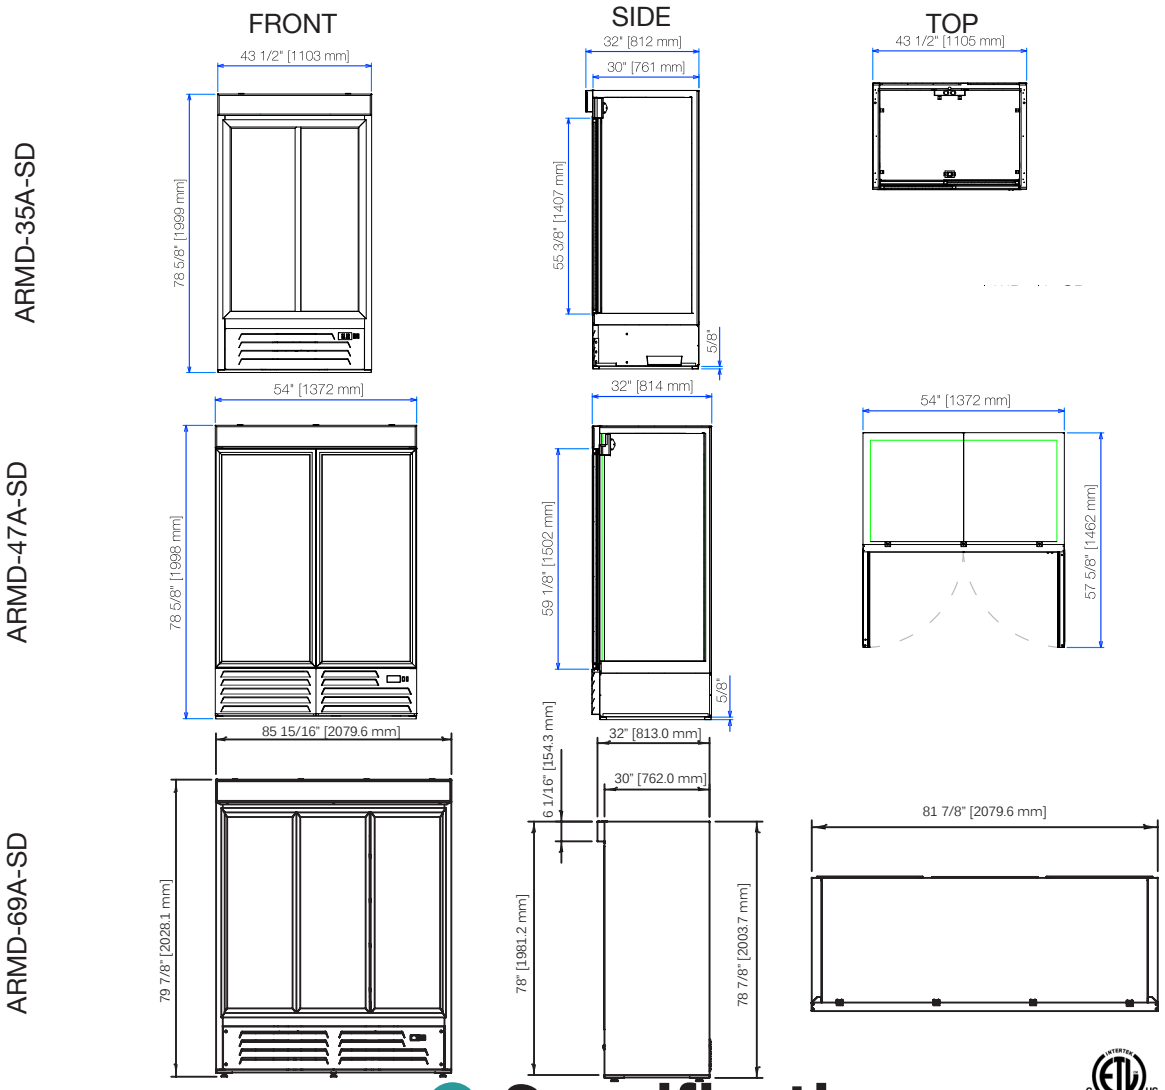

ISO 9001

Specifications

CONSTRUCTION

- Our merchandisers boast a sturdy stainless steel floor and easy to clean, NSF approved white coated steel. Exterior is no-chip white vinyl. Also available in black as special order from factory.
- "Low-E" consumption LED interior lights lasts up to 10 times longer compared to flourescent light, providing greater visibility, shadow-free illumination and enhanced product display.

DOORS & SHELVES

- "Low E" double pane thermal insulated glass doors with a self-closing and counter balanced system for convenience and efficiency.
- Adjustable epoxy coated wire shelves.

REFRIGERATION SYSTEM

- Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F. ARMD-69-SD use R-404A.
- Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- Large fan motor and fan blades for better air circulation.
- Analog temperature control system allows customers to keep the utmost food quality for a longer period of time.
- Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year:** Labor and parts warranty.
- **Five year:** Compressor warranty.
- **International:** One year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

Reach-Ins | SOLID DOOR

- ARR - 17
- ARF - 17

STANDARD FEATURES

- **DURABLE CONSTRUCTION**
  Our reach-in 17 cu. ft. unit boast a sturdy stainless steel floor, interior and exterior finish. Galvanized back panel providing strength and durability.
- **ERGONOMICALLY DESIGNED DOORS**
  Standard solid and glass doors come with easy grip handles and self closing/90 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the freezer gasket.
- **DIGITAL CONTROLLER**
  This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.
- **HIGH DENSITY POLYURETHANE INSULATION**
  Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F and freezers maintain -10°F for storage of frozen foods.
- **BOTTOM MOUNT COMPRESSOR**
  Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- **DOORS**
  Field reversible door.
- **SHELVES**
  Adjustable epoxy coated wire shelves.
- **INCANDESCENT LIGHT & SWIVEL CASTERS**
  Interior incandescent light and 4"diameter swivel casters, front two with brakers.



ARR(F) - 17

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /
6" Adjustable stainless steel legs / 220V-50 cycles- 1 phase

ISO 9001

MODEL	DOORS	CAPACITY (Cu.Ft)	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	Cord Lenght	Cabinet Dimensions L"	D"	H"*	Shipping Wt. lbs.	Cubes
REFRIGERATORS													
ARR-17	1	17	3	5.6	1/4	115/60/1	5-15P	8'	27	26	72	240	37
ARF-17	1	17	3	8.8	1/2+	115/60/1	5-15P	8'	27	26	72	272	37

* Height does not include 5" overall for casters.


13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


PLAN VIEW

Reach Ins
SOLID DOOR


ARR(F)-17 Front

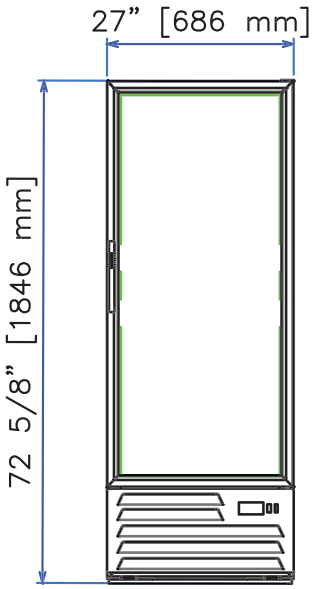

ARR(F)-17 Side

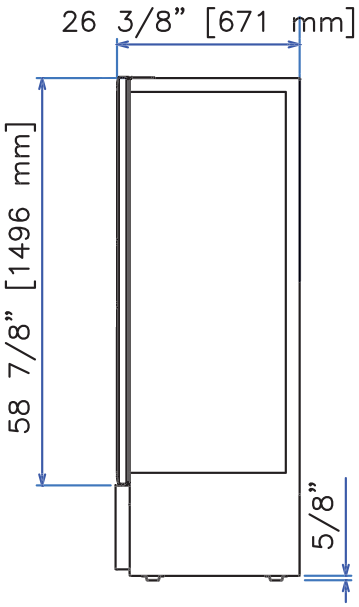

ARR(F)-17 Top

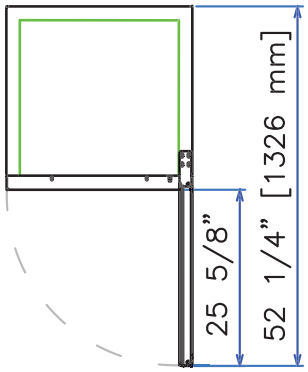

Specifications

ISO 9001

CONSTRUCTION

- Our reach-in 17 cu. ft. unit boast a sturdy stainless steel floor, interior and exterior finish. Galvanized back panel providing strength and durability.
- Solid door units come with interior incandescent and all units have 4” diameter swivel casters, front two with brakers.

DOORS & SHELVES

- Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door’s in step design gives added protection to the freezer gasket.
- 3 Adjustable epoxy coated wire shelves per unit.

REFRIGERATION SYSTEM

- Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F and freezers maintain -10°F for storage of frozen foods.
- Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- Large fan motor and fan blades for better air circulation.
- Digital temperature control system on this 17 cu. ft refrigerator allows customers to keep the utmost food quality for a longer period of time.
- Ecomate® CFC-free polyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year:** Labor and parts warranty.
- **Five year**: Compressor warranty.
- I**nternational:** One year parts only.

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

Reach-ins | REFRIGERATORS & FREEZERS

- ☐ ARR-23
- ☐ ARR-49
- ☐ ARR-72
- ☐ ARR-23-1G
- ☐ ARR-49-2G
- ☐ ARR-72-3G
- ☐ ARF-23
- ☐ ARF-49
- ☐ ARF-72

STANDARD FEATURES

- **DURABLE STAINLESS STEEL**
  Our reach-ins boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.
- **ERGONOMICALLY DESIGNED DOORS WITH LOCKS**
  Standard solid and glass doors come with easy grip handles and self closing/90 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- **DIGITAL CONTROLLER**
  This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.
- **HIGH DENSITY POLYURETHANE INSULATION**
  2-3/8 inches Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33°F to 38°F, 3 door refrigerator is R-404A.
  R-404A Freezers maintain temperature at -10°F, for single door, double and triple door -8°F.
- **BOTTOM MOUNT COMPRESSOR**
  Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- **ALL BASIC PAN SIZES ACCEPTED,** including 18" x 26".
- **DUAL PANE GLASS DOORS**
  "G" model units come with dual pane glass doors with aluminium frames and LED interior lights for better operation and efficiency.
- **INCANDESCENT LIGHT & SWIVEL CASTERS**
  Solid door units come with interior incandescent and all units have 4" diameter swivel casters, front with two brakes.



ARR(F)-23



ARR(F)-49



ARR(F)-72

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /
6" Adjustable stainless steel legs / Factory reverse door hinging / 220V-50 cycles- 1 phase

ISO 9001

MODEL	DOORS	CAPACITY (Cu.Ft)	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D	H*	SHIPPING WT.	CUBES
REFRIGERATOR													
ARR-23	1	23	3	5.6	1/4	115	5-15P	8'	27-1/2"	31"	75-1/4"	295	51
ARR-49	2	49	6	6.9	1/3	115	5-15P	8'	55-1/2"	31"	75-1/4"	465	95
ARR-72	3	72	9	12.7	3/4	115	5-15P	8'	81-7/8"	32"	79-1/2"	665	155
ARR-23-1G	1	23	3	6.0	1/4	115	5-15P	8'	27-1/2"	31"	75-1/4"	315	51
ARR-49-2G	2	49	6	7.3	1/3	115	5-15P	8'	55-1/2"	31"	75-1/4"	515	95
ARR-72-3G	3	72	9	12.7	3/4	115	5-15P	8'	81-7/8"	32"	79-1/2"	705	155
FREEZER													
ARF-23	1	23	3	8.5	3/4	115	5-15P	8'	27-1/2"	31"	75-1/4"	315	51
ARF-49	2	49	6	12.9	1	115	5-15P	8'	55-1/2"	31"	75-1/4"	500	95
ARF-72	3	72	9	14.5	1	115	5-20P	8'	81-7/8"	32"	79-1/2'	685	155

* Asber's specification are subject to change without notice as we continue to make product improvements.


13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


PLAN VIEW

Reach-ins
REFRIGERATORS & FREEZERS


ARR(F) - 23 Top




ARR(F) - 49 Top




ARR(F) - 72 Top

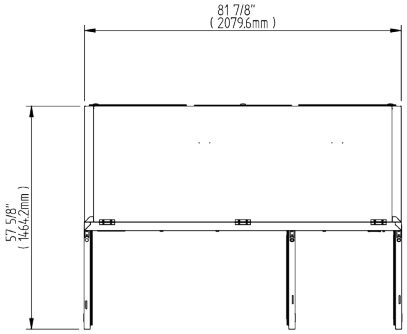


ARR (F) - 23 Front

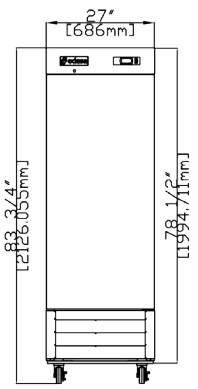


ARR(F)- 49 Front

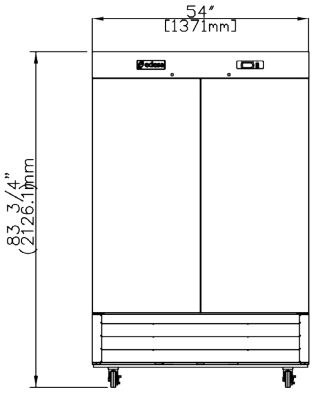

ARR(F)- 72 Front

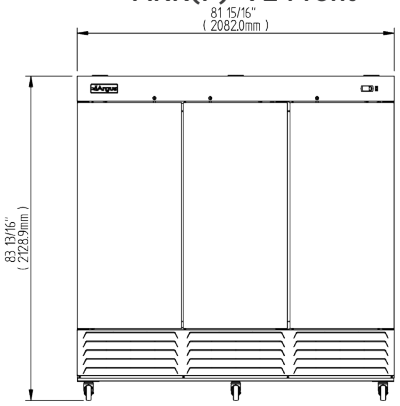

ARR(F)
Common View

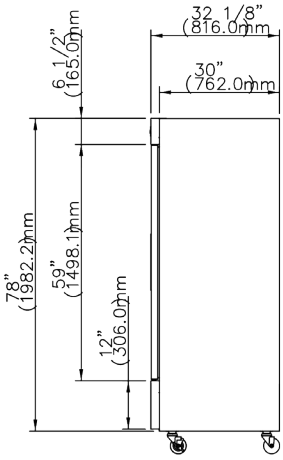

Specifications

ISO 9001

CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : entire foamed-in-place high-density, Ecomate® CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front with brakes.
- SHELVES: 3 Adjustable epoxy coated wire shelves per door.

DOORS

- Solid doors have stainless steel front and interior. "G" glass door models are dual pane with aluminium frame.
- Doors in step design gives added protection to the gasket.
- GASKETS: One piece construction magnetic gasket, removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 90° stay open feature for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators. R-404A for 3 door Refrigerator.
- R-404A holding temperature at -10°F Freezers for single doors and -8°F on double and triple doors.
- Self-contained capillary tube system using environtmentally friendly refrigerant Ecomate® (CFC free).
- Bottom mount compressor with service friendly rail system.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50 Hz/ 1 Ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

asber

Under Counters

REFRIGERATORS & FREEZERS

- ☐ AUTR-27
- ☐ AUTR-48
- ☐ AUTR-60
- ☐ AUTF-27-HC
- ☐ AUTF-48-HC
- ☐ AUTR-72

STANDARD FEATURES

- **DURABLE STAINLESS STEEL**
  Our undercounters boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.
- **ERGONOMICALLY DESIGNED SOLID DOORS**
  Standard doors come with easy grip handles and self closing/120 ° stay open door feature , working together for customer convenience while ABS door liner provides thermal efficiency.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -8°F. "HC" Freezer models use R-290.
- **FRONT BREATHING**
  Allows unrestricted placement of the unit.
- **HIGH DENSITY POLYURETHANE INSULATION**
  Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **COVED CORNERS**
  Inside the cabinet to meet NSF requirements.
- **2 ADJUSTABLE WIRE SHELVES PER DOOR**
  Heavy duty, epoxy coated.

AUTR(F)-27





AUTR-60



AUTR-72

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5"Casters /
6" Adjustable stainless steel legs / Factory reverse door hinging /
220V-50 cycles- 1 phase

ISO 9001

MODEL	DOORS	CAPACITY (Cu.Ft)	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D*	H**	SHIPPING Wt.	Cubes
REFRIGERATOR													
AUTR-27	1	6.1	2	2.7	1/6	115/60/1	5-15P	8'	27"	30"	31"	174	21
AUTR-48	2	11.8	4	5.4	1/4	115/60/1	5-15P	8'	48"	30"	31"	260	35
AUTR-60	2	15.0	4	6.7	1/3	115/60/1	5-15P	8'	60"	30"	31"	301	47
AUTR-72	3	18.2	6	6.7	1/3	115/60/1	5-15P	8'	72"	30"	31"	342	56
FREEZER													
AUTF-27-HC	1	6.1	2	8.2	3/4	115/60/1	5-15P	8'	27"	30"	31"	185	21
AUTF-48-HC	2	11.8	4	8.5	3/4	115/60/1	5-15P	8'	48"	30"	31"	319	35

* Depth does not include 1" rear bumper
**Height does not include 5" overall for casters

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON


asber

PLAN VIEW


Under Counters

REFRIGERATORS & FREEZERS


AUTR-27 Top




AUTR-48 Top



AUTR-60 Top



AUTR-72 Top

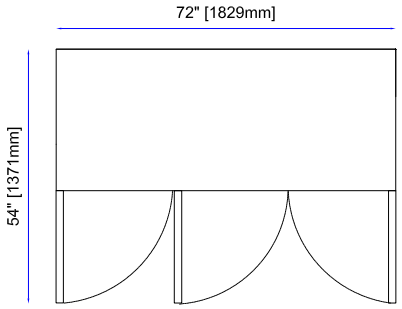


AUTR-27 Front


AUTR-48 Front

AUTR-60 Front

AUTR-72 Front

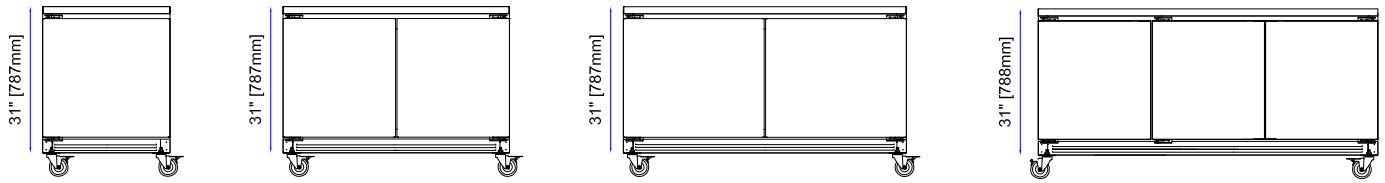

Side Common view



Specifications

ISO 9001

CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : Entire foamed-in-place high-density, CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front two with breaks.
- SHELVES: 2 Adjustable heavy duty epoxy coated wire shelves per door.

DOORS

- Stainless steel exterior with ABS interior liner.
- One piece constructions magnetic gasket, removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators. R-404A holding temperature at -10°F Freezers. "HC" models use R-290
- Self-contained capillary tube system using environtmentally friendly refrigerant (CFC free).
- Front breathing allows unrestricted placement of the unit.
- Reinforced condensate system, automatic defrost on refrigerators with electronic control for freezers.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Access for the condensating unit behind the front grill, slides out for easy cleaning and maintenance.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50 Hz/ 1 Ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

asber

Salad & Sandwich Prep Tables

- ☐ APTS-27-8
- ☐ APTS-48-12
- ☐ APTS-60-16
- ☐ APTS-72-18

STANDARD FEATURES

- **DURABLE STAINLESS STEEL**
  Our prep tables boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.
- **ERGONOMICALLY DESIGNED SOLID DOORS**
  Standard doors come with easy grip handles and self closing/120 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33°F to 41°F. Forced air design underneath pans to keep products fresh.
- **FRONT BREATHING**
  Allows unrestricted placement of the unit.
- **HIGH DENSITY POLYURETHANE INSULATION**
  2" Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **INSULATED LIDS**
  Removable insulated lids keep food fresh and cold by reducing condensation.
- **REVERSIBLE & EASY CLEANING CUTTING BOARD**
  The full length removable white polyethylene cutting board provides a comfortable 10" operation space.
- **STANDARD WITH FULL SETS OF 1/6th PANS, 4" DEEP**
  It also accomodate 6" deep pans (except for APTS-27: has two 1/9th size pans).



APTS-27-8



APTS-60-16



APTS-72-18

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5"Casters /
6" Adjustable stainless steel legs / 220V-50 cycles- 1 phase

ISO 9001

MODEL	DOORS	TOP PANS	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D*	H**	SHIPPING Wt.	Cubes
REFRIGERATOR													
APTS-27-8	1	8	1	2.7	1/6	115/60/1	5-15P	8'	27"	30"	38"	188	33
APTS-48-12	2	12	2	5.4	1/4	115/60/1	5-15P	8'	48"	30"	38"	280	55
APTS-60-16	2	16	2	6.7	1/3	115/60/1	5-15P	8'	60"	30"	38"	320	68
APTS-72-18	3	18	3	6.7	1/3	115/60/1	5-15P	8'	72"	30"	38"	370	81

* Depth does not include 1" rear bumper
**Height does not include 5" overall for casters

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


HUMANITY AT WORK MONDRAGON

asber


PLAN VIEW

Salad & Sandwich Prep Tables


APTS-27-8 Top




APTS-48-12 Top




APTS-60-16 Top




APTS-72-18 Top

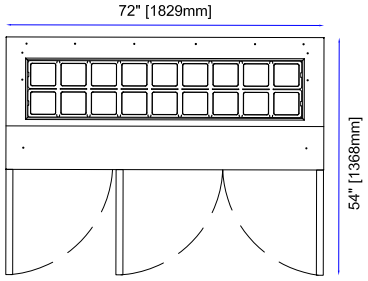


APTS-27-8 Front




APTS-48-12 Front




APTS-60-16 Front




APTS-72-18 Front



APTS-Common View

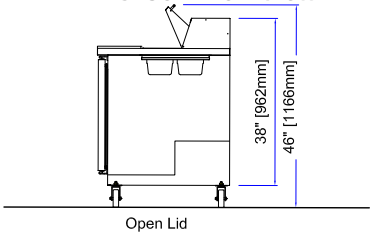

APTS-Common View

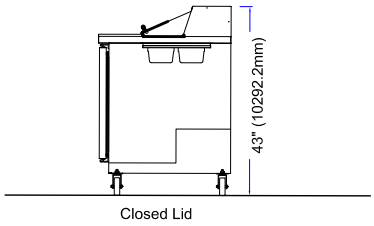

Specifications

ISO 9001

CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : Entire foamed-in-place high-density, Ecomate® CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- Casters: 4" Diameter swivel casters, front two with brakes.
- SHELVES: 1 Adjustable epoxy coated wire shelves per door.

DOORS

- Stainless steel exterior with ABS interior liner.
- One piece constructions magnetic gasket, removable without tools for easy cleaning.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134 A holding temperature at 33°F to 41°F Refrigerators
- Self-contained capillary tube system using environtmentally-friendly and CFC-free refrigerant.
- Front breathing allows unrestricted placement of the unit.
- Large fan motor and fan blades for better air circulation
- Self contained system, no plumbing necesarry

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V / 50Hz / 1Ph available from factory.

WARRANTY

Continental US & Canada :

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International**: one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

asber

Mega Top Tables

- ☐ APTM-27-12
- ☐ APTM-48-18
- ☐ APTM-60-24
- ☐ APTM-70-32

STANDARD FEATURES

- **DURABLE STAINLESS STEEL**
  Our megatops boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.
- **ERGONOMICALLY DESIGNED SOLID DOORS**
  Standard doors come with easy grip handles and self closing/120 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33°F to 41°F. Forced air design underneath pans to keep products fresh.
- **FRONT BREATHING**
  Allows unrestricted placement of the unit.
- **HIGH DENSITY POLYURETHANE INSULATION**
  2" Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **INSULATED LIDS**
  Removable insulated lids keep food fresh and cold by reducing condensation.
- **REVERSIBLE & EASY CLEANING CUTTING BOARD**
  The full length removable white polyethylene cutting board provides a comfortable 10" operation space.
- **STANDARD WITH FULL SETS OF 1/6th PANS, 4" DEEP**
  It also accomodate 6" deep pans (except for APTM-27: has three 1/9th size pans).



APTM-27-12



APTM-48-18



APTM-72-30

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5"Casters /
6" Adjustable stainless steel legs / 220V-50 cycles- 1 phase

ISO 9001

MODEL	DOORS	TOP PANS	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D*	H**	SHIPPING Wt.	Cubes
REFRIGERATOR													
APTM-27-12	1	12	1	5.1	1/6	115/60/1	5-15P	8'	27"	34"	41-5/8"	225	36
APTM-48-18	2	18	2	6.0	1/4	115/60/1	5-15P	8'	48"	34"	41-5/8"	327	55
APTM-60-24	2	24	2	7.3	1/3	115/60/1	5-15P	8'	60"	34"	41-5/8"	380	73
APTM-72-30	3	30	3	8.0	1/3	115/60/1	5-15P	8'	72"	34"	41-5/8"	465	87

* Depth does not include 1" rear bumper
**Height does not include 5" overall for casters

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780


asber

HUMANITY AT WORK MONDRAGON


PLAN VIEW

Mega Top Tables


APTM-27-12 Top




APTM-48-18 Top




APTM-60-24 Top




APTM-70-32 Top




APTM-27-12 Front




APTM-48-18 Front




APTM-60-24 Front



APTM-70-32 Front



APTM-27-12 Common View

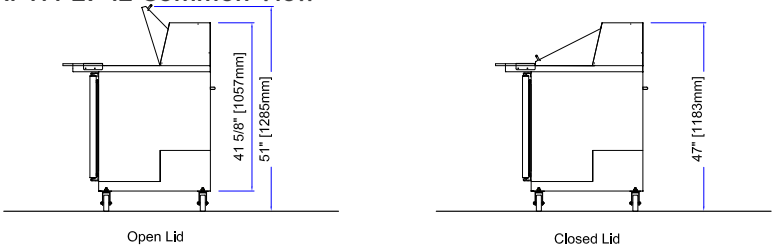

Specifications

ISO 9001

CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : Entire foamed-in-place high-density, Ecomate® CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diamenter swivel casters, front two with brakes.
- SHELVES: 1 Adjustable heavy duty epoxy coated wire shelves per door.

DOORS

- Stainless steel exterior with ABS interior liner.
- One piece constructions magnetic gasket, removable without tools for easy cleaning.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 41°F Refrigerators.
- Self-contained capillary tube system using environtmentally-friendly and CFC-free refrigerant.
- Front breathing allows unrestricted placement of the unit.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V / 50Hz / 1Ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

Pizza Tables

☐ APTP-46 ☐ APTP-67 ☐ APTP-93

STANDARD FEATURES

- **DURABLE STAINLESS STEEL**
  Our tables boast a sturdy stainless steel exterior and interior finish and galvanized back panel provides strength and durability.
- **ERGONOMICALLY DESIGNED SOLID DOORS**
  Standard doors come with easy grip handles and self closing/120 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33°F to 38°F. Forced air design underneath pans to keep products fresh.
- **FRONT BREATHING**
  Allows unrestricted placement of the unit.
- **HIGH DENSITY POLYURETHANE INSULATION**
  2" Ecomate® CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **INSULATED LIDS**
  Removable insulated lids keep food fresh and cold by reducing condensation.
- **REVERSIBLE & EASY CLEANING CUTTING BOARD**
  This 19" deep cutting board provides ample & comfortable operation space. Made of white polyethylene, it is also full length removable and reversible for durability and easy cleaning.
- **STANDARD WITH FULL SETS OF 1/3rd PANS, 6" DEEP**
- **SHELVES ON RAIL SYSTEM THAT CAN ALSO ACCOMODATE (2) 12" X 20" FOODSERVICE PANS AND 18X26 SHEET PAN**
  Pans sold separately.



APTP-46



APTP-67



APTP-93

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5"Casters / Universal tray slides (pair) for 18" x 26' pans. / 6" Adjustable stainless steel legs / 220V-50 cycles- 1 phase

ISO 9001

MODEL	DOORS	TOP PANS	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D*	H**	SHIPPING Wt.	Cubes
REFRIGERATOR													
APTP-46	1	6	2	5.4	1/4	115/60/1	5-15P	8'	46"	36-1/8"	39-1/8"	328	63
APTP-67	2	9	4	6.5	1/3	115/60/1	5-15P	8'	67-1/4 "	36-1/8"	39-1/8"	446	73
APTP-93	3	12	6	6.5	1/3	115/60/1	5-15P	8'	93"	36-1/8"	39-1/8"	556	92

*Depth does not include 1" bumper


**Height does not include 6" overall for casters

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780


asber

PLAN VIEW


Pizza Tables

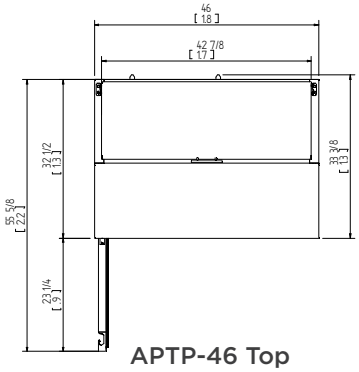


APTP-46 Top

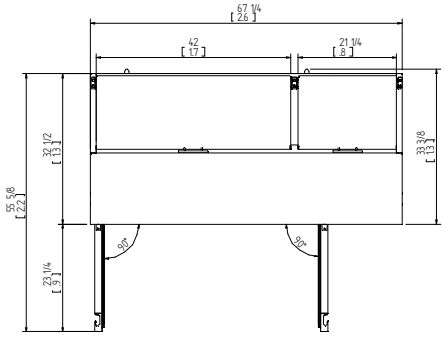


APTP-67 Top

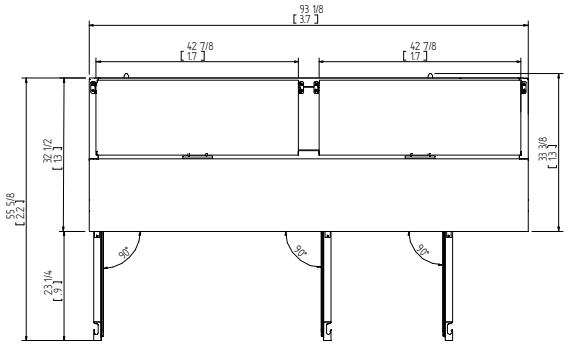


APTP-93 Top




APTP-46 Front

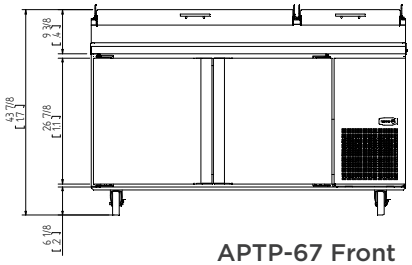

APTP-67 Front

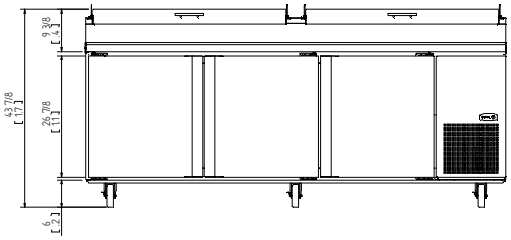

APTP-93 Front



APTP Side

Specifications

ISO 9001

CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR: Entire foamed-in-place high-density, Ecomate® CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 5" Diamenter swivel casters, front with brakes.
- SHELVES: On a rail system that can also accomodate (2) 12" x 20" foodservice pans per door. Pans sold separately.

DOORS

- Stainless steel.
- One piece constructions magnetic gasket, removable without tools for easy cleaning and replacement.
- Self-closing doors with 120° stay open feature and recessed handles for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators.
- Self-contained capillary tube system using environtmentally-friendly and CFC-free refrigerant.
- Front breathing allows unrestricted placement of the unit.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Access for the condensing unit behind the front grill slides out for easy cleaning and maintenance.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V / 50Hz / 1Ph available from factory.

WARRANTY

Continental US & Canada :

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

Bottle Coolers

- ☐ ADBC-50
- ☐ ADBC-65
- ☐ ADBC-80
- ☐ ADBC-94

STANDARD FEATURES

- **HEAVY DUTY CONSTRUCTION**

  Top is made of solid 18" gauge stainless steel for easy cleaning and anodized aluminum bottle rails. Wear resistant black vinyl exterior, and galvanized interior and coved corners.

  Compressor is mounted on the right side with service friendly slide out rail system.

- **ENHANCED REFRIGERATION SYSTEM**

  Factory engineered oversized and balanced refrigeration system. CFC free R-134a refrigerators maintain temperature between 28°F to 38°F, keeping beers ice cold.

- **ANALOG THERMOSTAT**

- **HIGH DENSITY POLYURETHANE INSULATION**

  The entire unit has a Ecomate® CFC free polyurethane insulation foamed in place for extra strength and energy efficiency.

- **RUGGED, REMOVABLE BOTTLE CAP OPENER AND CAP CATCHER.**

- **HEAVY DUTY ADJUSTABLE BIN DIVIDERS, EPOXY COATED**.



ADBC-50



ADBC-65



ADBC-94

OPTIONS & ACCESSORIES

Additional bin dividers

3" Casters

6" Adjustable stainless steel legs

220V-50Hz-1Phase

Stainless Steel Bar Equipment

ISO 9001

MODEL	LIDS	CAPACITY 12 Oz Can	CAPACITY 12 Oz Bottles	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D *	H	SHIPPING WT.	CUBES
SOLID DOOR													
ADBC-50	2	704	286	5.9	1/4	115/60/1	5-15P	8'	50 1/2"	26 1/2"	33 3/8"	236	37
ADBC-65	2	890	360	6.2	1/3	115/60/1	5-15P	8'	65 1/2"	26 1/2"	33 3/8"	275	50.5
ADBC-80	3	1,150	547	6.2	1/3	115/20/1	5-15P	8	80"	26 1/2"	33 3/8"	315	57
ADBC-94	3	1,408	672	6.2	1/2	115/60/1	5-15P	8'	95"	26 1/2"	33 3/8"	379	69

* Depth does not include 1" bumper


13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


PLAN VIEW

Bottle Coolers


ABDC-50 Top




ADBC-65 Top

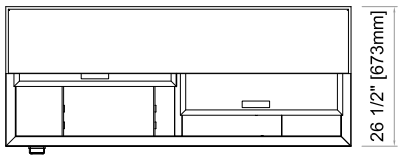


ADBC-80 Top

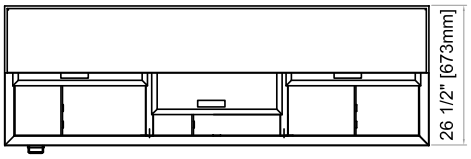


ADBC-50 Front




ADBC-65 Front

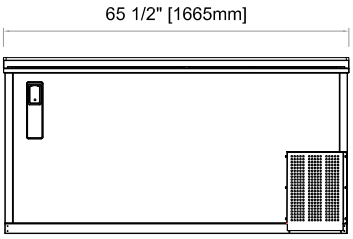


ADBC-80 Front

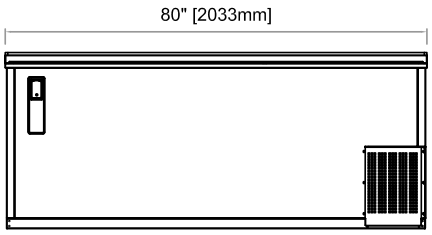


ADBC-94 Top

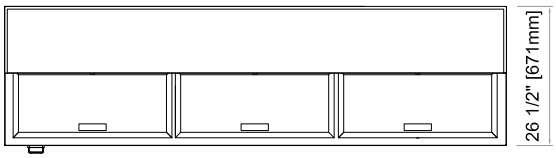

ADBC-94 Front

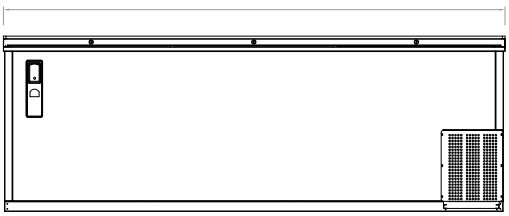

ADBC Common View



Specifications

ISO 9001

CONSTRUCTION

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with coved corner stainless steel floor.
- The entire cabinet has a 1-1/2" Ecomate® CFC-free, polyurethane insulation foamed-in-place.

STANDARD EXTRAS

- Rugged, removable bottle cap opener and cap catcher.
- Heavy duty adjustable bin dividers, epoxy coated.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environtmentally-friendly and CFC-free refrigerant. R-134a holding temperature at 28°F to 38°F.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for esay cleaning and maintenance.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Analog thermostat.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

Glass Frosters

☐ AGF-24 ☐ AGF-36 ☐ AGF-50

STANDARD FEATURES

- **HEAVY DUTY CONSTRUCTION**

  Top is made of solid 18" gauge stainless steel for easy cleaning and anodized aluminum bottle rails. Wear resistant black vinyl exterior, and galvanized interior walls, stainless steel interior floor and coved corners.

  Compressor is mounted on the right side with service friendly slide out rail system.

- **ENHANCED REFRIGERATION SYSTEM**

  Factory engineered oversized and balanced refrigeration system. CFC free R-134A for AGF-24 and R-404A for AGF-36 & 50 maintain temperature below 0°F for the best in chilling glasses.

- **DIGITAL THERMOSTAT**

- **HIGH DENSITY POLYURETHANE INSULATION**

  The entire unit has a Ecomate® CFC free polyurethane insulation foamed in place for extra strength and energy efficiency.

- **3 COMPARTMENT LEVELS WITH EXCLUSIVE SLIDING RACK SYSTEM**



AGF-24



AGF-36



AGF-50

OPTIONS & ACCESSORIES

220V-50Hz-1Phase

Stainless steel bar equipment

ISO 9001

MODEL	LIDS	SHELVES	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CAPACITY 8 OZ MUGS	CAPACITY 10 OZ MUGS	CABINET DIMENSIONS L	D *	H	SHIPPING WT.	CUBES
SOLID DOOR														
AGF-24	1	6	8.0	1/6	115/60/1	5-15P	8'	35	96	24 5/8"	26 7/8"	35 3/8"	172	13
AGF-36	1	6	8.0	1/3	115/60/1	5-15P	8'	60	162	36 5/8"	26 7/8"	35 3/8"	234	19.7
AGF-50	2	6	8.5	1/3	115/20/1	5-15P	8	84	234	49 5/8"	26 7/8"	35 3/8"	269	27.5

* Depth does not include 1" bumper

* Asber's specification are subject to change without notice as we continue to make product improvements.


13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


PLAN VIEW

Glass Frosters


AGF-24 Top

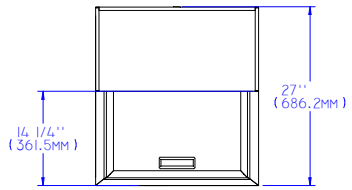


AGF-36 Top

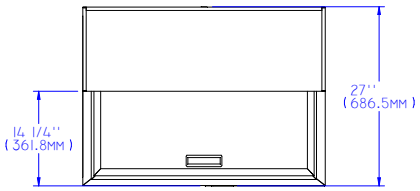


AGF-50 Top

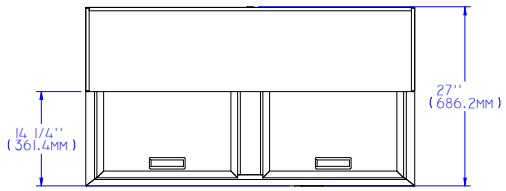


AGF-24 Front




AGF-36 Front




AGF-50 Front

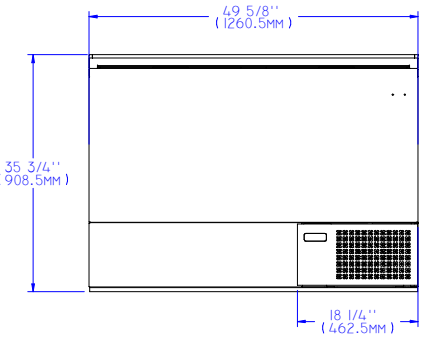


AGF-24 Side



AGF-36 Side



AGF-50 Side

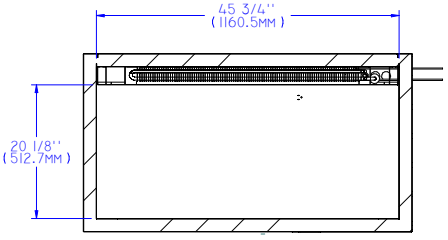

Specifications

ISO 9001

CONSTRUCTION

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with coved corner and stainless steel floor. Interior fluorescent light.
- The entire cabinet has a 2" Ecomate® CFC-free, polyurethane insulation foamed-in-place.

STANDARD EXTRAS

- 3 compartment levels with exclusive sliding rack system, epoxy coated.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environtmentally-friendly and CFC-free refrigerant. R-134a for AGF-24 and R-404A for AGF-36 and 50 holding temperature below 0°F for the best in chilling glasses.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for esay cleaning and maintenance.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Digital thermostat.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

www.asberusa.com

HUMANITY AT WORK MONDRAGON

Back Bars | SOLID & GLASS DOOR

- ☐ ABBC-58
- ☐ ABBC-68
- ☐ ABBC-78
- ☐ ABBC-94
- ☐ ABBC-58G
- ☐ ABBC-68G
- ☐ ABBC-78G
- ☐ ABBC-94G

STANDARD FEATURES

- **HEAVY DUTY CONSTRUCTION**
  Top is made of solid 18" gauge stainless steel for easy cleaning.
  Wear resistant black vinyl exterior, and galvanized interior with durable stainless steel floor, and coved corners.
  Ecomate® insulation foamed in place.
- **FIELD INTERCHAGEABLE DOORS**
  Solid to Glass and Glass to Solid based on operator's needs.
- **DUAL PANE THERMAL GLASS in "G" Models**
  Black aluminum frame, merchandise your product with greater visibility.
- **ENHANCED REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system.
  CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.
- **LEFT SIDE MOUNT COMPRESSOR & FRONT BREATHING**
  System allows easy service and unrestricted placement for the unit even in narrow spaces.
- **ANALOG THERMOSTAT**
- **STAY OPEN DOORS WITH LOCKS AND LIGHT**
  90° Stay open door feature and LED light underneath the mullion.
- **ADJUSTABLE, COATED WIRE SHELVES**
  Creating three levels to fit tall boy beers.
- **GREATER USABLE INTERIOR CAPACITY**
  Evaporator located on left side above compressor providing greater working interior capacity: 23-1/4" Depth x 32-1/2" Height.
- **MAGNETIC GASKET**
  Built of one piece, the gaskets are removable without tools for ease of cleaning and replacement.



ABBC-58(G)



ABBC-94

OPTIONS & ACCESSORIES

Additional shelves / 3" Rails Casters /
6" Adjustable stainless steel legs / 220v-50Hz-1Phase

ISO 9001

MODEL	DOORS	CAPACITY 12 Oz Can	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D *	H	SHIPPING WT.	CUBES
SOLID DOOR													
ABBC-58	2	852	4	6.6	1/3	115/60/1	5-15P	8'	59 1/2"	28"	37"	307	51
ABBC-68	2	1,014	4	6.6	1/3	115/60/1	5-15P	8'	69 1/2"	28"	37"	332	59
ABBC-78	3	1,092	6	6.9	1/3	115/60/1	5-15P	8'	80"	28"	37"	396	68
ABBC-94	3	1,150	6	7.2	1/3	115/60/1	5-15P	8'	95 1/2"	28"	37"	429	81
GLASS DOOR													
ABBC-58G	2	852	4	6.6	1/3	115/60/1	5-15P	8'	59 1/2"	28"	37"	332	51
ABBC-68G	2	1,014	4	6.6	1/3	115/60/1	5-15P	8'	69 1/2"	28"	37"	357	59
ABBC-78G	3	1,092	6	6.9	1/3	115/60/1	5-15P	8'	80"	28"	37"	396	68
ABBC-94G	3	1,150	6	7.2	1/3	115/60/1	5-15P	8'	95 1/2"	28"	37"	429	81

* Depth does not include 1" bumper


13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


PLAN VIEW

Back Bars
SOLID & GLASS DOORS


ABBC-58(G) Front




ABBC-68(G) Front

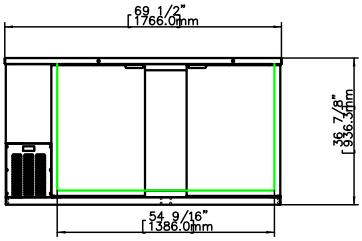


ABBC-78(G) Front

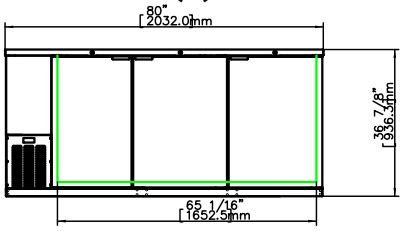


ABBC-58(G) Top

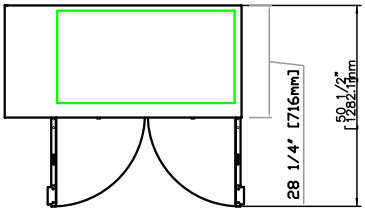


ABBC-68(G) Top

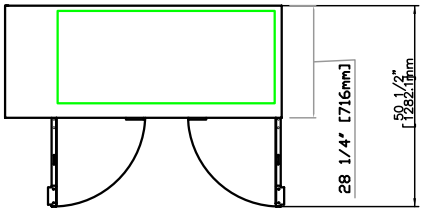


ABBC-78(G) Top

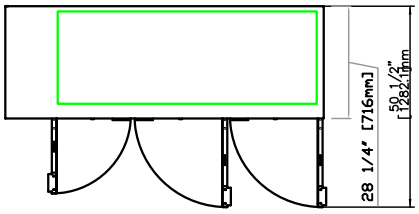


ABBC-94(G) Front

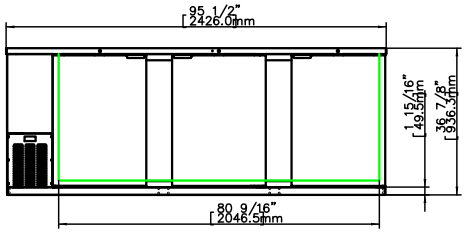

ABBC-94(G) Top

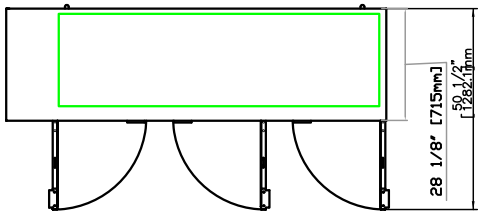

ABBC-Common View



Specifications

ISO 9001

CONSTRUCTION

- Stainless steel 18 gauge top and stylish black vinyl finish front, sides and back. Interior built is galvanized steel walls with coved corner stainless steel floor. Interior LED light.
- The entire cabinet has 1-1/2" Ecomate® CFC-free polyurethane insulation foamed in place.

DOORS & SHELVES

- Field interchageable doors from Solid to Glass and glass to solid. With 90° stay open feature, light and locks standard. One piece magnetic gasket for easy cleaning.
- Dual pane glass doors in "G" models with black aluminum frame.
- Adjustable, coated wire shelves, two per door, standard.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environtmentally-friendly & CFC-free refrigerant. R-134a holding temperature at 33°F to 38°F.
- Front breathing/side mounted compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for easy cleaning and maintenance.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Analog thermostat.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

www.asberusa.com

HUMANITY AT WORK MONDRAGON

asber

Back Bars SLIM LINE

SOLID & GLASS DOOR

- ☐ ABBC-24-48
- ☐ ABBC-24-60
- ☐ ABBC-24-72
- ☐ ABBC-24-48G
- ☐ ABBC-24-60G
- ☐ ABBC-24-72G

STANDARD FEATURES

- **HEAVY DUTY CONSTRUCTION**
  Top is made of solid 18" gauge stainless steel for easy cleaning.
  Wear resistant black vinyl exterior, and galvanized interior with durable stainless steel floor, and coved corners.
  Ecomate® insulation foamed in place.
- **FIELD INTERCHAGEABLE DOORS**
  Solid to Glass and Glass to Solid based on operator's needs.
- **DUAL PANE THERMAL GLASS in "G" Models**
  Black aluminum frame, merchandise your product with greater visibility.
- **ENHANCED REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system.
  CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.
- **LEFT SIDE MOUNT COMPRESSOR & FRONT BREATHING**
  System allows easy service and unrestricted placement for the unit even in narrow spaces.
- **ANALOG THERMOSTAT**
- **STAY OPEN DOORS WITH LOCKS AND LIGHT**
  90° Stay open door feature and LED light underneath the mullion.
- **ADJUSTABLE, COATED WIRE SHELVES**
  Creating three levels to fit tall boy beers.
- **OPEN CAVITY**
  Evaporator located on left side above compressor providing open cavity and more working room.
- **MAGNETIC GASKET**
  Built of one piece, the gaskets are removable without tools for ease of cleaning and replacement.



ABBC-24-48



ABBC-24-60G

OPTIONS & ACCESSORIES

Additional shelves / 3" Casters / Stainless Steel Bar Equipment /
6" Adjustable stainless steel legs / 220v-50Hz-1Phase

ISO 9001

MODEL	DOORS	CAPACITY 12 Oz Can	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	KEGS	CABINET DIMENSIONS L	D *	H	SHIPPING WT.	CUBES
SOLID DOOR													
ABBC-24-48	2	300	4	7.4	1/4	115/60/1	5-15P	2	49 5/8"	24 5/8"	35 1/2"	213	48
ABBC-24-60	2	390	4	8.4	1/4	115/60/1	5-15P	3	62 3/4"	24 5/8"	35 1/2"	266	55
ABBC-24-72	3	540	6	9.2	1/4	115/60/1	5-15P	3	72"	24 5/8"	35 1/2"	396	77
GLASS DOOR													
ABBC-24-48G	2	300	4	7.4	1/4	115/60/1	5-15P	2	49 5/8"	24 5/8"	35 1/2"	213	48
ABBC-24-60G	2	390	4	8.4	1/4	115/60/1	5-15P	3	62 3/4"	24 5/8"	35 1/2"	266	55
ABBC-24-72G	3	540	6	9.2	1/4	115/60/1	5-15P	3	72"	24 5/8"	35 1/2"	396	77

* Depth does not include 1" bumper

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780


asber

HUMANITY AT WORK MONDRAGON


Back Bars
SLIM LINE

SOLID & GLASS DOOR


ABBC-24-48(G) Top

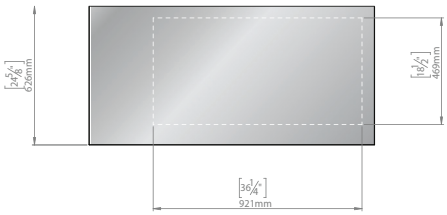


ABBC-24-60(G) Top

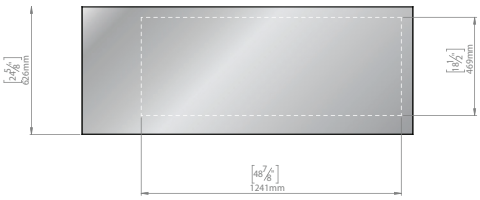


ABBC-24-72(G) Top

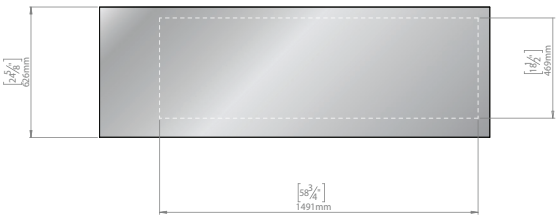


ABBC-24-48(G) Front

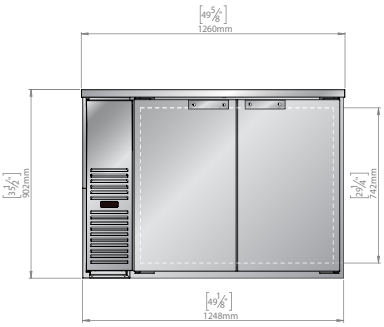


ABBC-24-60(G) Front

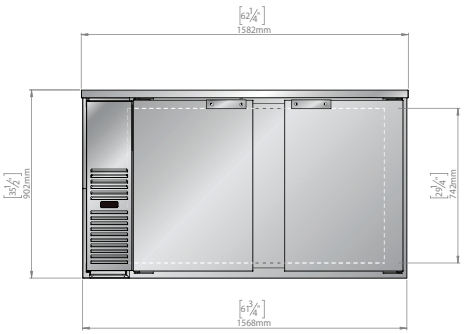

ABBC-24-72(G) Front

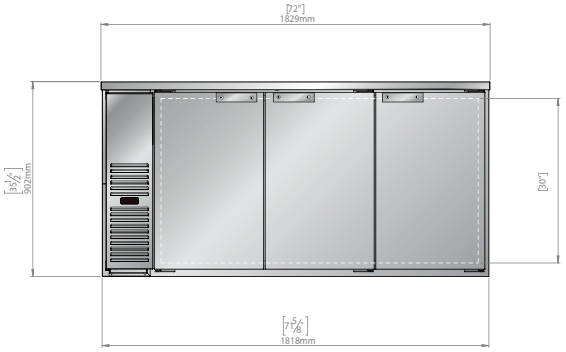

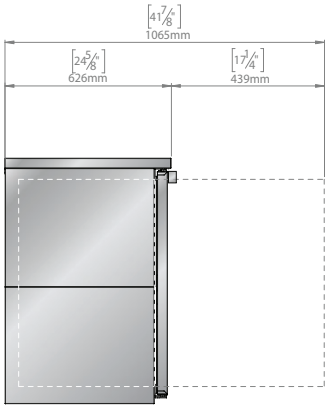

ABBC-Common View

Specifications

ISO 9001

CONSTRUCTION

- Stainless steel 18 gauge top and stylish black vinyl finish front, sides and back. Interior built is galvanized steel walls with coved corner stainless steel floor. Interior LED light.
- The entire cabinet has 1-1/2" Ecomate® CFC-free polyurethane insulation foamed in place.

DOORS & SHELVES

- Field interchageable doors from Solid to Glass and glass to solid. With 90° stay open feature, light and locks standard. One piece magnetic gasket for easy cleaning.
- Dual pane glass doors in "G" models with black aluminum frame.
- Adjustable, coated wire shelves, two per door, standard.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environtmentally-friendly & CFC-free refrigerant. R-134a holding temperature at 33°F to 38°F.
- Front breathing/side mounted compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for easy cleaning and maintenance.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Analog thermostat.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

Direct Draw
BEER COOLERS

- ☐ ADDC-23
- ☐ ADDC-58
- ☐ ADDC-68
- ☐ ADDC-78
- ☐ ADDC-94

STANDARD FEATURES

- **HEAVY DUTY CONSTRUCTION**
  Top is made of solid 18" gauge stainless steel, including drip tray(s) for easy cleaning.
  Wear-resistant black vinyl exterior, galvanized interior with durable stainless steel floor, and coved corners.
  Drain is located in rear of cabinets to keep unit pristine at all times.
  Ecomate® insulation foamed in place.
- **POLISHED STAINLESS STEEL TOWERS**
  Draft towers are three inches in diameter, stainless steel with polyurethane insulation. The continuous flow of cold air thoughout tower results in a perfect pour.
- **CO2 GAS VALVE INCLUDED**
- **STAY OPEN DOORS WITH LOCKS AND LIGHT**
  90° Stay open door feature and interior LED light underneath the mullion.
- **MAGNETIC GASKETS**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement.
- **ENHANCED REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.
- **SIDE MOUNT COMPRESSOR & FRONT BREATHING**
  System allows easy service and unrestricted placement of the unit.
- **ANALOG THERMOSTAT**
- **INTERCHANGE DOORS**
  Field interchangeable doors from Solid to Glass or Glass to Solid based on operator's needs.
- **GREATER USABLE INTERIOR CAPACITY**
  Evaporator located on left side above compressor providing greater working interior capacity.
- **ADDC-23**
  Single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3"casters.

ADDC-23



ADDC-68



ADDC-94



OPTIONS & ACCESSORIES

Single / Double draft towers / 3" Rails Casters /
6" Adjustable stainless steel legs / Dunnage floor /
220v-50Hz-1Phase
Stainless Steel Bar Equipment

ISO 9001

MODEL	DOORS	TOWERS	TAPS	BARRELS	AMPS	HP	VOLTAGE	NEMA PLUG	Cabinet Dimensions L	D*	H	Shipping Wt.	Cubes
SOLID DOOR													
ADDC-23	1	1	1	1	2.5	1/6	115/60/1	5-15P	24 1/4"	30 1/2"	40 1/8"	165	23
ADDC-58	2	2	3	3	6.6	1/3	115/60/1	5-15P	59 1/2"	28"	37"	314	51
ADDC-68	2	2	3	3	6.6	1/3	115/60/1	5-15P	69 1/2"	28"	37"	370	59
ADDC-78	3	2	4	4	6.9	1/3	115/20/1	5-15P	80"	28 1/2"	36 3/4"	396	68
ADDC-94	3	2	4	5	7.2	1/3	115/60/1	5-15P	95 1/2"	28"	37"	409	81

* Depth does not include 1" bumper

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


HUMANITY AT WORK MONDRAGON

asber


PLAN VIEW

Direct Draw
BEER COOLERS


ADDC-23 Top




ADDC-58 Top

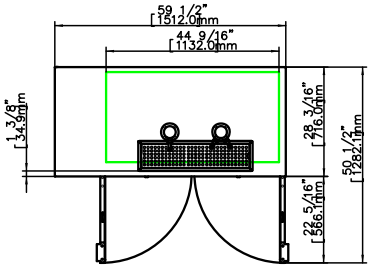


ADDC-68 Top

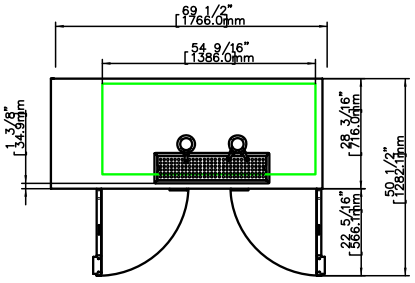


ADDC-78 Top

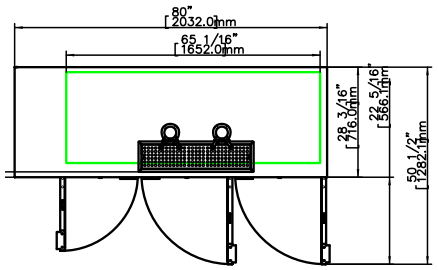


ADDC-23 Front




ADDC-58 Front




ADDC-68 Front

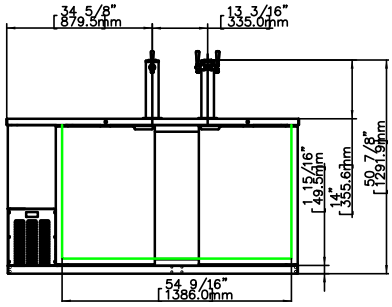


ADDC-78 Front

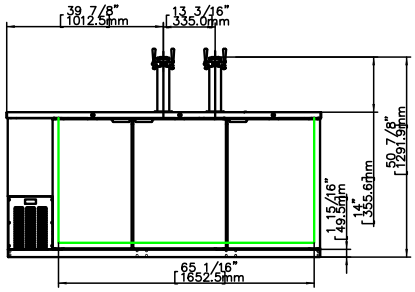


ADDC-94 Top

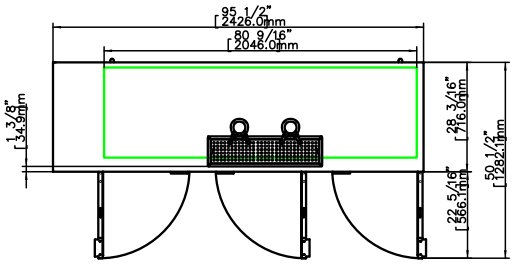


ADDC-94 Front

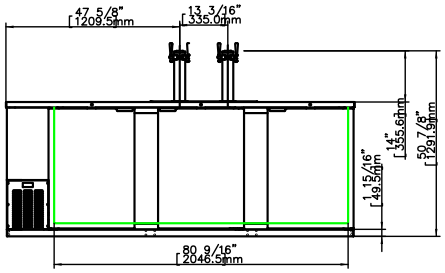

ADDC-23 side view

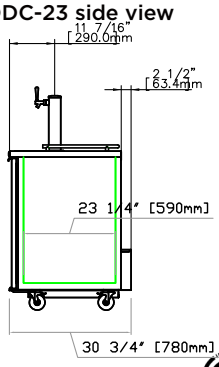

ADDC-58/68/78/94 side view



Specifications

ISO 9001

CONSTRUCTION

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with coved corner stainless steel floor. Interior LED light.
- The entire cabinet has a 1-1/2" Ecomate® CFC-free, polyurethane insulation foamed-in-place.
- Field interchageable doors with 90° stay open feature and locks standard. One piece magnetic gaskets for easy cleaning.
- ADDC-23 single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3"casters.
- Drain is loacted in the back, inside compressor housing.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environtmentally-friendly and CFC-free refrigerant. R-134a holding temperature at 33°F to 38°F refrigerators.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for esay cleaning and maintenance.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Analog thermostat.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON


asber


Sushi & Tapas
DISPLAY CASES


- ☐ ACTC-55
- ☐ ACTC-69
- ☐ ACTC-55-SL
- ☐ ACTC-69-SL


STANDARD FEATURES

- **STYLISH INNOVATIVE DESIGN**
  On high quality materials enhances any store application and optimizes product display.
- **STAINLESS STEEL**
  Stainless Steel construction with plastic ends and anodized aluminum profile provides durability and ease of cleaning.
- **ANGLED DOWN TOP GLASS FRONT**
  Elegantly curved with interior LED light, on non-SL models.
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system.
  CFC free R-134a refrigerators maintain temperature from 36°F to 46°F for the best in food preservation.
- **SUSHI CASES**
  Include refrigeration on top and bottom of food pans.
- **TAPAS CASES**
  Include refrigeration on bottom of food pans only.
- **RIGHT SIDE MOUNT COMPRESSOR**
  Allows easy service without being moved.
- **THERMOSTAT TEMPERATURE CONTROL**
  With indicator thermometer for enhanced performance.
- **TEMPERED SIDE GLASS SLIDING DOOR AT CHEF SIDE.**
- **LARGE INTERIOR, UP TO 11.5" PLATE FOR DISPLAY**
  Interior grate can be turned upside down to increase overall internal height and cooling capacity.
- **1/3 GASTRONORM TRAYS**
  1.5" Deep are included in Tapas Cases.
- **DRAIN INCLUDED**
  Located underneath pans to keep unit clean.

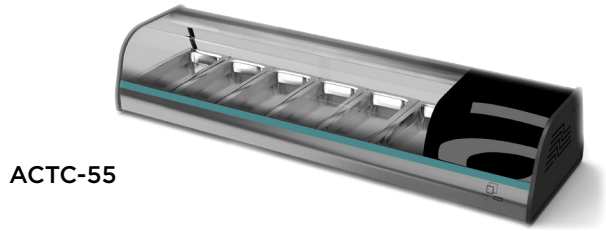
ACTC-55

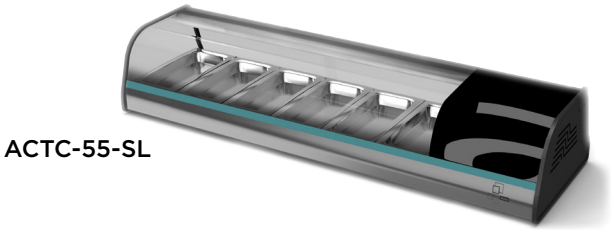
ACTC-55-SL

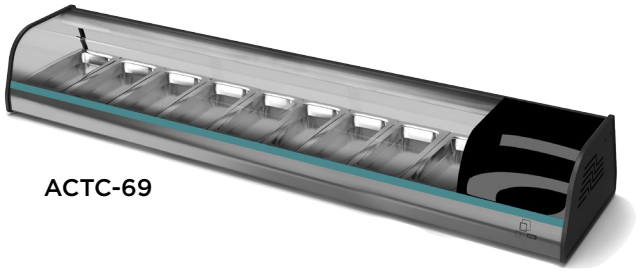
ACTC-69

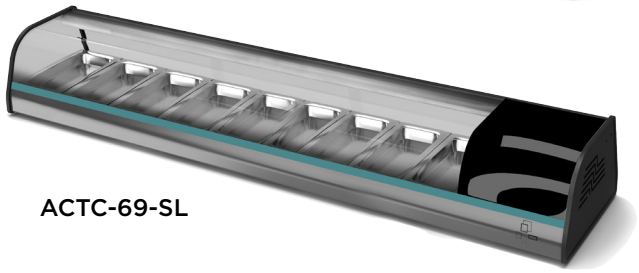
ACTC-69-SL

OPTIONS & ACCESSORIES

220 volts/50cycles/1 phase

ISO 9001

MODEL	PANS	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D	H	SHIPPING WT.	CUBES
TAPAS CASE											
ACTC-55	6	4.2	1/5	115/60/1	5-15P	8'	54 3/8"	15 3/4"	9 5/8"	119	7.2
ACTC-69	8	4.2	1/5	115/60/1	5-15P	8'	68 3/8"	15 3/4"	9 5/8"	135	10.5
SUSHI CASE											
ACTC-55-SL	-	4.2	1/5	115/60/1	5-15P	8'	54 3/8"	15 3/4"	9 5/8"	125	7.2
ACTC-69-SL	-	4.2	1/5	115/60/1	5-15P	8'	68 3/8"	15 3/4"	9 5/8"	151	10.5

* Refrigerated display case. Not for overnight storage.*

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber


HUMANITY AT WORK MONDRAGON

asber


PLAN VIEW

Sushi & Tapas DISPLAY CASES


ACTC-55 (SL) Top

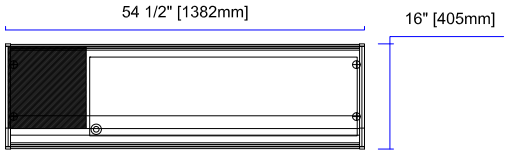


ACTC-69 (SL) Top Front

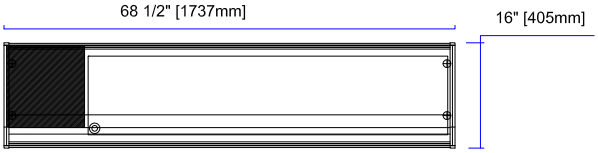


ACTC-55 (SL) Front



ACTC-69 (SL) Front



ACTC (SL)-Common View



Specifications

ISO 9001

CONSTRUCTION

- Heavy duty stainless steel construction with plastic ends and anodized aluminum profile.
- Stylish curved frontal glass with sliding glass service door on chef side.

TRAYS & LIGHTS

- Standard with 1/3rd gastronorm pans, 1.5" deep
- Protected internal LED light, only in non-SL models.
- Drain located in each unit, below pans.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system, holds temperature at 36°F to 46°F.
- Self-contained capillary tube system using environmentally friendly and CFC-free refrigerant (R-134A).
- Static refrigeration below the pans. SL models have a large evaporator coil on top and a static refrigeration cold plate on bottom.
- Evaporator coil is mounted on the left side of the unit. Automatic condensate evaporator, no drain conection required.
- Evaporator condensate is plumbed to a condensate pan located in the compressor housing.
- Simple plug-in installation, no plumbing nesessary.
- Thermostat temperature control with indicator thermometer.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

COOKING

Asber Cooking Equipment offers a range of solutions where design, form and function fit for the most demanding kitchens at an affordable price.

CONSTRUCTION

All our units feature thick gauge stainless steel interior, exterior, front and sides. A fully welded frame stands for strength and durability.

DESIGN

Asber modern sleek design cares for details while offering more functionality. With modular customization in mind our cooking equipment can be combined at your convenience. Fully ergonomic edges and adjustable legs for safety and easy counter top use.

PERFORMANCE

Our cooking equipment comply with high quality standards. Up to 30,000 BTU/Hr , each burner come with a stainless steel standing pilot for instant ignition. Pilot shield adds protection and ease of cleaning. Simple operation control ensures better performance for busy kitchens.



- Hot Plates
- Broilers
- Griddles
- Ranges with Oven
- Fryers
- Stock Pot Stoves
- Salamanders
- Cheesemelters

COOKING WARRANTY

Asber warrants its new product(s) to be free from defects in material and workmanship for a period of one (1) year from the original date of installation not to exceed 15 months from date of shipment from our factory. Equipment sold and installed for residential use, or outside the continental US is excluded from this warranty. Fryers: One (1) year parts and labor. Limited warranty on the stainless steel fry tank: five (5) years, prorated.

This warranty is limited to product(s) sold to the original commercial user. The liability of Asber is limited to, at Asber's option, the repair or replacement of any part (ground shipping only) found by Asber to be warranted herein. Asber shall bear the normal labor charges for repair of replacement to the extent that such repair or replacement is performed within (2) two hours or up to 100 miles total of the office of an authorized service agency, within the continental US and during regular (straight time) hours. Travel outside of the (2) two hours or 100 miles, and any work performed at overtime or weekend rates would be the responsibility of the owner/user. Defective parts must be returned to Asber, freight pre-paid, for Warranty inspection.

Asber assumes no responsibility for any product not installed properly in accordance with the instructions supplied with the equipment by an authorized representative. Any equipment which has been modified by unauthorized personnel or changed from its original design is not covered under this warranty. Furthermore, Asber assumes no obligation for any product which has been subject to misuse, abuse or hard chemicals. Normal maintenance as outlined in the instructions is the responsibility of the owner-user and is not a part of this warranty. Normal parts wear and maintenance is also not covered by this warranty. This warranty is in lieu of any other agreement, expressed or implied, and constitutes the only warranty of Asber with respect to the product.
This states the exclusive remedy against Asber relating to the product(s) whether in contract or in tort or under any other legal, theory, and whether arising out of warranties, representations, instruction, installation or defects' from any cause.

Asber shall not be liable whether in contract or in tort or under any other legal theory for loss of revenue or profit, or for any substitute use or performance or for incidental, indirect, special or consequential damages, or for any other loss or cost of similar type.

Proper installation, initial check out, air shutter adjustments, or normal maintenance such as lubrication, adjustment or calibration of controls is the responsibility of the dealer, owner-user or installing contractor and is not covered by this warranty.

Parts warranty cover – Asber warrants all new machine parts produced authorized by Asber to be free from defects in material and workmanship for a period of 90 days from the Warranty Commencement Date. If any defect in material and workmanship is found to exist within the warranty period Asber will replace the defective part without charge. Defective parts become the property of Asber.

Warranty Exclusions

- Negligence or Acts of God.
- Thermostat calibrations after (30) thirty days from equipment installation due.
- Air and Gas adjustments.
- Adjustments to burner flames and cleaning of pilot burners.
- Failures caused by erratic voltages or gas supplies.
- Unauthorized repair by anyone other than an ASBER Authorized Service Center.
- Damage in shipment.
- Alteration, misuse or improper installation.
- If serial number has been removed or altered.
- Thermostats and safety valves with broken capillary tubes.
- Ordinary wear and tear.

AEHP Hotplates


MODELS ☐ AEHP-2-12 ☐ AEHP-4-24 ☐ AEHP-6-36

AEHP HOTPLATES

Quality ★ Performance ★ Service

Available with 2, 4 or 6 burners to fit every operation, the Asber AEHP Hotplates are built for durability and engineered with safety in mind. Ensure fast cooking for any busy kitchen. Full-size power combines with table-top flexibility, excellent space-saving solution.

In addition to its stainless steel interior and exterior construction, the AEHP series has a powerful capacity of 30,000 BTU per open top burner. With modular customization in mind the hotplates feature a sleek modern design, form and function fit for the most demanding kitchens at an affordable price.

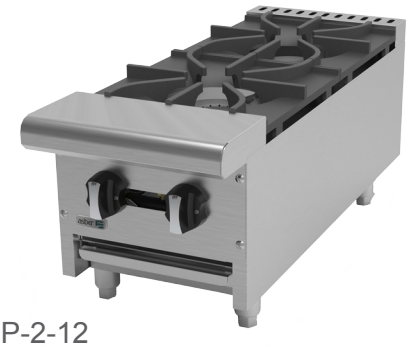


AEHP-2-12



AEHP-6-36





STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge and control valves.
- Heavy gauge welded front frame.
- Adjustable 2” leg.
- Heavy duty 12”x 12” cast iron top grates, removable for easy cleaning.
- Compact design for counter top use.
- NG models include transformation kit for LPG.
- One stainless steel non-clog standing pilot for each burner for instant ignition.
- Pilot shield protects pilot from spills and grease.
- Lift-off and separate top piece cast iron burners rated at 30,000 BTU/hr.
- Sanitary with rounded edges.
- Full width removable stainless steel bottom tray for easy cleaning.

OPTIONS & ACCESSORIES

- Specify gas and elevation if over 2,000ft. (610m).
- 4” adjustable leg.

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AEHP Hotplates

Restaurant Series


INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of installation.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ National-Fire Protection Association, www.NFPA.org
4. CLEARANCE: 6” rear & sides for combustible.
   0” rear & sides for non-combustible.

NOTE:

Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.

AEHP-2-12 AEHP-4-24 AEHP-6-36

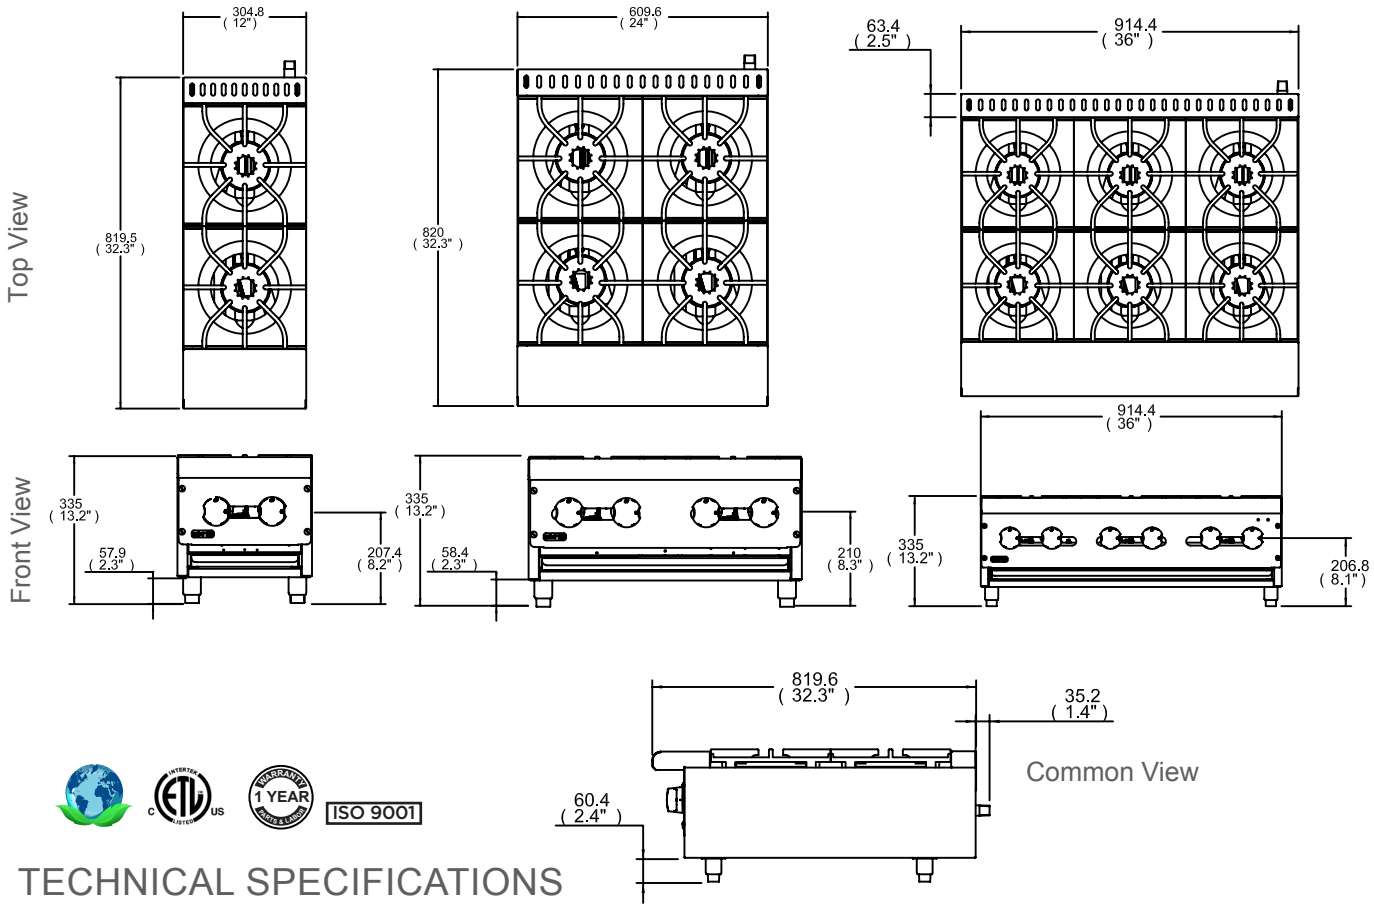

Common View

ISO 9001

TECHNICAL SPECIFICATIONS

MODEL	No. BURNERS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AEHP-2-12	2	30,000	60,000	12”	32 1/3”	13 1/4”	107	6
AEHP-4-24	4	30,000	120,000	24”	32 1/3”	13 1/4”	164	11
AEHP-6-36	6	30,000	180,000	36”	32 1/3”	13 1/4”	209	15

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AECRB Char Rock Broilers

MODELS ☐ AECRB-24 ☐ AECRB-48 ☐ AECRB-36

AECRB CHAR ROCK BROILERS

Quality ★ Performance ★ Service

Volcanic char rocks provide the authenticity and flavors of char broiling. The juices from the meat drip down, causing the rocks to smoke and flame up enhancing the flavor. The Asber AECRB Restaurant Series are built for durability and engineered with safety in mind.

In addition to its all-stainless steel interior and exterior construction, the AECRB series has a powerfull capacity of 16,000 BTU per each “flute” burner. With modular customization in mind, the char rock broilers feature a sleek modern design, form and function fit for the most demanding kitchens at an affordable price.







AECRB-24



AECRB-36

STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge, and valve controls.
- Heavy gauge welded front frame.
- Stainless steel splash guard GA 14.
- Individually controlled steel “flute” burners at 16,000 BTU each, spaced every 6”, designed to provide large cooking coverage or operate only the burners needed, while saving energy.
- One stainless steel standing pilot for each burner for instant ignition.
- Optimum heat distribution with heavy duty angled radiants.
- Heavy duty reversible and removable cast iron 3”x 21” top grates for easy cleaning.
- One side of grate can be used for meat the other for fish.
- Cast in grease trough allows excess fat to flow, minimizing excessive flair up.
- Adjustable 2” leg.
- Compact design for countertop use.

OPTIONS & ACCESSORIES

- Adjustable 4” leg.
- Specify gas and elevation if over 2,000ft. (610m.).

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AECRB Char Rock Broilers

Restaurant Series

INSTALATION REQUIREMENTS


1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ National-Fire Protection Association, www.NFPA.org
4. CLEARANCE: 3” rear, 0” sides, 4” bottom for combustible.

NOTE:


Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.


AERCB 24 | AECRB 36 | AECRB 48

Top View

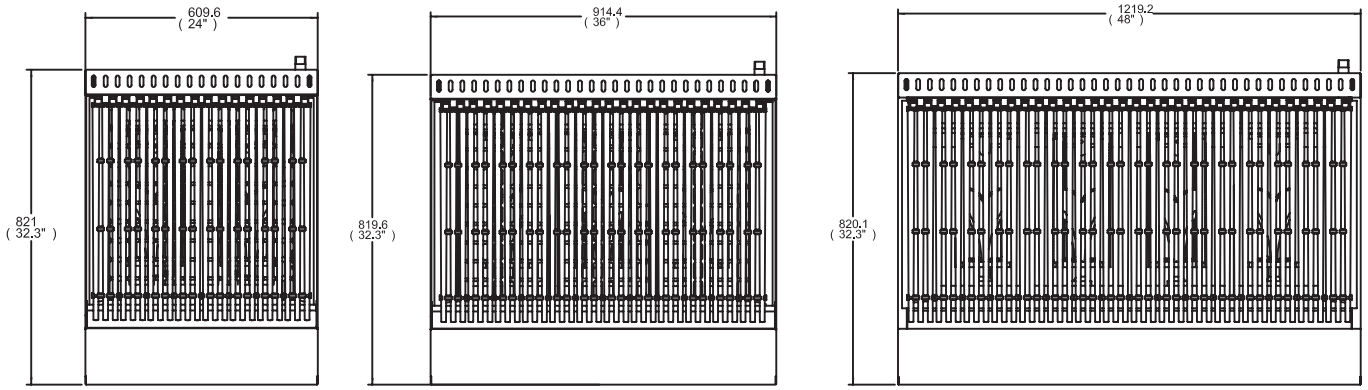

Front View

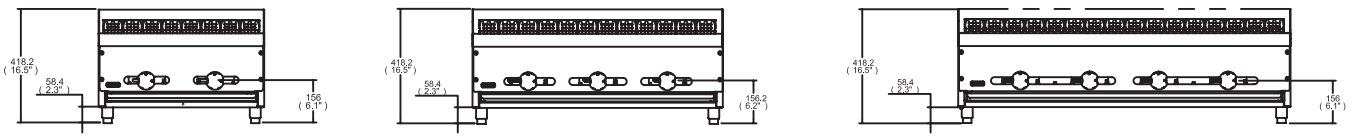

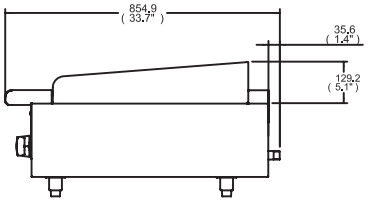

Common Side View

ISO 9001

TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH	-DEPTH	-HEIGHT	SHIPPING LBS	CU.FT
AECRB-24	4	16,000	64,000	24”	33 2/3”	16 1/2”	191	12
AECRB-36	6	16,000	96,000	36”	33 2/3”	16 1/2”	266	17
AECRB-48	8	16,000	128,000	48”	33 2/3”	16 1/2”	340	22

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AERB Radiant Broilers

MODELS

- ☐ AERB-12
- ☐ AERB-24
- ☐ AERB-36
- ☐ AERB-48

AERB RADIANT BROILERS

Quality ★ Performance ★ Service

Radiant broilers allow juices from the meat to drip down onto the radiants, resulting in searing flames and smoke that enhances the flavor. The Asber AERB Restaurant Series are built for durability and engineered with safety in mind.

In addition to its stainless steel interior and exterior construction, the AERB series has a powerfull capacity of 16,000 BTU per each “flute” burner with an exception for the AERB-12 which has 23,000 BTU per burner. With modular customization in mind, the radiant broilers feature a sleek modern design, form and function fit for the most demanding kitchens at an affordable price.







AERB-36



AERB-48

STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge, and valve controls.
- Heavy gauge welded front frame.
- Stainless steel splash guard 14 guage.
- Individually controlled steel “flute” burners at 16,000 BTU each, spaced every 6”, designed to provide large cooking coverage or operate only the burners needed, while saving energy.
- One stainless steel standing pilot for each burner for instant ignition.
- Optimum heat distribution with heavy duty angled radiants.
- Heavy duty reversible and removable cast iron 3”x 21” top grates for easy cleaning.
- One side of grate can be used for meat the other for fish.
- Cast in grease through allows excess fat to flow, minimizing excessive flair up.
- Adjustable 2” leg.
- Compact design for countertop use.

OPTIONS & ACCESSORIES

- Adjustable 4” leg.
- Specify gas and elevation if over 2,000ft. (610m).

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AERB Radiant Broilers

Restaurant Series


INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ National-Fire Protection Association, www.NFPA.org
4. CLEARANCE: 3” rear, 0” sides, 4” bottom for combustible.


NOTE:

Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.

AERB 12 AERB 24 AERB 36 AERB 48

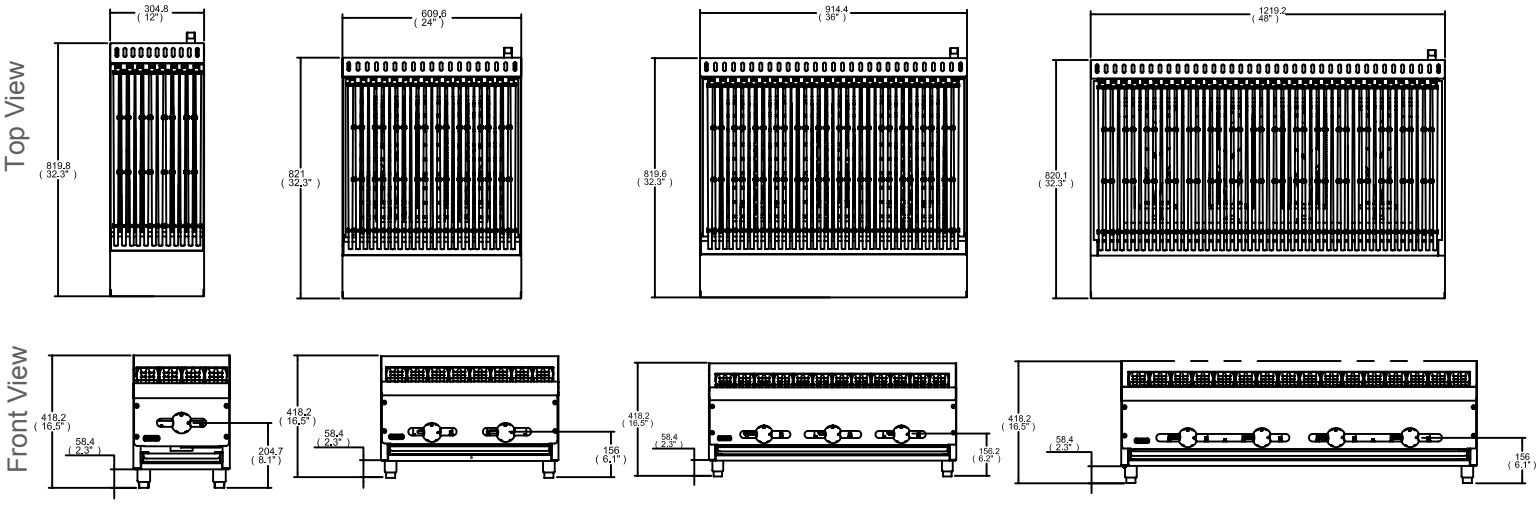

ISO 9001

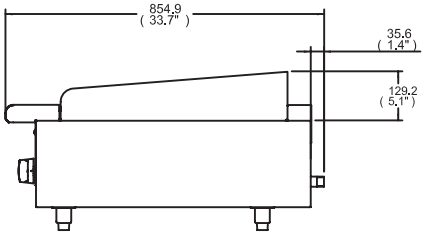

Common Side View

TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AERB-12	1	23,000	23,000	12”	33 2/3”	16 1/2”	118	6
AERB-24	4	16,000	64,000	24”	33 2/3”	16 1/2”	191	12
AERB-36	6	16,000	96,000	36”	33 2/3”	16 1/2”	266	17
AERB-48	8	16,000	128,000	48”	33 2/3”	16 1/2”	340	22

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AEMG Griddles

MODELS
- ☐ AEMG-12
- ☐ AEMG-24
- ☐ AEMG-36
- ☐ AEMG-24H
- ☐ AEMG-36H
- ☐ AEMG-48H

AEMG GRIDDLES

Quality ★ Performance ★ Service

Available from 12” wide to 48” wide to fit every operation, the Asber AEMG Restaurant Series are built for durability and engineered with safety in mind.

In addition to its stainless steel interior and exterior construction, the AEMG series has a powerfull capacity of 24,000 BTU per each “U” burner. With modular customization in mind the griddle features a sleek modern design, form and function fit for the most demanding kitchens at an affordable price.




AEMG-24H



AEMG-48H





STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge and control panel.
- Heavy gauge welded front frame.
- Stainless steel splash guard 14 guage.
- “U” Shaped burners rated at 24,000 BTU/ Hr. Located every 12” for even heat distrubution on griddle surface.
- Adjustable 2” leg.
- One stainless steel standing pilot for each flute for instant ignition.
- Aeration baffles between “U” shaped burners provide uniform surface temperature.
- Highly polished steel griddle plates is 3/4” thick, “H” models only and 5/8” rest of models.
- Compact design for counter top use.
- 4” Wide grease trough for easy cleaning.

OPTIONS & ACCESSORIES

- Specify gas and elevation if over 2,000ft. (610m).
- 4” adjustable leg..

WARRANTY

Continental USA & Canada:
- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AEMG Griddles


Restaurant Series

INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ National-Fire Protection Association, www.NFPA.org
4. CLEARANCE: 3” rear, 0” sides, 4” bottom for combustible.

NOTE:

Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.

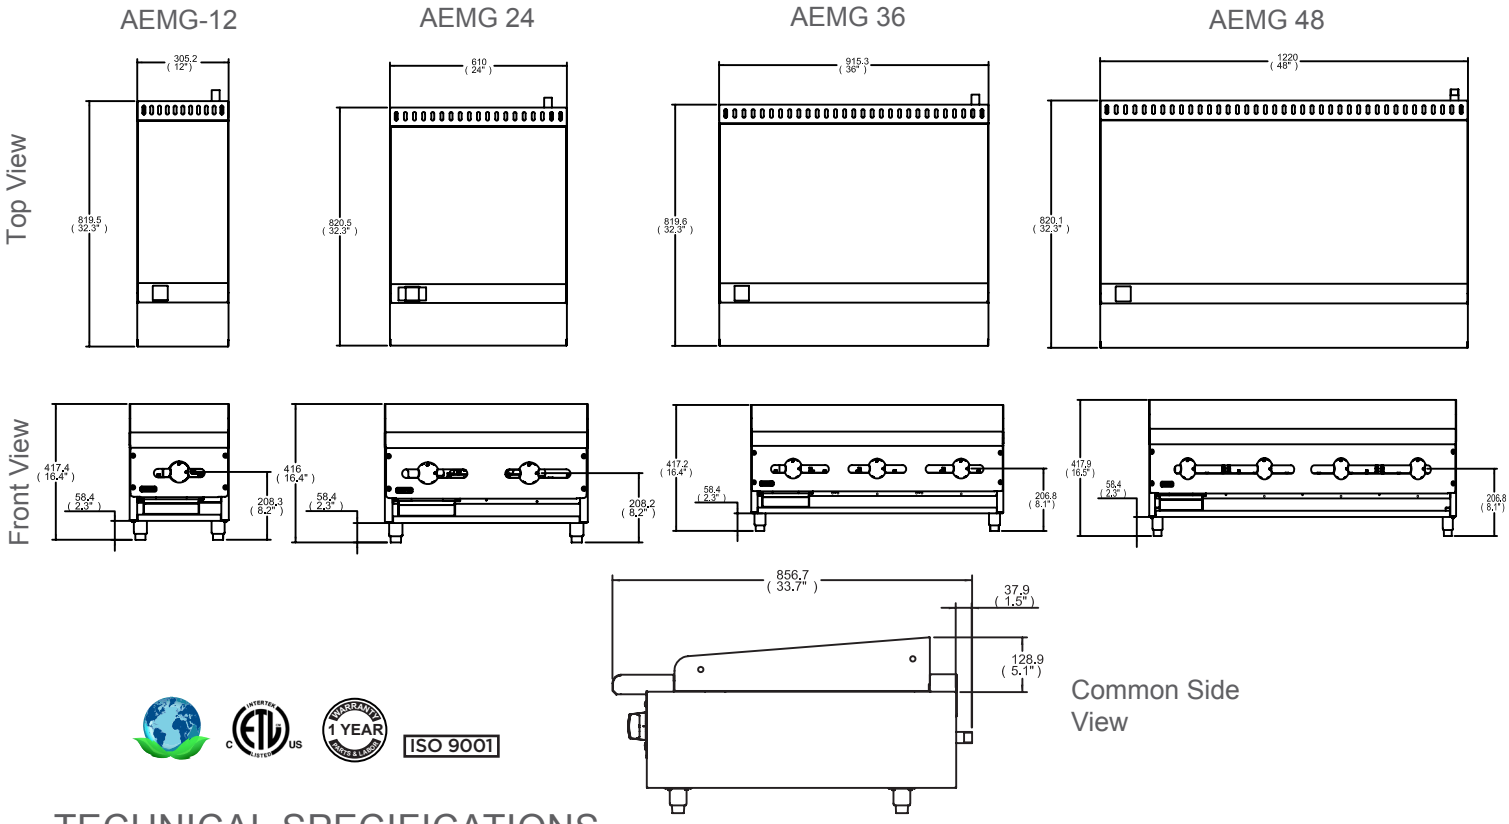

Common Side View

ISO 9001

TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AEMG-12	1	24,000	24,000	12”	33 2/3”	16 2/5”	120	6
AEMG-24	2	24,000	48,000	24”	33 2/3”	16 2/5”	161	11
AEMG-24H	2	24,000	48,000	24”	33 2/3”	16 2/5”	186	11
AEMG-36	3	24,000	72,000	36”	33 2/3”	16 2/5”	218	16
AEMG-36H	3	24,000	72,000	36”	33 2/3”	16 2/5”	214	16
AEMG-48H	4	24,000	96,000	48”	33 2/3”	16 2/5”	348	21

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AETG Griddles

MODELS
- ☐ AETG-24H
- ☐ AETG-36H
- ☐ AETG-48H

AETG GRIDDLES

Quality ★ Performance ★ Service

Available from 12” wide to 48” wide to fit every operation, the Asber AETG Restaurant Series are built for durability and engineered with safety in mind.

In addition to its stainless steel interior and exterior construction, the AETG series has a powerfull capacity of 24,000 BTU per each “U” burner. With modular customization in mind the griddle features a sleek modern design, form and function fit for the most demanding kitchens at an affordable price.




AETG-24H



AETG-36H





STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge and control panel.
- Heavy gauge welded front frame.
- Stainless steel splash guard 14 guage.
- “U” Shaped burners rated at 24,000 BTU/ Hr. Located every 12” for even heat distrubution on griddle surface.
- Adjustable 2” leg.
- One stainless steel standing pilot for each flute for instant ignition.
- Aeration baffles between “U” shaped burners provide uniform surface temperature.
- Highly polished steel griddle plates is 3/4” thick.
- Compact design for counter top use.
- 4” Wide grease trough for easy cleaning.
- Thermostatic griddle temperature range from 0°F to 450°F.

OPTIONS & ACCESSORIES

- Specify gas and elevation if over 2,000ft. (610m).
- 4” adjustable leg.
- NG models include transformation kit for LPG.

WARRANTY

Continental USA & Canada:
- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AETG Griddles

Restaurant Series


INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ National-Fire Protection Association, www.NFPA.org
4. CLEARANCE: 3” rear, 0” sides, 4” bottom for combustible.


NOTE:

Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.


AETG 24 H

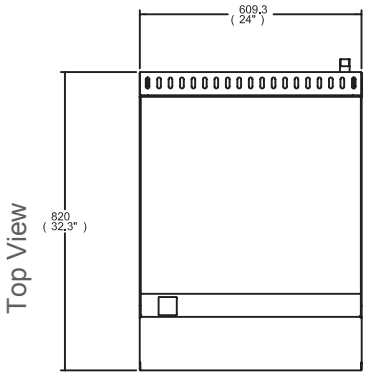

AETG 36 H

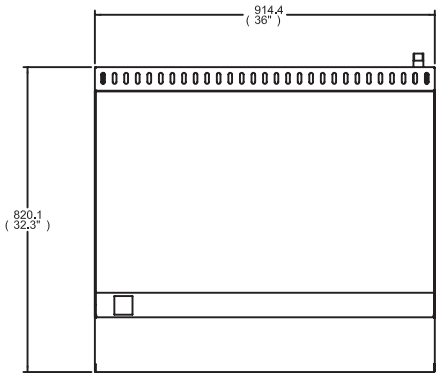



AETG 48 H

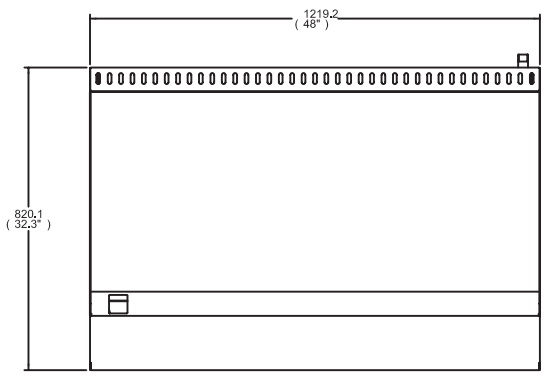



Top View

Front View

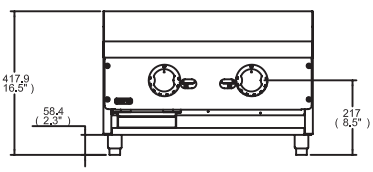

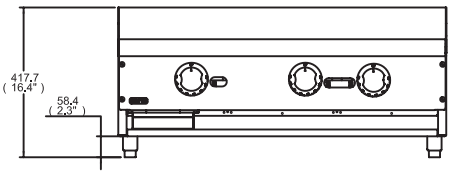

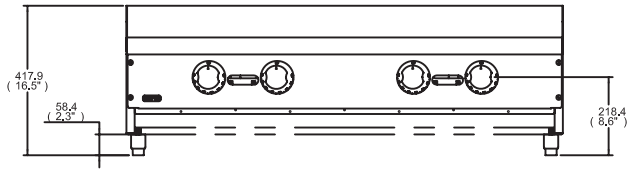

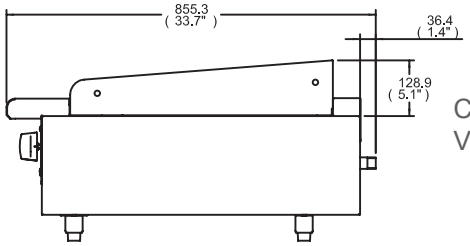

Common Side View

ISO 9001

TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AETG-24H	2	24,000	48,000	24”	33 5/7”	16 1/2”	198	11
AETG-36H	3	24,000	72,000	36”	33 5/7”	16 1/2”	268	16
AETG-48H	4	24,000	96,000	48”	33 5/7”	16 1/2”	353	21

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

24” Ranges W. Oven

MODELS | ☐ AER-4-24 ☐ AER-G24-24H


AER RANGES

Quality ★ Performance ★ Service

Available with 4 open burners, 2-24” griddle and 1 oven to fit every operation, the Asber AER 24” Ranges are built for durability and engineered with safety in mind.

In addition to its all-stainless steel construction, oven floor and door have ceramic finish for higher durability while providing a sleek look. The AER 24” series has a powerfull capacity of 30,000 BTU per burner, 23,000 BTU per griddle and 30,000 total BTU in oven. Thus, form and function fit for the most demanding kitchens.







AER-4-24



AER-G24-24H

STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge, control valves and kick plate.
- Heavy gauge welded front frame.
- 6“ legs with adjustable steel legs.
- Stainless steel high shelf with backguard riser.
- One stainless steel non-clog standing pilot for each burner for instant ignition.
- Optimum heat distribution in oven with heavy duty angled radiants.
- Heavy duty 12”x 12” cast iron top grates, removable for easy cleaning.
- Cast in grease trough allows excess fat to flow, minimizing excessive flair up.
- Heavy duty 3/4” griddle.

OPTIONS & ACCESSORIES

- Specify gas and elevation if over 2,000ft. (610m.).
- NG models include transformation kit for LPG.
- 5” Casters.
- Additional racks for oven
- Extended overshelf for salamander

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

24” Ranges W. Oven

Restaurant Series


INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ NationalFire Protection Association, www.NFPA.org
4. CLEARANCE: 6” rear & sides for combustible.
   0” rear & sides for non-combustible.


NOTE:


Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.

AER-4-24

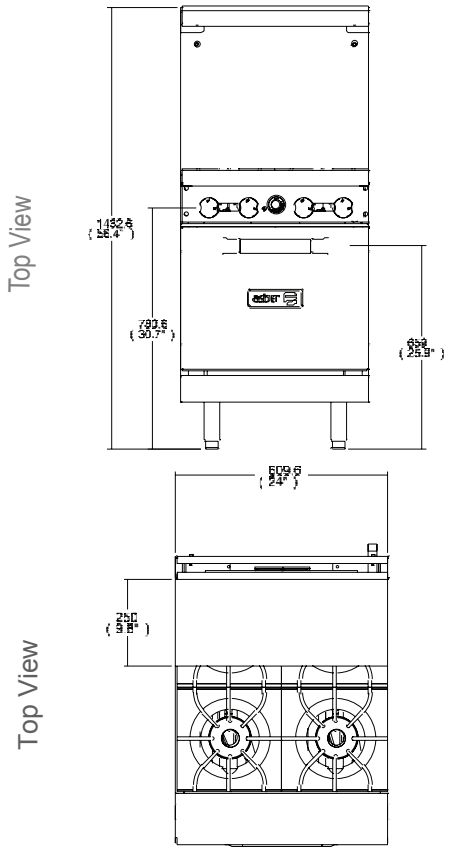

AER-G24-24H

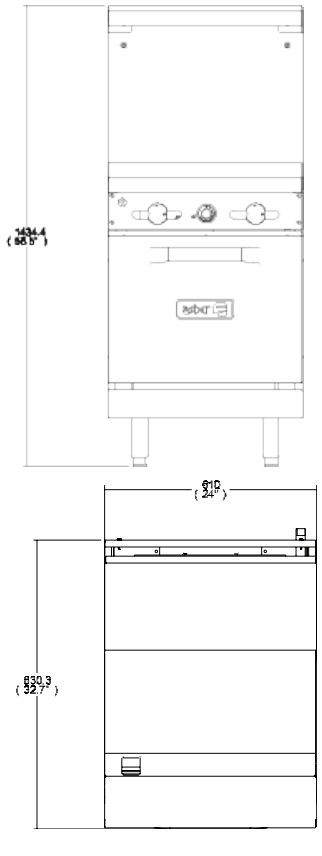

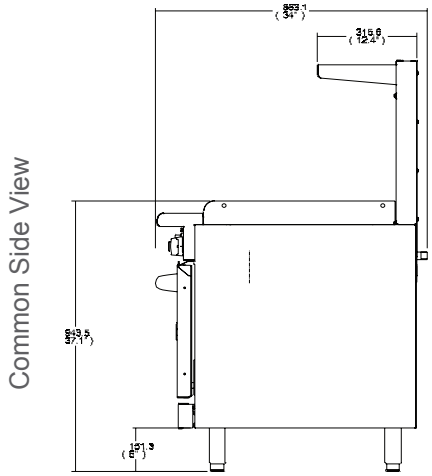

ISO 9001

TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	BTU/ OVEN BURNER(S)	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AER-4-24	4 open + 1 oven	30,000	30,000	150,000	24”	32 3/8”	35”	335	23
AER-G24-24H	2 Griddle + Oven	23,000	30,000	76,000	24”	32 3/8”	37”	335	23

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

36” Ranges W. Oven

MODELS

- ☐ AER-6-36
- ☐ AER-G36-36H
- ☐ AEMR-G12-B4-36
- ☐ AEMR-G24-B2-36H

AE(M)R 36” RANGES

Quality ★ Performance ★ Service

Available with 2 up to 6 burners, 1 up to 3 griddle and 1 oven to fit every operation, the Asber AER/AEMR Ranges are built for durability and engineered with safety in mind.

In addition to its all-stainless steel construction, oven floor and door have ceramic finish for higher durability while providing a sleek look. The AER/AERM 36” series has a powerfull capacity of 30,000 BTU per open, 23,000 BTU per griddle and 30,000 total BTU in oven. Thus, form and function fit for the most demanding kitchens.



AEMR-G12-B4-36



AEMR-G24-B2-36H





STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge, control valves and kick plate.
- Heavy gauge welded front frame.
- 6“ legs with adjustable steel legs.
- Stainless steel high shelf with backguard riser.
- One stainless steel non-clog standing pilot for each burner for instant ignition.
- Optimum heat distribution in oven with heavy duty angled radiants.
- Heavy duty 12”x 12” cast iron top grates, removable for easy cleaning.
- Cast in grease trough allows excess fat to flow, minimizing excessive flair up.
- Heavy duty 3/4” griddle for models (G24&G36) and heavy duty 5/8” griddle for model (G12).

OPTIONS & ACCESSORIES

- Specify gas and elevation if over 2,000ft. (610m.).
- NG models include transformation kit for LPG.
- 5” Casters.
- Additional racks for oven.
- Extended overshelf for salamander.

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

36” Ranges W. Oven

Restaurant Series


INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ NationalFire Protection Association, www.NFPA.org
4. CLEARANCE: 6” rear & sides for combustible.
   0” rear & sides for non-combustible.

NOTE:


Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.

AER-6-36

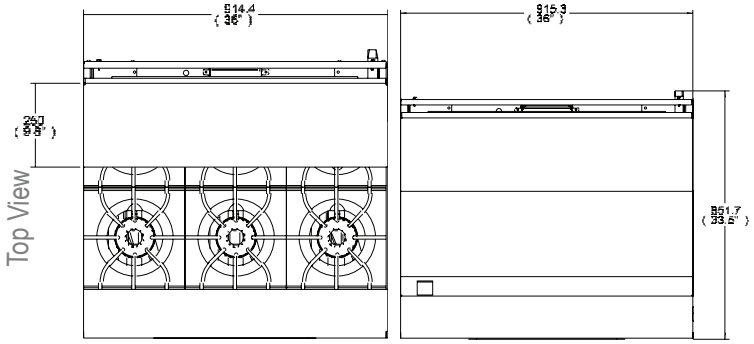



AER-G36-36H


AEMR-G12-B4-36

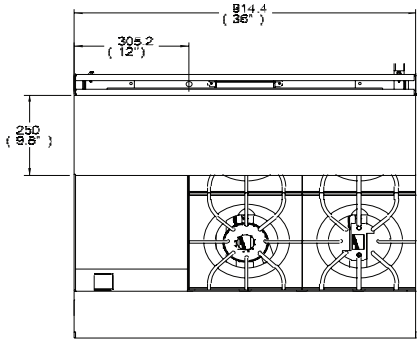

AEMR-G24-B2-36H



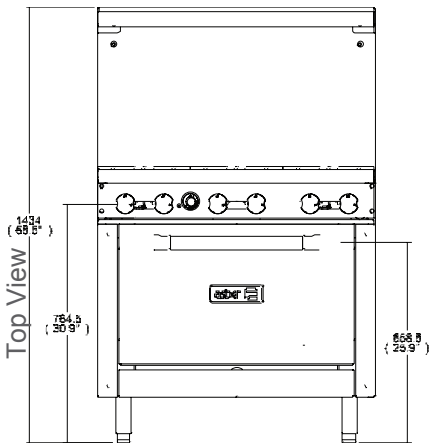

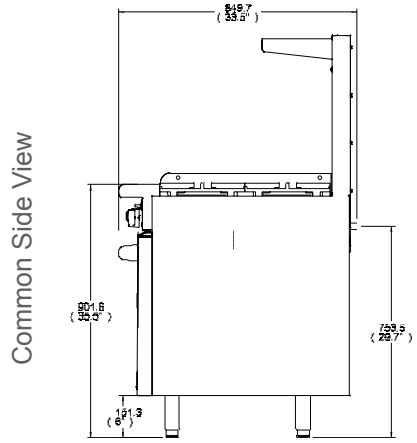

TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	BTU/ OVEN BURNER(S)	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AER-6-36	6 + 1 Oven	30,000	30,000	210,000	36”	32 3/8 “	35”	418	34
AER-G36-36H	3 Griddle + 1 Oven	23,000	30,000	99,000	36”	32 3/8”	37”	418	34
AEMR-G12-B4-36	4 + 1 Griddle + 1 Oven	30,000 / 23,000	30,000	173,000	36”	32 3/8”	37””	428	34
AEMR-G24-B2-36H	2 + 2 Griddle + 1 Oven	30,000 / 23,000	30,000	136,000	36”	32 3/8”	37”	466	34

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

60” Ranges W. Oven

MODELS

- ☐ AER-2-B10-60
- ☐ AEMR-2-G24-B6-60H
- ☐ AEMR-2-G36-B4-60H
- ☐ AEMR-2-RG24-B6-60H

AE(M)R 60” Ranges

Quality ★ Performance ★ Service

Available with 4 up to 10 burners, 2 up to 3 griddle or 2 raised griddle and 2 oven to fit every operation, the Asber AER/ AEMR Ranges are built for durability and engineered with safety in mind.

In addition to its all-stainless steel construction, oven floor and door have ceramic finish for higher durability while providing a sleek look. The AER/AEMR 60” series has a powerfull capacity of 30,000 BTU per burner, 23,000 BTU per griddle and 30,000 total BTU in oven. Thus, form and function fit for the most demanding kitchens.




AER-2-B10-60



AEMR-2-RG24-B6-60H





STANDARD FEATURES

- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge, control valves and kick plate.
- Heavy gauge welded front frame.
- 6“ legs with adjustable steel legs.
- Stainless steel high shelf with backguard riser.
- One stainless steel non-clog standing pilot for each burner for instant ignition.
- Optimum heat distribution in oven with heavy duty angled radiants.
- Heavy duty 12”x 12” cast iron top grates, removable for easy cleaning.
- Cast in grease trough allows excess fat to flow, minimizing excessive flair up.
- Heavy duty 3/4” griddle for models (G24&G36).

OPTIONS & ACCESSORIES

- Specify gas and elevation if over 2,000ft. (610m.).
- NG models include transformation kit for LPG.
- 6” Casters.
- Additional Racks for oven.
- Extended overshelf for salamander.

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

60” Ranges W. Oven

Restaurant Series


INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ NationalFire Protection Association, www.NFPA.org
4. CLEARANCE: 6” rear & sides for combustible.
   0” rear & sides for non-combustible.


NOTE:


Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.


AER-2-B10-60

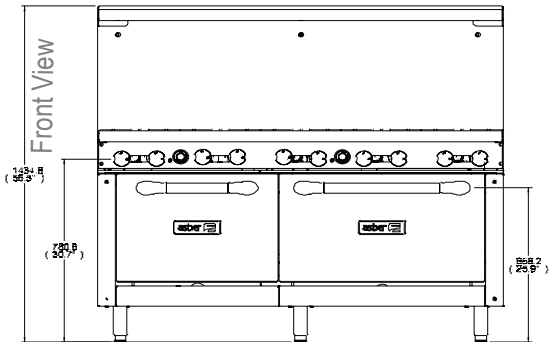



AEMR-2-(R)G24-B6-60H

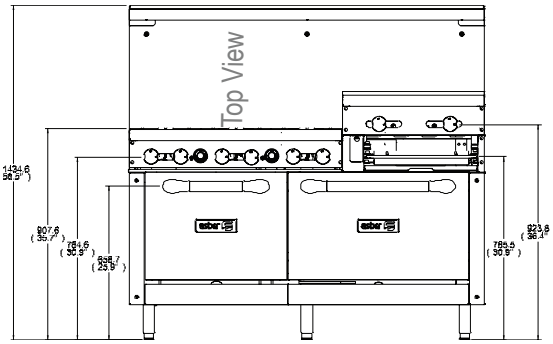

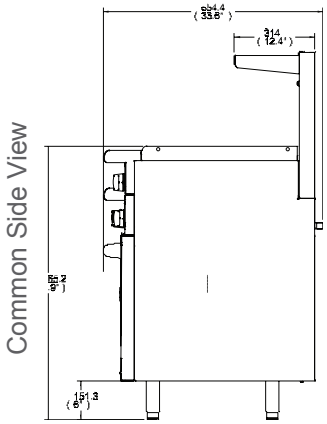

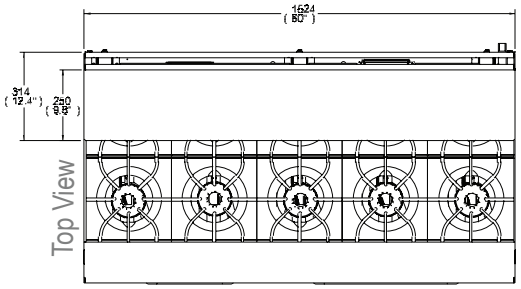

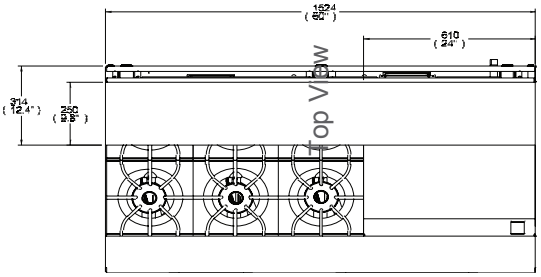

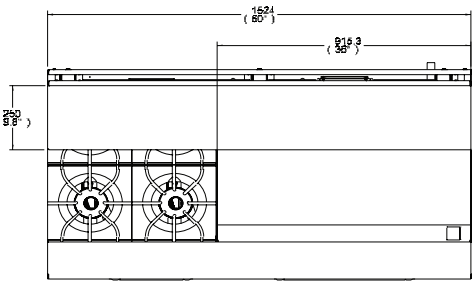

TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	BTU/ OVEN BURNER(S)	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AER-2-B10-60	10 + 2 Oven	30,000	30,000	360,000	60”	32 3/8”	35”	701	54
AEMR-2-G24-B6-60H	6 + 2 Griddle + 2 Oven	30,000 / 23,000	30,000	286,000	60”	32 3/8”	35”	708	54
AEMR-2-G36-B4-60H	4 + 3 Griddle + 2 Oven	30,000 / 23,000	30,000	249,000	60”	32 3/8”	35”	877	54
AEMR-2-RG24-B6-60H	6 + 2 Raised Griddle + 2 Oven	30,000 / 23,000	30,000	286,000	60”	32 3/8”	41”	779	62

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AEF Fryers

MODELS


- ☐ AEF-3540
- ☐ AEF-4050
- ☐ AEF-75
- ☐ AEF-25-25
- ☐ AEF-3540 S-CAS
- ☐ AEF-4050 S-CAS
- ☐ AEF-75 S-CAS
- ☐ AEF-25-25 S-CAS


AEF FRYERS

Quality ★ Performance ★ Service

Asber's 40 & 50 lbs. fryers are built for durability and engineered with safety in mind.

In addition to its all stainless steel interior and exterior construction, the AEF Series has a powerfull capacity of 35,000 BTU per burner, an oil drain valve strategically placed to drain oil faster and an efficient heat transmision for fast start up and recovery among other remarkable features. Form and function fit for the most demanding kitchens.







AEF-4050

STANDARD FEATURES

- Fryer vessel tank: All stainless steel high quality construction, 16 gauge #304 material.
- Durable double layer access floor.
- Exterior is all stainless steel front, door, and basket hanger/flue riser.
- Fryer baskets are twin chrome plated with cool grip plastic coated handles.
- Millivolt control system: No electrical hook up required.
- Drain Valve: 1 1/4" diameter for easy draining of oil.
- Safety Shut Off System which shuts off 100% gas when temperature reaches the hi-limit.
- Large removable crumb screen made of tight mesh chrome plated, located underneath the fry baskets.
- Combination Gas Valve includes pressure regulator and pilot ignition system, hermetically sealed for operating stability. 3/4" NPT has inlet in rear.
- Legs are 6" high, adjustable, and chrome plated.
- -CAS models come with 5" castors. Factory only.
- Thermostatic controls adjust from 200°F to 425°F.

OPTIONS & ACCESSORIES

- Specify gas and elevation if over 2,000ft. (610m).

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.
- Limited warranty on the tank: five (5) years, prorated.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AEF Fryers
Restaurant Series


INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ NationalFire Protection Association, www.NFPA.org
4. CLEARANCE: 6” both sides & rear for combustible
   6” minimum clearance to adjacent open top burners


NOTE:

Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.


AEF-3540 / 4050 Front View




AEF-3540 / 4050 Side View




AEF-3540 / 4050 Front View




AEF-75 S Front View




AEF-75 S Side View




AEF-75 S Front View




AEF-25-25 S Front View



AEF-25-25 S Side View



AEF-25-25 S Front View



TECHNICAL SPECIFICATIONS

MODEL	N° BURNERS	BTU/ BURNER	TOTAL BTU	FRYER CAPACITY	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AEF-3540 S (CAS)	2	38,000	76,000	35-40 Lb	16”	30 7/8”	46”	157	14
AEF-4050 S (CAS)	3	38,000	114,000	40-50 Lb	16”	30 7/8”	46”	157	14
AEF-75 S (CAS)	4	35,000	140,000	65-75 Lb	19 1/2”	31 7/8”	46”	183	17
AEF-25-25 S (CAS)	4	35,000	140,000	75 Lb.	15 1/2”	31”	46”	165	15

*Height does not include 6” legs or 5” castors * Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AESP Stock Pot Stoves

MODELS | ☐ AESP 18 - 2 ☐ AESP 48 - 4

AESP RANGES

Quality ★ Performance ★ Service

Engineered to handle the heaviest loads, the Asber AESP Stock Ranges are built for durability and safety, ensuring fast cooking for any busy kitchen.


In addition to its all-stainless steel construction, the Asber Stock Pot Ranges include heavy duty cast iron burners rated at 90,000 BTU/Hr each providing instant heat. Dual control valves for inner and outer rings allow maximum precision to maintain desired heat. Full width drip tray catches spills and lower cabinet can be used for storage. With modular customization in mind and a sleek ultramodern european design, form and function to fit the most demanding kitchens at an affordable price.



AESP 18









STANDARD FEATURES

- Stainless steel construction: interior and exterior, front, sides, landing ledge, control valves.
- Heavy gauge welded front frame.
- Heavy duty 18” x 21” cast iron top grates, easily re-movable for easy cleaning.
- One stainless steel standing pilot for each burner for instant ignition.
- Legs are 6” high, adjustable, and chrome plated.
- Lift-off top two piece, cast iron burners.
- Pilot shield protects pilot from spills and grease.
- Dual control valves - one for inner ring, the other for outer ring.
- Sloping design of cast iron bowl guides any spill away from the burners ports, protects the flame and prevent-ing clogs.
- Sturdy lower cabinet storage cavity.

OPTIONS & ACCESSORIES

- NG models include transformation kit for LPG.
- Specify gas and elevation if over 2,000ft. (610m).

WARRANTY

Continental USA & Canada:

- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AESP Stock Pot Stoves

Restaurant Series

INSTALATION REQUIREMENTS

1. GAS PRESSURE: 5.0” W.C. for natural gas or 10.0” W.C. for propane gas. A pressure regulator sized for this unit is included, to be installed at time of connection.
2. GAS CONNECTION: Gas line must be 3/4“ or larger, same if flexible connectors are used.
3. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ NationalFire Protection Association, www.NFPA.org
4. CLEARANCE: 4” rear & 12” sides for combustible.
   0” rear & sides for non-combustible.


NOTE:

Due to continued development to ensure best possible performance, these specifications are subject to change without prior notice.

AESP 18


AESP 48


Top View

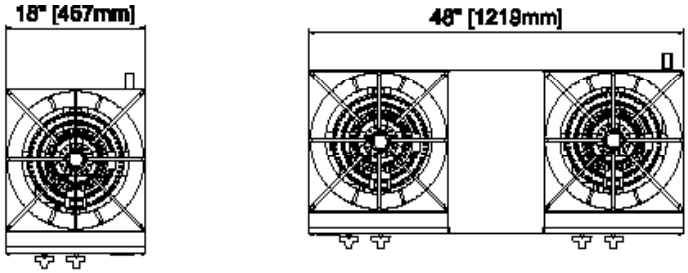

Common side view

Front View

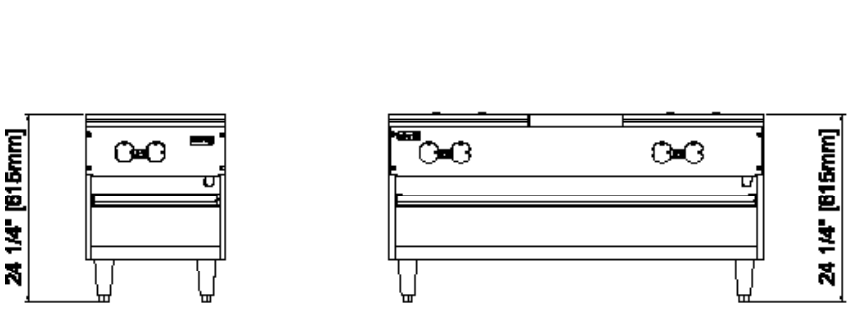



TECHNICAL SPECIFICATIONS

MODEL	BURNERS - RINGS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	SHIPPING CU. FT.
AESP-18-2	1 - 2	45,000	90,000	18”	25 1/8”	24 1/4”	121	7
AESP-48-4	2 - 4	45,000	180,000	48”	25 1/8”	24 1/4”	253	20

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AESB Salamanders

MODELS
- ☐ AESB-24
- ☐ AESB-36

AESB SALAMANDERS

Quality ★ Performance ★ Service


Available with 1 or 2 infrared burners to provide uniform heating and energy efficiency. All stainless steel construction, the Asber AESB salamanders are also reference models for versatility: separated burner controls to fit every operation and save energy, easy vertical adjustment with 3 key positions to suit every food needs and a smooth roller guide system for ease of loading and unloading are some of these features that make them a must in highly demanding kitchens.The AESB series stand for the perfect match between form and function.



AESB-36









STANDARD FEATURES

- Stainless steel construction: front, sides and control panel.
- Heavy gauge welded front frame.
- Infrared burners rated at 20.000 BTU/hr. with independent controls.
- One stainless steel standing pilot for each burner for instant ignition.
- One stainless steel standing pilot for each burner for instant ignition
- Cool touch handle with easy vertical adjustment, multiple positions
- Heavy duty racks on a smooth roller guide mechanism.
- Full size removable crumb tray for easy cleaning.
- Standard with wall mount kit.

OPTIONS & ACCESORIES

- Range mounted.
- NG models include transformation kit for LPG.
- 4” adjustable leg.
- Specify gas and elevation if over 2,000ft (610m)

WARRANTY

Continental USA & Canada:
- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AESB Salamanders

Restaurant Series

INSTALATION REQUIREMENTS

1. GAS PRESSURE: Natural gas 5.0” W.C. Propane gas 10.0” W.C.
   A gas pressure regulator supplied with the unit must be installed
2. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ National Fire Protection Association, www.NFPA.org
3. CLEARANCE: 6” rear & both sides for combustible and 0” for non-combustible constructions. A 4” botton clearance is required for all models and must be Installed with minimun 4” legs.


NOTE:


Due to continuing development to ensure best possible performance, these specifications are subjected to change without prior notice

AESB 24

AESB 36


Top View







AESB 24 & 36

Front View



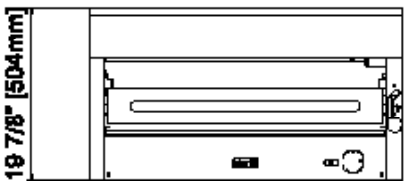

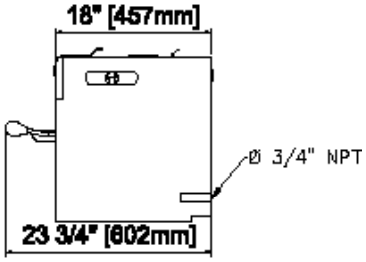

TECHNICAL SPECIFICATIONS

MODEL	N BURNERS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	CU. FT.
AESB-24	1	20.000	20.000	24”	18”	19 3/4”	126	10
AESB-36	2	20.000	40.000	36”	18”	19 7/8”	169	14

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AECM Cheese melters

MODELS
- ☐ AECM 24
- ☐ AECM 36

AECM CHEESE MELTERS

Quality ★ Performance ★ Service

Available with 1 or 2 infrared burners regulated by separated and adjustable valves, the Asber AECM Cheese Melters are built for durability and efficiency. Its heavy dutty chrome rack as well as the all-stainless steel construction provides durability and easy clean at a time, not to mention the full size removable tray. The AECM cheesemelter is designed to excell in the preparation of melted cheese dishes for Mexican and italian specialties. With modular customization in mind in a sleek ultramodern european design, form and function fit for the most demanding kitchens.



AECM 24



AECM 36





STANDARD FEATURES

- Stainless steel construction: front, sides and control panel.
- Heavy gauge welded front frame.
- Infrared burners rated at 20.000 BTU/Hr. with independent controls.
- One stainless steel standing pilot for each burner for instant ignition.
- One stainless steel standing pilot for each burner for instant ignition.
- Heavy duty galvanized racks on tree fixed positions.
- Full size removable crumb tray for easy cleaning.
- Standard with wall mount kit.

OPTIONS & ACCESORIES

- Range mounted
- NG models include transformation kit for LPG.
- Specify gas and elevation if over 2,000ft (610m).
- 4” adjustable leg

WARRANTY

- One year: Labor and parts warranty.
- International: One year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

AECM Cheese melters

Restaurant Series

INSTALATION REQUIREMENTS

1. GAS PRESSURE: Natural gas 5.0” W.C. Propane gas 10.0” W.C. A gas pressure regulator supplied with the unit must be installed
2. VENTILATION: An adequate ventilation system is required for commercial cooking equipment. Request more info @ National Fire Protection Association, www.NFPA.org
3. CLEARANCE: 6” rear & both sides for combustible and 0” for non-combustible constructions. A 4” botton clearance is required for all models and must be Installed with minimun 4” le gs.


NOTE:


Due to continuing development to ensure best possible performance, these specifications are subjected to change without prior notice

AECM 24

AECM 36


Top View




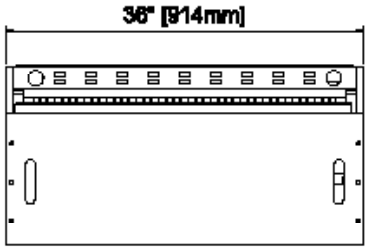


AECM 24 & 36

Front View



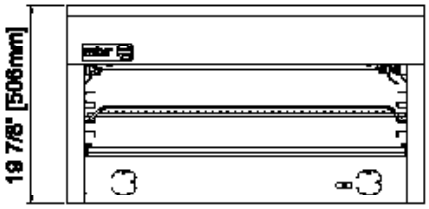

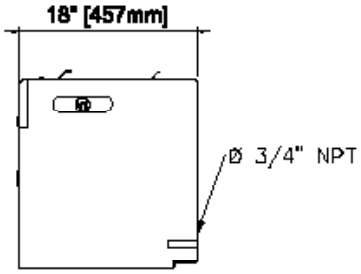

TECHNICAL SPECIFICATIONS

MODEL	N BURNERS	BTU/ BURNER	TOTAL BTU	DIMENSIONS WIDTH - DEPTH - HEIGHT			SHIPPING LBS	CU. FT.
AECM-24	1	20.000	20.000	24”	18”	19 3/4””	102	9
AECM-36	2	20.000	40.000	36”	18”	20”	140	14

* Asber’s specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

TERMS & CONDITIONS

Terms: All orders are subject to credit approval. All Invoices not paid within the specified terms will be subject to a 1.5% per month delinquency charge. Buyer agrees to pay all costs of collection including such attorney's fees as may be allowed by law.

Taxes: This price list does not include any Federal, State, City or Local taxes, which may apply and are subject thereto.

Shipment: Requested carrier will be used upon request. Asber has the right to ship via any responsible carrier if requested carrier is unavailable. Shipping charges are payable by consignee and any claims arising as such charges shall be resolved between the carrier and the consignee. Shipping dates are approximates. Asber is not responsible for any delays in deliveries that are beyond our control.

Damaged Merchandise: Inspect shipment for any damage, before accepting it. If damaged, open and inspect the contents with the carrier. Any damage should be noted and reported on the delivering carrier's receipts. Asber assumes nor responsibility for damages while in transit.

Concealed Damage: If there is concealed damage to the equipment, notify the carrier immediately. Notification should be made verbally as well as in written form. Request an inspection by the shipping company of the damaged equipment. Retain all crating material until inspection has been made.

Cancellations & Returns: Cancelled orders and returned merchandise are subject to a 25% restocking and handling charge. Written authorization is required for a return of any equipment. All equipment returned must be in its original factory crate; freight prepaid and must be in the same condition as originally shipped by Asber Returns will only be authorized within 30 days of invoice date.

Warranty: Register your product with Asber USA to validate you warranty. Service calls must be made directly through Asber service department. 1-(877)-693-3372 or e-mail info@asberusa.com.

*You may register your product online at ;
http//:www.asberusa.com



* Asber's specification are subject to change without notice as we continue to make product improvements.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 786-594-3780

asber

HUMANITY AT WORK MONDRAGON

www.asberusa.com

