



A Division Of The Legacy Companies

## Model BB-2016

Burnisher

Project Name:	
Location:	
Item:	Qty:
Model:	

**SPECIAL PORCELAIN-CERAMIC BURNISHING MEDIA AND CHEMICAL COMPOUND NOW MAKES IT POSSIBLE TO RESTORE LUSTER AND BRIGHTNESS TO STAINLESS-STEEL FLATWARE AND HOLLOW WARE AS WELL AS SILVER.**

### FEATURES . . .

FROM THIS . . .



TO THIS . . .

- Open-top design for easy loading and unloading
- Porcelain-Ceramic Media 1/3 the weight of steel balls
- Light weight permits burnishing of hollow ware
- No peening effect on stainless or silver
- Produces high luster
- Quiet operation
- No external plumbing
- Portable — rolls on casters
- 115-volt, 60-cycle current — grounded cord and plug
- Porcelain-Ceramic balls cannot rust

**In minutes . . .**

**Tableware,**

**both Stainless**

**and**

**Silver Plate**

**are spotless.**

**Also burnishes**

**Aluminum**

**Ware and**

**Pewter . . .**

**Other sizes**

**available for**

**larger items . . .**



### PHYSICAL CHARACTERISTICS

The frame is full-welded 1½" 38 mm × 1½" 38 mm CRS tubing, epoxy primed and painted. Skirt and covers are high strength 125 ABS Plastic. Tub is full-welded 11-ga. 3 mm CRS, epoxy primed and painted, lined with 3/8" 10 mm cast polyurethane lining with molded urethane drain. The motor is 1 HP, 3450 rpm, 115 volts, single phase, 12.0 ampere, class A, constant-duty 104°F 40°C with a 3½" 89 mm × 1/2" 13 mm drive pulley. The recirculating pump is P:AAA (constant), 6 gph 23 l/h. Tank is two-gallon 7.6 liter capacity Stainless-Steel. Eccentric shaft is 1" 25 mm diameter with double spherical roller bearings and a 2¾" 70 mm × ¾" 19 mm drive pulley. The Silver Saver unit operates at a sound level of less than 85 dba. The unit rolls on 4" 100 mm ball-bearing swivel casters with one locking caster.

### BURNISHING MEDIA

Pure porcelain ceramic media will not rust and its weight is one-third that of steel balls. This lighter weight eliminates peening and allows burnishing of hollow ware. The ceramic media lasts the life of the machine with an approximate loss of 5% per year.

- **THE BLAKESLEE SILVER SAVER™ IS THE ONLY BURNISHING UNIT THAT WILL RESTORE LUSTER AND BRIGHTNESS TO STAINLESS-STEEL TABLEWARE AS WELL AS SILVER PLATE.**





A Division Of The Legacy Companies

# Model BB-2016

## Burnisher

### BURNISHING COMPOUND

The burnishing compound used in the Blakeslee Silver Saver provides fast and safe burnishing of stainless steel silver and brass. Detarnish soaking in separate pans is not necessary with the Blakeslee Silver Saver.

Burnishing compound available in case lots containing  
4-1 Gallon 3.8 Liter Bottles

### OPERATING TECHNIQUE

After the compound tank is filled with the proper amount of water and burnishing compound, the Blakeslee Silver Saver is ready for a day's operation without further attention. Flatware should be "dishwashing clean" before placing in Silver Saver. Rewash flatware after burnishing.


### OPERATING TIME AND CAPACITY

The Blakeslee Silver Saver detarnishes and burnishes four gross of mixed flatware in a single operation and restores luster and brightness in less than 10 minutes. Reduces operating costs and provides the best possible flatware maintenance program.

### SHIPPING DATA

SHIPMENT . . . . . 1 Carton (Total 455 Lbs. 206 kg.)  
 MACHINE . . . . . 265 Lbs. 120 kg.  
 MEDIA . . . . . 160 Lbs. 72 kg.  
 COMPOUND  
 2/1-Pint 0.48 Liters Bottles  
 CARTON SIZE:  
 46" 1168 mm H, 33½" 851 mm W, 26" 660 mm L.  
 CUBE: 23.5 ft. 0.665 m<sup>3</sup>.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

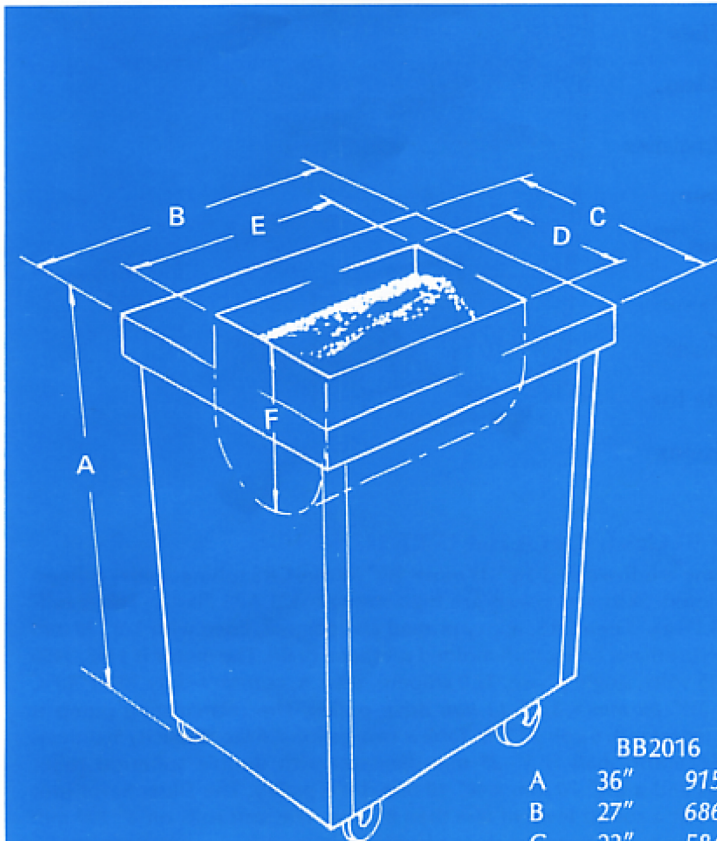

BB2016	
A	36" 915 mm
B	27" 686 mm
C	23" 584 mm
D	15 3/4" 400 mm
E	20" 508 mm
F	16" 406 mm

#### SPECIFICATIONS:

**FRAME:** 1½" 38 mm × 1½" 38 mm CRS Tubing, Full-Welded; epoxy primed and painted

**CASTERS:** 4" 100 mm Ball Bearing Swivel Casters (1) with Brake

**SKIRT AND COVERS:** 125 ABS High Strength Plastic

**TUB:** 3/8" 10 mm Cast Polyurethane lining with molded urethane drain; 11 ga. 3 mm CRS — all seams full-welded; epoxy paint

**MOTOR:** 1 HP 115 volt single phase 12.0 AMP Class A Constant Duty 104°F. 40°C 3450 RPM Drive Pulley 3½" 89 mm × ½" 13 mm.

**COMPOUND TANK:** Stainless-Steel — 2 gallon 7.6 liter.

**COMPOUND PUMP:** P:AAA (Constant) 6 GPH 23 L./H.

**BEARINGS & ECCENTRIC SHAFT:** Shaft 1" 25 mm dia.; Bearings double spherical roller. Drive Pulley 2¼" 70 mm × ¾" 19 mm

**SOUND LEVEL:** Silver Saver Burnishing System operates at less than 85 dba

**WARRANTY:** 1 Year; Defective Material and Workmanship; 3-Year Tub Lining