

BLU CURVE

owners manual

Pure Drinking Water Appliance



contents

- introduction | 3
- safety reminders | 4
- getting to know your Curve | 6
- installation notes | 7
- installation instructions | 8
- operation | 12
- cleaning and maintenance | 14
- troubleshooting | 16
- filters and accessories | 18
- warranty | 19

For product questions
please visit
www.blulogicusa.com
or call us at
888-852-7873


Congratulations and thank you for choosing the Blulogic Curve.

Now you can enjoy your Blulogic Curve, the pure drinking water appliance that replaces all of the bottled water you could ever want.

Your Blulogic Curve is designed to purify and disinfect tap water at the point-of-use by utilizing one of the most advanced filtration processes available. Once the tap water is treated by a multi-stage filter process, it enters the cooling tank and hot water tank. The hot water tank holds water hot enough for coffee or a cup of soup.

All of our Blulogic units include a free multi-stage micron filtration system, an installation kit and this easy to read manual. Your Blulogic Curve is engineered to last for years.

Should you have any questions about your Blulogic Curve, please refer to our website, www.blulogicusa.com or call us at 888-852-7873.

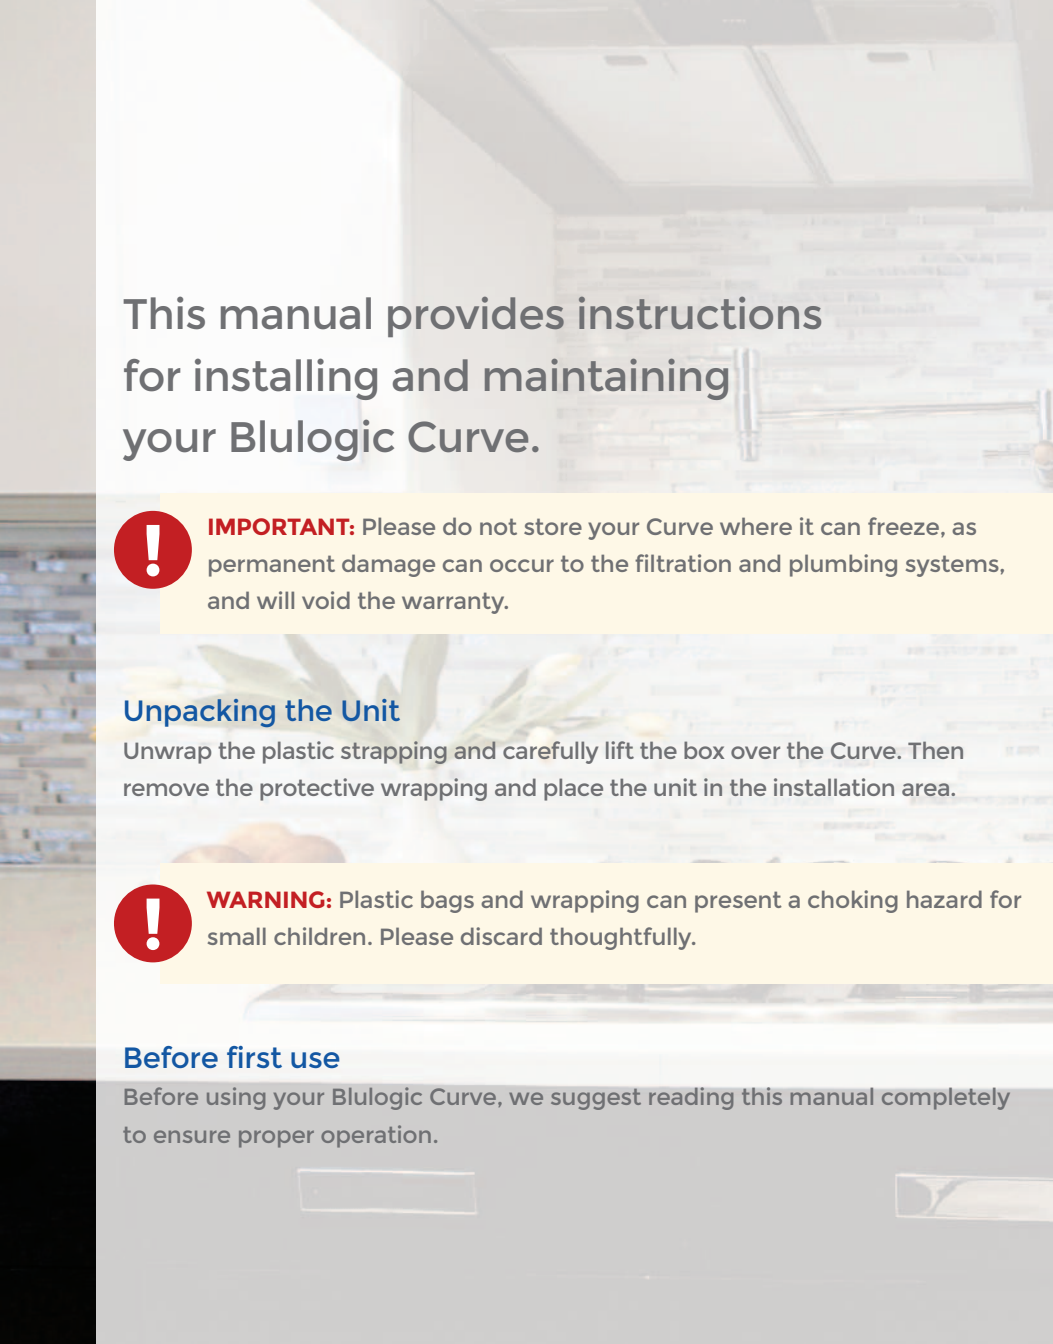

This manual provides instructions for installing and maintaining your Blulogic Curve.



IMPORTANT: Please do not store your Curve where it can freeze, as permanent damage can occur to the filtration and plumbing systems, and will void the warranty.

Unpacking the Unit

Unwrap the plastic strapping and carefully lift the box over the Curve. Then remove the protective wrapping and place the unit in the installation area.



WARNING: Plastic bags and wrapping can present a choking hazard for small children. Please discard thoughtfully.

Before first use

Before using your Blulogic Curve, we suggest reading this manual completely to ensure proper operation.



safety reminders

When using your Curve, take steps to reduce the risk of fire, electric shock, and/or injury by following these safety precautions. **Please read all instructions:**

WARNING: To reduce the risk of fire or electrical shock, only remove the exterior panels when instructed to do so and after unplugging your Curve. Do not attempt to repair the Curve, only authorized personnel should attempt repairs.

- To protect against electric shock, do not place the cord, plug, or Curve in water or other liquids.
- Close supervision is necessary when the Curve is used by or near children.
- Always unplug the Curve from the electrical outlet when not in use and before cleaning.
- Always use caution when removing any parts such as filters, the drip tray, or faucet.
- Use the Curve only in dry locations, away from direct sunlight, in ambient temperatures of 40°F-100°F.
- Do not operate any Curve with a damaged cord or plug, or after the Curve malfunctions, or has been dropped or damaged in any manner. Return the Curve to your authorized Blulogic dealer for examination, repair, and electrical or mechanical adjustment.
- The use of any accessory part not authorized by Blulogic may cause personal injury and/or damage to the Curve.
- Do not let power cords or plumbing tubing hang over the edge of tables or counters, or touch hot surfaces.
- Do not place the Curve on or near a stove or other hot surfaces.
- Do not dispense hot water with the faucet cover removed because scalding may occur.
- Do not clean any parts with anything other than mild



soap and water and a non-abrasive cloth.

- Avoid contact with moving parts.
- Do not place cloth or other materials under or around the Curve.
- Use only Blulogic filters or warranty will be voided.
- A short power supply cord is provided to reduce the risks that result from becoming entangled in or tripping over a longer cord.
- If an extension cord is used, the marked electrical rating of the extension cord must be at least as great as the electrical rating of the Curve. Ensure the extension cord is arranged so that it does not drape over the counter or

tabletop where it can be pulled on or tripped over.

- The power supply cord has a polarized plug (one blade is wider than the other). To reduce the risk of electrical shock, this plug will fit into a polarized, grounded outlet only one way. If the plug does not fit fully into the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not modify the plug in any way.

getting to know your Curve



Included with your Curve:

- 25' Food Grade PVC Tubing
- Self-piercing Saddle Valve
- Shut Off Ball Valve
- Brass connectors and fittings

installation notes



WARNING: Risk of electric shock and damage to interior walls or leak and/or flood if improperly installed. Use the following guidelines to help you ensure quick, easy and proper installation of your Curve.

- Choose a location for your Curve that is away from direct sunlight, excessive heat and/or cold, and wetness.
- Make sure there is at least 3" of space behind the unit to allow for proper fan function.
- Be sure there is an electrical outlet close by that has the correct power voltage.
- DO NOT use tubing with less than a 180 PSI rating.
- DO NOT connect copper tubing to the elbow fitting, shutoff valve, or directly to the Curve. If copper tubing is used it may result in a serious leak. If building code or regulations require copper tubing, contact Blulogic Technical Support for specific instructions and recommendations for adapter fittings.
- Make sure there are no sharp bends or kinks in the tubing. Allow extra tubing to prevent stress on the fittings. Avoid tubing contact with other objects and sharp edges.
- All tubing used in the elbow fitting and shutoff valve must be clean, cut square with a sharp knife or razor, and free of nicks and burrs.
- If you need additional tubing, make sure it is 1/4 inch OD and meets ANSI/NSF and FDA standards for drinking water. DO NOT use tubing of an unknown quality or origin.



installation instructions

Please follow all of the installation steps below. If you have any questions, don't hesitate to contact us at 888-852-7873.



Step 1 | Install the saddle valve at cold water source

To connect the feed water, first shut off the water line under your sink. Then use the supplied self-piercing saddle valve to connect to the cold water supply line under the sink. Attach the 1/4 inch tubing to the compression fitting on the side of the valve. Clamp the saddle valve over the copper or plastic feed line (cold water only). Turn the handle on the valve until the needle stem pierces through the tube. Then retract the needle 1 to 2 turns to start the water flow.



Step 2 | Connect and run the water tubing

Run the 1/4" poly water tubing from the water source to the Curve location. Typically, but not always necessary, a small hole is cut in the back of the cabinet and the wall and the tubing is run through the wall or a drop ceiling to the cooler location.


If this is not possible, take care that the tubing is not exposed or draped or creates a tripping hazard in any way.



Step 3 | Install the optional shut off ball valve

Included in your kit is an optional shut off ball valve. This provides an easy way to turn the water to the cooler off without having to shut off the water under the sink.

The valve should be attached approximately 5 feet from the unit. Simply cut off the last 5 feet of the plastic feed line and attach the valve to reconnect the lines.

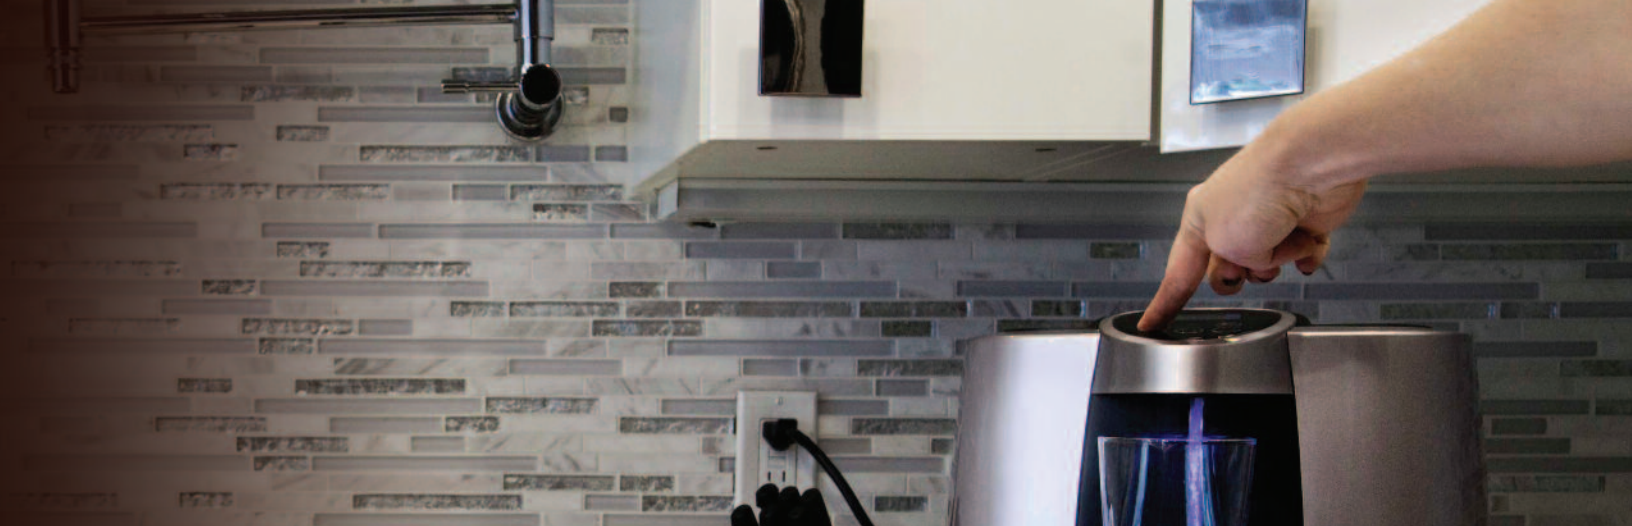

Step 4 | Hook up the water supply

Once the tubing is placed securely, connect one end to the saddle valve and the other end to the water source inlet on the back of the Curve.



Step 4 | Make sure the compressors are off

On the back of the Curve are two switches that turn the heating and cooling compressors on.

Be sure both switches are in the off or "O" position.



Step 5 | Turn on the water source back on

The water will begin to flow through the lines to the cooler.

installation instructions

Please follow all of the installation steps below. If you have any questions, don't hesitate to contact us at 888-852-7873.



Step 6 | Plug in to electricity

Plug the Curve into the closest wall socket. Take care that the cord does not present a tripping hazard.

Once plugged in, the tanks will begin to fill with water. During this time you may hear water flowing inside the Curve. This is normal.



Step 7 | Test water flow

Once the tanks are filled, ensure proper function by placing a cup under the dispenser and pressing the cold water button. Dispense water for at least 60 seconds to ensure there are no air bubbles. If functioning normally, then press the hot water safety lock, and then the hot water button for at least 60 seconds.

Be sure that water flows freely from each operation.



Step 8 | Flush the tanks and filters

For optimum purity, flushing the coolers for approximately 15 minutes - or roughly 3 gallons - is recommended. Simply dispense water into a large receptacle by pressing the cold water button.



Step 9 | Chilling and heating the water tanks

After flushing, turn the hot and cold compressors on by flipping the switches to the on or "I" position.

The chilling and heating indicators on the touch panel will light as chilling and heating is in process. When the indicators go off, water has reached the proper temperature. The tanks will recharge or reheat as needed to ensure proper temperature.

Step 10 | Enjoy!

Enjoy endless amounts of clean, delicious and pure water!

operation

Touch Panel & Function Screen

Your Curve is equipped with an anti-microbial touch-panel featuring LED indicators and a function screen indicating cold and hot power operation, temperatures and settings.

HOT displays the heated water temperature and flashes when the heating unit is in operation. **COLD** displays the chilled water temperature and flashes when chilling is in progress. **UV** indicates when the UV filter is in operation.

F displays the amount of water produced in Liters. **DAY** indicates the number of days the filters have been in use. To reset the **DAY** and **F** counters back to zero, hold the **LOCK** button and the internal switch for 3 seconds. The unit will beep 5 times and then clear the counters.

LIGHTBULB indicates when energy saving is in use. To manually turn energy saving on, press and hold the **LOCK** button while pressing **SET**.

WARN will appear with a code if there are any machine errors.

To adjust water temperatures & settings

To adjust hot water temperature, press **SET** one time to display current temperature. Press **SET** again and hold for 3 seconds to change the temperature. To complete the setting, press **SET** and hold for 3 seconds.

To adjust cold water temperature, press **SET** two times to display current temperature, and then adjust as above.



Dispensing Gap

Your Curve features a large 9 inch dispensing gap with Foldable Cup Rest—truly a new feature. This feature is helpful when filling a small coffee mug to avoid the splashing when the water hits the bottom of the cup. When filling a mug or smaller cup, use the fold down cup holder and be closer to the dispenser.

To dispense chilled or ambient water

Simply press the chilled or ambient water buttons. Release the button to stop dispensing.

To dispense hot water

Your Curve is equipped with an automatic hot water safety lock to ensure small children do not accidentally get scalded. To dispense hot water, first press the **LOCK** button. Then press the hot water button to dispense. The Hot Water Safety Lock will automatically reset after 5 seconds.

Reboil

Use the Reboil function for on-demand 100°C water, ideal for teas and soups. Press the **LOCK** button, then press the **SET** button to activate reboil. A short beep will sound and the hot water display will flash. When reboil begins, it will not stop until the water reaches 100°C. To stop heating, press **LOCK** and then press **SET**.

Button Reset

Your Curve is designed with safety in mind. To guard against accidental overflow, the unit will stop dispensing water if any button is pressed for longer than 40 seconds. To resume flow, release the button and press it again.



cleaning and maintenance

WARNING: To reduce the risk of fire or electrical shock, unplug your Curve and turn off the water supply under the sink before cleaning. Do not attempt to repair the Curve, only authorized personnel should attempt repairs.



Cleaning the exterior of your Curve

Your Curve is designed to be cleaned with mild soap and water only. The drip trays are easily removed and dishwasher safe.

NOTE: DO NOT use chemical or abrasive cleaners because they may cause the finish to scratch or wear away.



Emptying the Drip Collector

Your Curve is equipped with a drip collection tray and fullness sensor at the base of the unit. When full, a FULL will flash on the touch panel and a soft alarm will sound. To empty the drip collector, simply slide the tray out, empty, and then slide the tray back in.

NOTE: If the LED light continues to blink after emptying, the unit senses a possible water leak. Unplug the unit, wipe dry. Then replug.



Draining the tanks

If transporting, storage or descaling is required, the tanks must be drained. First, unplug the unit then shut off the water supply under the sink.

Holding a basin underneath to collect spilling water, unscrew the drain plug and collect the water as it empties.

You may want to place a towel on the floor to catch any stray drips.



When on vacation

If the unit will be going unused for any length of time, you might consider turning the hot and cold power off as well as the water supply. The switches are located on the top back of the unit, and the optional shut off ball valve.

NOTE: If left unattended for more than a couple of days, it is advised to flush the system by dispensing and then disposing of 2-3 glasses of water.



Replacing Filters

To replace the filters, remove the top cover by pressing the Release Button at the back of the unit.

Press the release button at the back of the twin filter pack. The filters can now be slid out.

Twist each filter in a clockwise direction to remove. Install the new filter by twisting counter clockwise.

Reset the day and flow meters by simultaneously pressing the SET button on the panel, and internal set switch for four seconds until a beep is heard.



Replacing the UV Lamp

If the UV lamp experiences a malfunction, UV will display as a warning on the panel.

To replace the UV lamp, remove the top cover by pressing the Release Button at the back of the unit. Then remove the UV lamp cover by pressing the release tab in. Slide the lamp out. Replace the lamp, and then replace the UV lamp cover, and then the top cover.


troubleshooting

WARNING: To reduce the risk of fire or electrical shock, unplug your Curve and turn off the water supply under the sink before removing panels. Only authorized personnel should attempt repairs.



Removing the top cover

To remove the top cover of your Curve, simply press the release button at the back of the unit, marked PUSH.

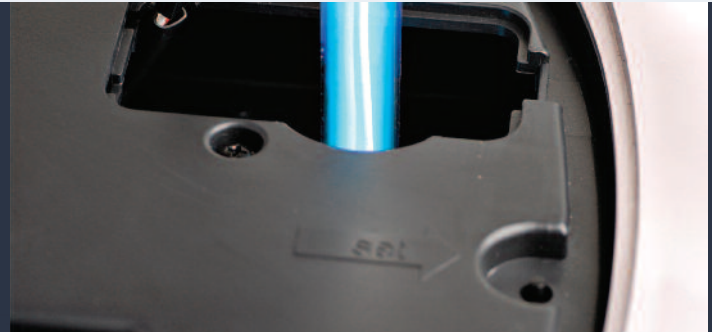

Internal Set button

If, upon testing, you find there is no hot water, it is possible the water heater was turned on before the tank was completely full.

To avoid burnout of the mechanism, the water heater is equipped with a safety off switch. To reset the heater, simply press the internal SET button.

Access the internal SET button by removing the top cover.

Warning and Malfunction Codes

Your Curve is equipped with a WARN indicator that will display a code when an error or malfunction is detected. Below are the more common codes. If you have any questions, don't hesitate to contact us at 888-852-7873.

- C101 Hot water system is turned off. Turn hot water on at back of unit.
- C102 Water flow is off. Ensure water is flowing to unit. If alarm sound persists, reset unit by unplugging and replugging into electricity.
- C103 Heater is not reaching set temperature. Ensure water is flowing to unit. If alarm sound persists, reset unit by unplugging and replugging into electricity.
- C201 Cold water system is turned off. Turn cold water compressor on at back of unit.
- C202 Chiller is not reaching set temperature. Ensure water is flowing to unit. If alarm sound persists, reset unit by unplugging and replugging into electricity.
- C203 Fan is either disconnected or damaged, contact BluLogic for assistance.
- C301 Leak on bottom plate is detected. Disconnect unit from electricity and clear out all water to be found. Make sure there is no water in basin or bottom part of unit.
- C302 Internal leak is detected. Disconnect unit from electricity and call BluLogic for assistance.
- C303 Computer board is self testing, or indicates problem with voltage. Disconnect unit from electricity and call BluLogic for assistance.
- OFF Water flow for more than 40 seconds, or buttons are jammed. Press buttons to ensure they release properly. If not, call BluLogic for assistance.
- FULL Drip collector is full. Drain collector to resume normal status.
- UV UV lamp malfunction.
- F Filters and UV Bulb in need of replacement. Replace as described on page 15.



parts & accessories

Ordering replacement filters

To maintain the highest quality water your Blulogic can provide, your filter should be replaced every 6-8 months or 1200 gallons, whichever comes first. When initially purchasing your Blulogic, grabbing an extra filter replacement saves you time and money.

Filter Specifications and Service Life

- Twin- filter set with Sediment, Carbon and scale-control filters
- UV Lamp

Internal & External Parts

- Stainless steel tanks are more sanitary and durable than plastic tanks, with no possible chance of leaching in the water with stainless steel tanks like there is with plastic tanks.
- 2 year parts warranty and outstanding 3 years on compressor
- Components are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Free Contamination Control Act of 1988.

LIMITED WARRANTY TERMS AND CONDITIONS TWO YEARS ON PARTS, AND THREE YEARS ON COMPRESSOR FROM DATE OF PURCHASE

This warranty is "limited" to any Blulogic cooler installed in non-restricted locations, such as residences or offices. The warranty provides for, at Blulogic's sole discretion, the entire replacement of a cooler deemed to be defective or replacement of just the defective parts of the cooler in question. This limited warranty does not provide for any labor allowances to repair defective water coolers. This limited warranty does not offer coverage for components that are not factory installed such as customer-installed accessories not originally sold by Blulogic.

INSTALLATION AND OPERATION

The foregoing Limited Warranty applies only when the dispenser is installed and operated in accordance with Blulogic's written instructions. It does not apply to dispensers, are found to have been subjected to accident, modifications, abuse, misuse, misapplications, corrosive type atmospheres, or abnormal use. Blulogic warrants the complete water dispenser including hermetically sealed refrigeration system, water system faucets, and electrical components to be free from defects in material under normal use for 2 years from date of shipment, and three years on the compressor. Coverage is limited to replacing a defective cooler with a similar cooler or providing parts to repair or replace any part of the water dispenser which is expressly covered by this Limited Warranty at Blulogic's option. In any case, the value of the Warranty shall not exceed the original purchase price paid for the water dispenser.

OWNER'S OBLIGATIONS

The owner has the obligation and responsibility to diagnose and/or make minor repairs to the cooler to keep it in working order.

BLULOGIC'S OBLIGATIONS

Blulogic's obligation under this Limited Warranty is limited to replacing a defective cooler with a similar cooler or providing parts to repair or replace any part of the water dispenser which is expressly covered by this Limited Warranty, but only if Blulogic determines that the water cooler, or parts in the water cooler, and the purported defect or defects, are covered by this Limited Warranty.

PERSONS ENTITLED TO BENEFIT WARRANTY

This Limited Warranty is applicable only to the first person who purchases the Blulogic cooler. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES. ALL IMPLIED WARRANTIES, ARISING BY LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO THE SAME PERIOD OF TIME AS THIS LIMITED WARRANTY. Some states of the United States do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply.

This Limited Warranty gives specific legal rights, and in some states of the United States there may also be other rights, which vary from state to state. Any questions regarding this Limited Warranty or performance of the Manufacturer's obligations under this Limited Warranty should be addressed to:

Blulogic | 1609 McDonald Ave, Brooklyn, NY 11230



BLU 
BLU LOGIC USA

888-852-7873

blulogicusa.com

