H5E-DV PC 200

Height: 28.4" Width: 7.5" Depth: 17.4" (72.1cm) (19.1cm) (44.2cm)



- Dispenses hot water in three portion sizes
- · Front of machine volume programming
- Precise temperature (60°F-210°F) (15.5°C-98.9°C) ensures consistent, high quality results; adjustable in 1º increments
- Three programmable volume settings and one push and hold continuous dispense button
- All stainless design
- · Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Agency:



Additional Features

Specifications

Product #: 39100.0000 Water Access: Plumbed Finish: Stainless

Faucet: Upper

Temp. Setting: 200°F (93.333°C) Dispense: Portion Control Dispense: Push Button

Electrical & Capacity

| Volts* | Amps | Watts | Cord Attached | Plug Type | 8oz (236m | nL) cups/hr | Phase | # Wires plus Ground | Hertz |
|-------------|------|-------|------------------|-----------|----------------|---------------|--------|------------------------|-------|
| | | | | | 35°F (1.67°C)* | 140°F (60°C)* | Flidse | | |
| 120/208-240 | 16.9 | 4050 | No | - | 59 | 192 | 1 | 3 | 60 |
| 120/208 | 15 | 3054 | - | N/A | 117 | 320 | - | - | - |
| 120/240 | 17 | 4050 | - | N/A | 155 | 427 | - | - | - |

*Temperature of water entering the sy

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


CAD Drawings PSI KLC kPa **Fitting Supplied** Water Flow Required (GPM) **2D** Revit 20-90 138-621 1/4" Male Flare Fitting



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 11/30/2023

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

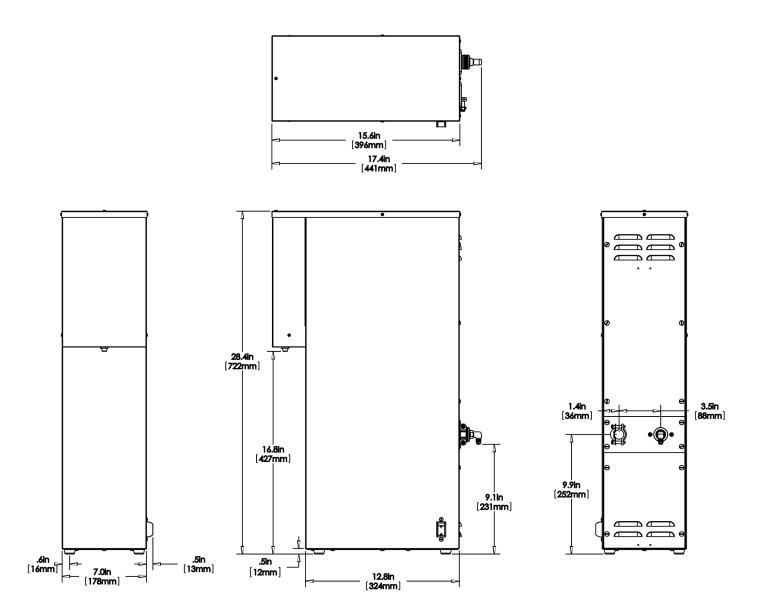

| | | Unit | | Shipping | | | | | |
|---------|----------|---------|----------|----------|----------|----------|------------|-----------------------|--|
| | Height | Width | Depth | Height | Width | Depth | Weight | Volume | |
| English | 28.4 in. | 7.5 in. | 17.4 in. | 32.3 in. | 10.8 in. | 20.4 in. | 32.450 lbs | 4.120 ft ³ | |
| Metric | 72.1 cm | 19.1 cm | 44.2 cm | 82.1 cm | 27.5 cm | 51.8 cm | 14.719 kgs | 0.117 m³ | |



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 11/30/2023

 For most current specifications and other info visit bunn.com.
 11/30/2023

Related Products & Accessories:H5E-DV PC 200(39100.0000)





 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 11/30/2023

 For most current specifications and other info visit bunn.com.
 11/30/2023

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.