BUNN®

ITEM#

PROJECT

DATE

12 Cup Dual-Voltage Automatic Coffee Brewer with 3 Warmers



Model CWTF-DV
(2 top warmers)
(decanters sold separately)
Dimensions: 18.9" H x 8.5" W x 17.8" D
(48cm H x 21.6cm W x 45.2cm D)

Features

Dual-Voltage Automatic Coffee Brewer

- Brews 3.8 to 7.5 gallons (14.4 to 28.4 liters) of perfect coffee per hour.
- Model with 2 top warmers is space-saving 8.5" (21.6 cm) wide.
- All stainless steel construction.
- Hot water faucet and pourover feature on all models.
- SplashGard® funnel deflects hot liquids away from the hand.

**Dual voltage adaptable, can operate at 120V/15amp or 208-240V/20amp.*



Model CWTF-DV
(3 lower warmers)
(decanters sold separately)
Dimensions: 17" H x 16.5" W x 17.7" D
(43.2cm H x 41.9cm W x 45cm D)

For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQ-17-TL
Product No. : 30200.1000
Dimensions:
12 7/16" H x 2 1/2" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D

Easy Clear® ED-17-TL
Product No. : 30201.1001
Dimensions: 8 1/4" H x 2 5/16" Dia.
20.95 cm H x 5.87 cm Dia.



Paper Filter Pack
Product No. : 20115.6000
Packed per case: 1,000
Dimensions: 4 1/4" Base x 2 3/4" Sidewall
10.8 cm Base x 6.98 cm Sidewall



Easy Pour® black decanter
Product No. : 06100.0201
Quantity: 1 (also packaged in quantities of 3 & 24)



Easy Pour® orange decanter (for decaf)
Product No. : 06101.0201
Quantity: 1 (also packaged in quantities of 3 & 24)



WX1-warmer
Product No. : 06450.6000
One position warmer



WX2-warmer
Product No. : 06310.6000
Two position warmer



Model	Agency Listing
CWTF-DV	

Dimensions & Specifications

CANADA

Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic Ft³/m³	Weight lbs/kg	Cord Attached
CWTF-DV	12950.6100	120	12.1	1150	1450	3.8 gal/14.4 liter	4.0/.11	35 /15.9	No
(2 upper, 1 lower warmer)		120/208*	11.6	2110	2410	6.5 gal/24.6 liter	4.0/.11	35 /15.9	
		120/240*	13.5	2950	3250	7.0 gal/26.5 liter	4.0/.11	35 /15.9	
CWTF-DV	12950.6101	120	12.1	1150	1450	3.8 gal/14.4 liter	6.7 / .19	42 / 19	No
(3 lower warmers)		120/208*	11.6	2110	2410	6.5 gal/24.6 liter	6.7 / .19	42 / 19	
		120/240*	13.5	2950	3250	7.0 gal/26.5 liter	6.7 / .19	42 / 19	


*120/208-240V, 11.6-13.5A, 2640-3400W. "Factory wired" products utilize same product numbers on dataplate to calculate tank heater range.

Brewing capacity: based upon incoming water temp of 60ºF (140ºF rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: If wired for 120V, requires 2-wires plus ground service rated 120V, single phase, 60 Hz.
If wired for 120/208V or 120/240V, requires 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" male flare fitting.

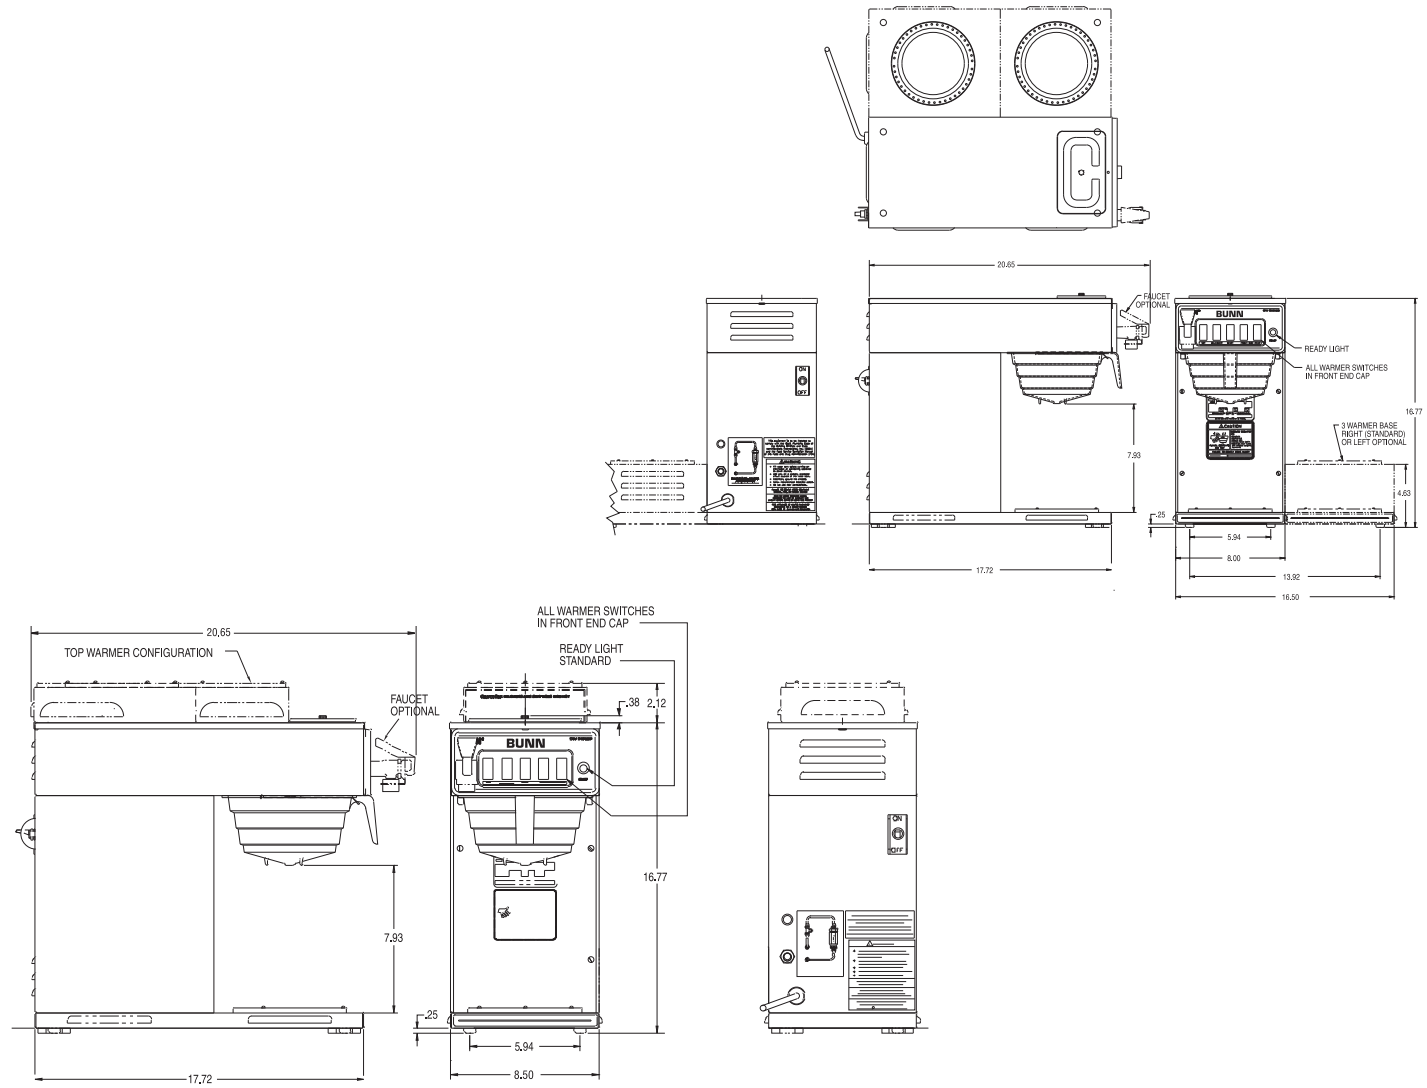

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*