BUNN®

ITEM#

PROJECT

DATE

# AXIOM™ 12 Cup Automatic Coffee Brewer





**Model AXIOM-15-3**
*(decanters sold separately)*

## Features

### AXIOM™ Automatic Coffee Brewers

- Large 200 oz. (5.9 liter) tank provides back-to-back brewing capacity.
- Adjusts automatically to varying water pressure.
- For high lime areas, BrewLOGIC™ technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD™ technology incorporates simplified programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Electronic diagnostics and built in tank drain make service easier.
- Ensures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion or pulse brew and digital temperature control.
- Automatic warmer shut-off.
- Energy-saver mode reduces tank temperature during idle periods.
- Hot water faucet.

**For current specification sheets and other information, go to *www.bunn.com*.**

## Related Products

**Easy Clear® EQ-17-TL**
Product No. : 30200.1000
Dimensions:

**Easy Clear® ED-17-TL**
Product No. : 30201.1001



**Paper Filter Pack**
Product No. : 20115.6000
Packed per case: 1,000
Dimensions: 4¼" Base x 2¾" Sidewall
10.8 cm Base x 6.98 cm Sidewall



**Easy Pour® black decanter**
Product No. : 06100.0201
Quantity: 1 *(also packaged in quantities of 3 & 24)*



**Easy Pour® orange decanter** (for decaf)
Product No. : 06101.0201
Quantity: 1 *(also packaged in quantities of 3 & 24)*



**WX1-warmer**
Product No. : 06450.6000
One position warmer



**WX2-warmer**
Product No. : 06310.6000
Two position warmer



| Model | Agency Listing |
|---|---|
| AXIOM-15-3 | |
| AXIOM-35-3 | |

## Dimensions & Specifications

CANADA


| Model | Product # | Volts | Amps | Tank Htr Watts | Total Watts | Capacity per hour | Cubic ft³/m³ | Weight lbs/kg | Cord Attached |
|---|---|---|---|---|---|---|---|---|---|
| AXIOM-15-3 *1 lower / 2 upper* | 38700.6000 | 120 | 12.5 | 1150 | 1500 | 4.5 gal/17.1 liter | 4/.113 | 30 / 13.6 | Yes |
| AXIOM-35-3 *1 lower / 2 upper* | 38700.6001 | 120/240 | 17.5 | 3500 | 3850 | 7.5 gal/28.4 liter | 4/.113 | 30 / 13.6 | No |
| AXIOM-15-3 *3 lower warmers* | 38700.6004 | 120 | 12.5 | 1150 | 1500 | 4.5 gal/17.1 liter | 4/.113 | 31 / 14.1 | Yes |
| AXIOM-35-3 *3 lower warmers* | 38700.6003 | 120/240 | 17.5 | 3500 | 3850 | 7.5 gal/28.4 liter | 4/.113 | 31 / 14.1 | No |

***Brewing capacity:*** *based upon incoming water temp of 60ºF (140ºF rise) per 1/2 gallon brew time of 4 minutes.*


*Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.*

Electrical: 120 volt, 15 amp. models require 2-wires plus ground service rated 120V, single phase, 60 Hz.
120/240 volt models require 3-wires plus ground service rated 120/240V, single phase, 60 Hz.
An internal terminal block is configured for connection to a 3-wire plus ground.

Plumbing: 20-90 psi (138-621 kPa). Machines supplied with ¼" male flare fitting.

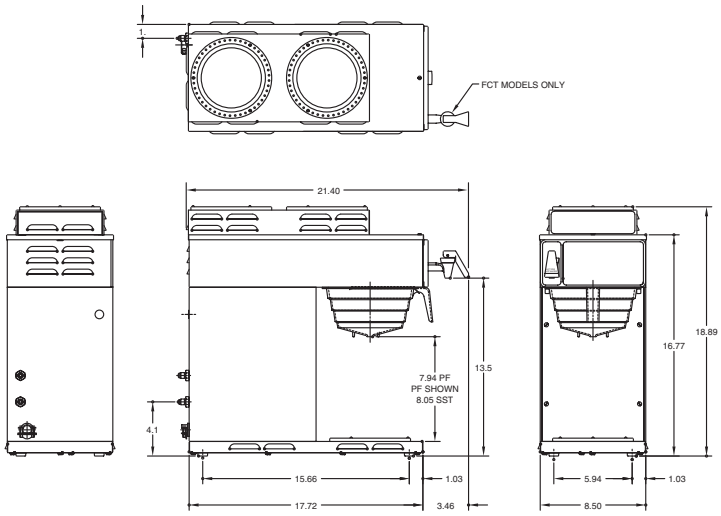


(1 Lower Warmer / 2 Upper Warmers)

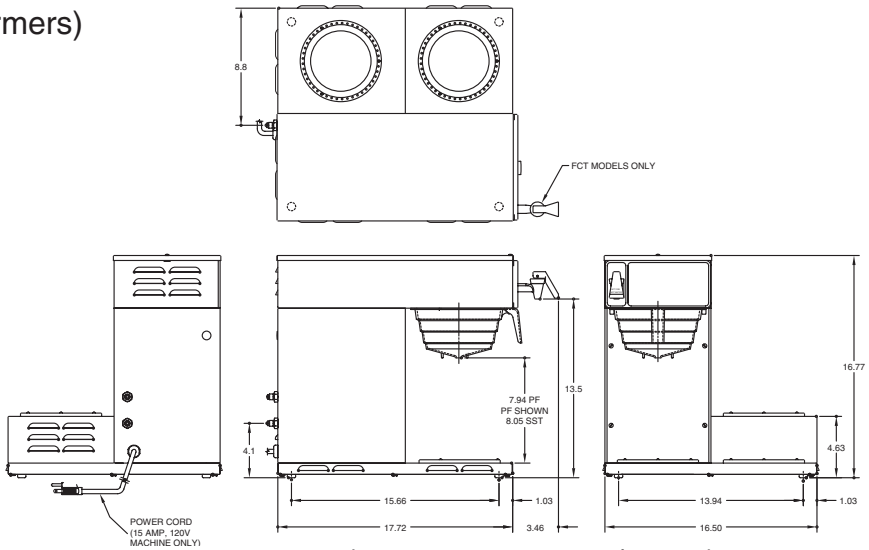


(3 Lower Warmers / Right)

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*