BUNN®

ITEM#

PROJECT

DATE

12 Cup Automatic Coffee Brewer with 6 Warmers



Model CWTF 0/6 Twin

(decanters sold separately)

Dimensions: 20.54" H x 30.75" W x 20.64" D

(52.17cm H x 78.11cm W x 50.43cm D)

Features

12 Cup Automatic Coffee Brewer

- Twin brew head systems.
- Brews 15 gallons (56.8 liters) of perfect coffee per hour.
- Six individually controlled warming stations.
- All stainless steel construction.
- Includes hot water faucet.
- Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.

For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQ-17-TL
Product No. : 30200.1000
Dimensions:
12 7/16" H x 2 1/2" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D

Easy Clear® ED-17-TL
Product No. : 30201.1001
Dimensions: 8 1/4" H x 2 5/16" Dia.
20.95 cm H x 5.87 cm Dia.



Paper Filter Pack
Product No. : 20115.6000
Packed per case: 1,000
Dimensions: 4 1/4" Base x 2 3/4" Sidewall
10.8 cm Base x 6.98 cm Sidewall



Easy Pour® black decanter
Product No. : 06100.0201
Quantity: 1 *(also packaged in quantities of 3 & 24)*



Easy Pour® orange decanter (for decaf)
Product No. : 06101.0201
Quantity: 1 *(also packaged in quantities of 3 & 24)*



WX1-warmer
Product No. : 06450.6000
One position warmer



WX2-warmer
Product No. : 06310.6000
Two position warmer



Model	Agency Listing
CWTF 0/6 Twin	

Dimensions & Specifications

CANADA

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
CWTF 0/6 Twin*	23400.6000	120/240	28.5	2 @ 3000	6850	15 gal/56.8 liter	11.6 /.33	74 / 33	No

* *Stainless Steel Funnels standard.*


Machine has two 3000 watt tank heaters.

Brewing capacity: based upon incoming water temp of 60ºF (140ºF rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 3-wires plus ground, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ⅜" male flare fitting.

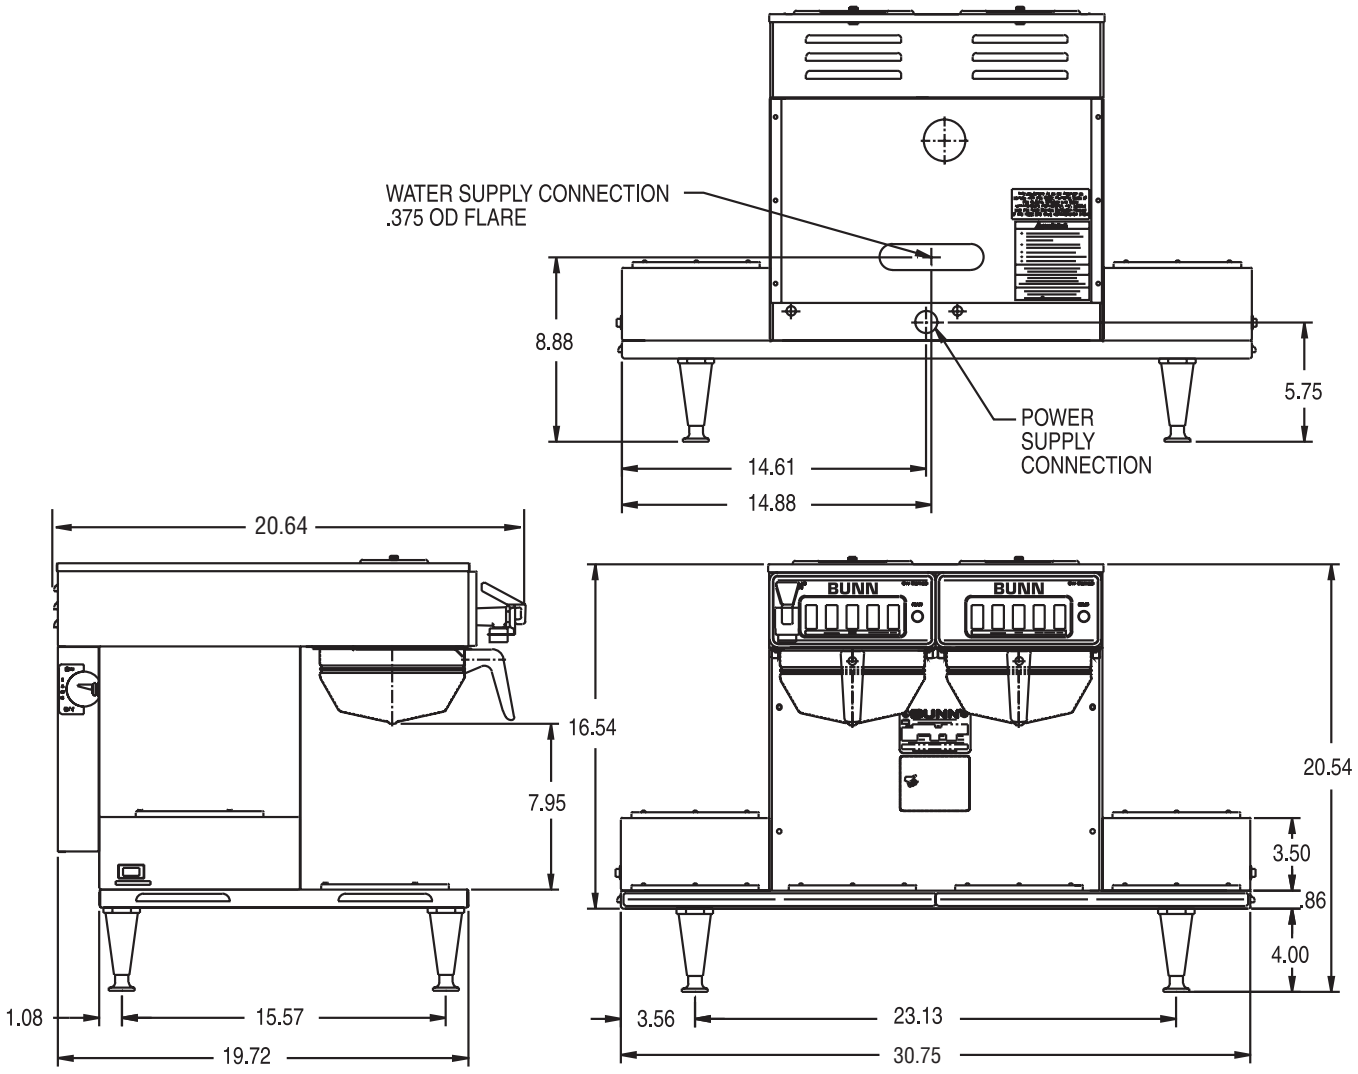

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*