BUNN®

ITEM#

PROJECT

DATE

Titan™ Dual Brewer



Model Titan Dual Brewer with 3 gallon TF Servers
(servers sold separately)
Dimensions: 40.02" H x 35.63" W x 21.74" D
(101.7cm H x 90.5cm W x 55.2cm D)

Features

Titan Dual Brewer

High-volume brewing solution that features simple operation, precise extraction control and portable servers

- Brews 34.3 gallons (129.8 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER™ allows automatic programming of pulse routine.
- SplashGard® funnel and funnel locks help improve safety.
- Funnel has 28 ounce (.8 kg) ground coffee capacity and paper filter retainers to eliminate fold-over.
- Titan TF servers are insulated to keep coffee hot for hours.
- Hot water faucet.
- Energy-saver mode reduces tank temperature during idle periods.

For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQHP-54
Product No. : 39000.0006

Easy Clear® EQHP-54L
Product No. : 39000.0003



Titan TF Server
Product No.: 39400.6000
3 gallon, Mechanical Gauge



Titan Funnel Assy.
Product No.: 40105.7000
(boxed)



Single/Dual Filter Pack
Product No. : 20111.0000
Packed per case: 250
Dimensions:
20" Base x 8" Sidewall
50.8 cm Base x 20.3 cm Sidewall



Model	Agency Listing
Titan Dual	c UL, NSF

Dimensions & Specifications


CANADA

Model	Product #	Volts	Amps	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Funnel Locks	Cord Attached
Titan Dual	39200.6000	120/208 (3-phase)	33.4	12000	34.3 gal/129.8 L	27 /.76	148 /67.1	Yes	No
		*120/208 (single-phase)	40.1	8200	22.9 gal/86.7 L	27 /.76	148 / 67.1	Yes	No
Titan Dual	39200.6001	120/240 (3-phase)	28.9	12000	34.3 gal/129.8 L	27 /.76	148 /67.1	Yes	No
		*120/240 (single-phase)	35	8200	22.9 gal/86.7 L	27 /.76	148 / 67.1	Yes	No

Brewing capacity: *based upon incoming water temp of 60ºF (140ºF rise).*
Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.
**Brewer can easily be rewired in the field for single-phase operation.*

Electrical: Brewer is 4-wires plus ground service rated 120/208V, 3-phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ⅜" male flare fitting.

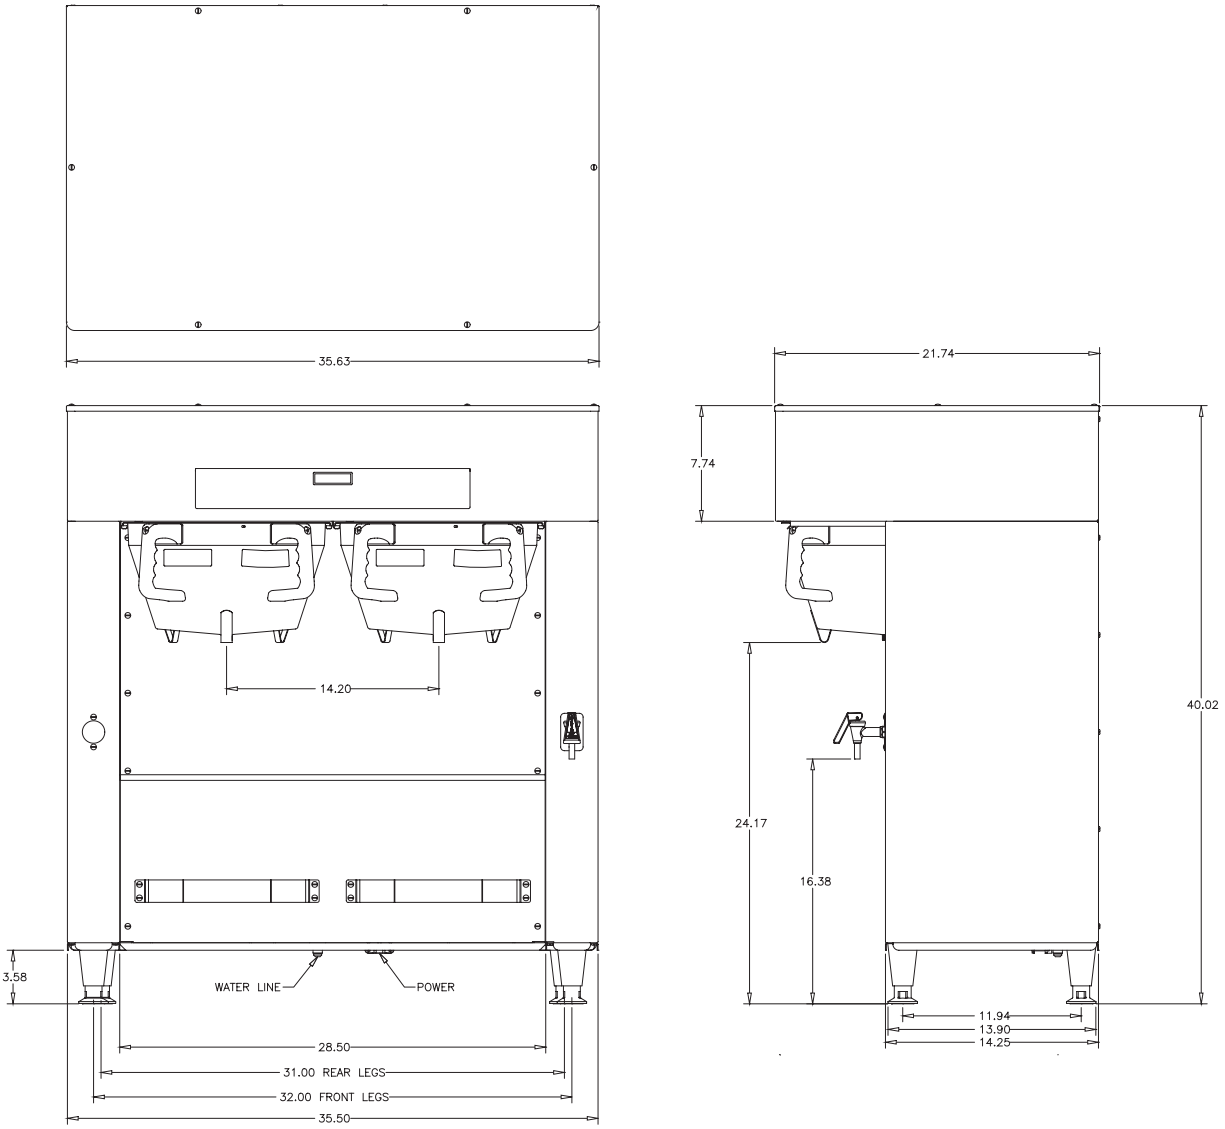

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*