BUNN®

ITEM#

PROJECT

DATE

1 Gallon Automatic Coffee Brewer with Portable Server



Model Single CWTF with 1.5 GPR Server
Dimensions: 26.1"H x 8.5"W x 18.9"D
(66.3cm H x 21.6cm W x 48cm D)

Features

One Gallon Automatic Coffee Brewer

- Brews 3.8 to 9 gallons (14.4 to 34.1 liters) of perfect coffee per hour.
- ½ gallon and 1 gallon (1.9 and 3.8 liter) batches brewed into 1.5 GPR portable server (server included).
- Gourmet funnel allows use of heavier throw weights of coffee.
- Hot water faucet.
- ½ gallon (1.9 liter) pourover backup on all models.
- SplashGard® funnel deflects hot liquids away from the hand.
- All stainless steel construction.

For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQ-17-TL
Product No. : 30200.1000
Dimensions:
12 7/16" H x 2 1/2" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D

Easy Clear® ED-17-TL
Product No. : 30201.1001
Dimensions: 8 1/4" H x 2 5/16" Dia.
20.95 cm H x 5.87 cm Dia.



Single / Dual Filter Pack
Product No. : 20100.0000
Packed per case: 500
Dimensions: 5 1/4" Base x 3 3/4" Sidewall
13.3 cm Base x 9.5 cm Sidewall



1.5 GPR SS Portable Server on an RWS1 Warmer
1GPR Product No. :
20950.6001
RWS1 Product No. :
12203.6001



Model	Agency Listing
Single CWTF15	
Single CWTF35	

Dimensions & Specifications


CANADA

Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic Ft^3 / m^3	Weight lbs / kg	Cord Attached
Single CWTF15	35000.6004	120	10.8	1150	1300	3.8 gal/14.4 liter	5.58/.16	46.5 / 21.1	Yes
Single	35000.6006	120/208	15.8	3500	3650	7.5 gal/28.4 liter	5.58/.16	46.5 / 21.1	No
CWTF35		120/240	15.8	3500	3650	9.0 gal/34.1 liter	5.58/.16	46.5 / 21.1	No

Brewing capacity: based upon incoming water temp of 60ºF (140ºF rise) per 1/2 gallon brew time of 4 minutes.
Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 120 volt model requires 2-wires plus ground service rated 120V, single phase.
240 volt model requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" male flare fitting.

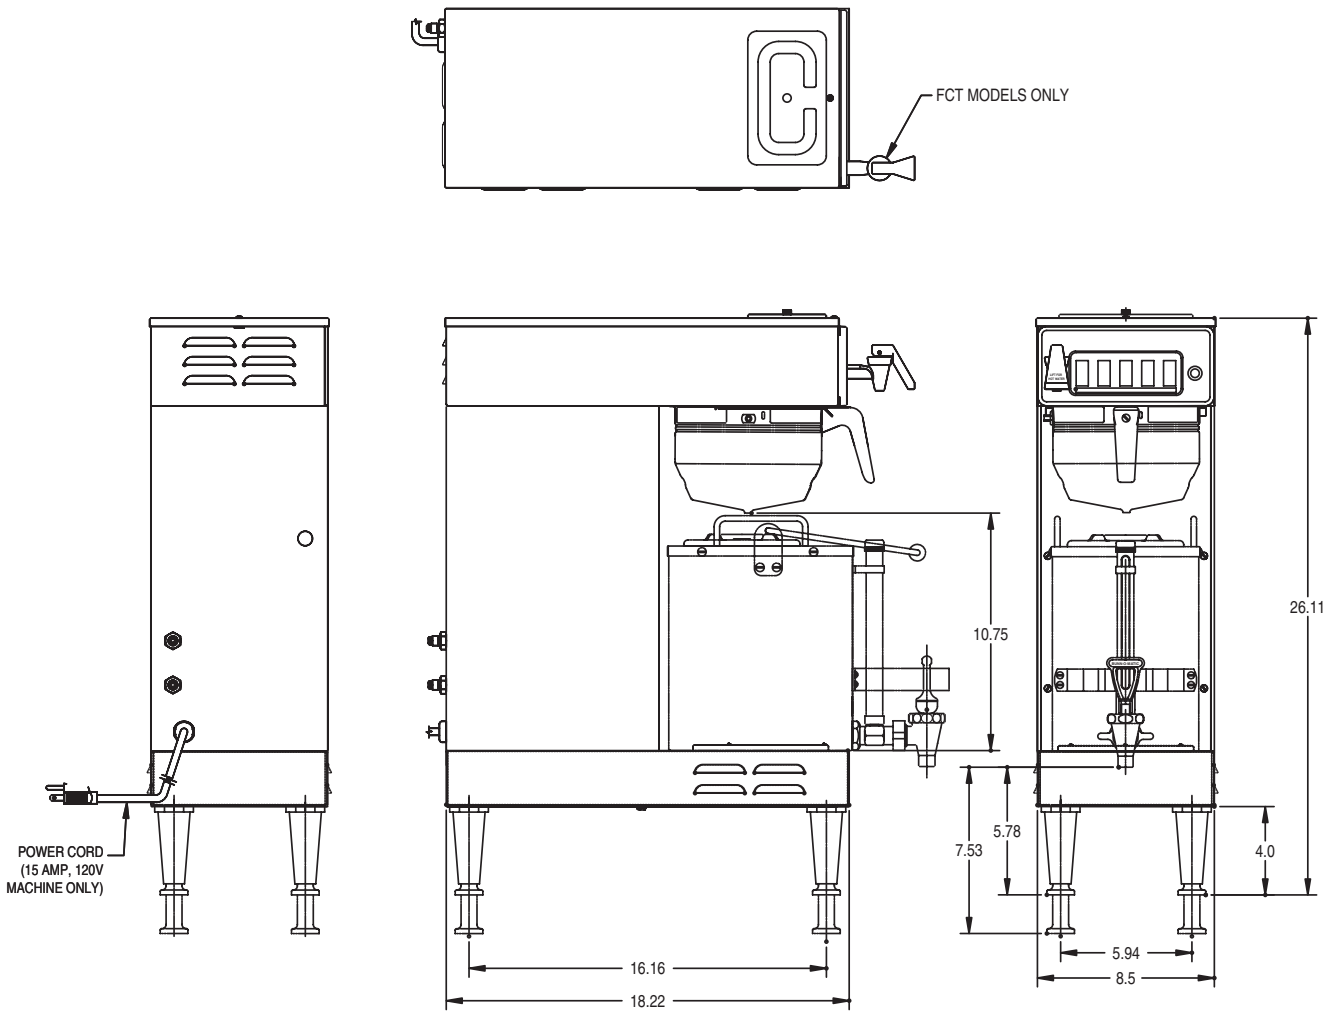

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*