BUNN® INTERNATIONAL

ITEM#

PROJECT

DATE

Dual Soft Heat® Multi-Phase Brewer with Docking System



Dual SH MP with SH Servers
(servers sold separately)
Dimensions: 35.8" H x 18" W x 20.5"D
(91cm H x 45.7cm W x 52.1cm D)

Features

Coffee brewers with portable servers

- Variable batch selector allows you to brew ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 litre) batches.
- Brewer can be field converted to operate on either 3 phase or 1 phase.
- Patented server heat control automatically shuts off once target temperature is reached. Can be set to 175º–190ºF (79.4–87.8ºC).
- High-lime resistant tank with drain.
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- Holds two SH servers (sold separately).
- Master on/off switch.
- Safety-Fresh® patented brew-through lid with vapor seal and spill prevention.
- Remote 1 or 2 server docking stations for additional satellite coffee serving. (sold separately)
- Variable batch selector knob lets you brew large batches or small servings.
- Brew capacity varies by model. See back for details.

For current specification sheets and other information, go to *www.bunn.com*.

International models may vary in appearance.

Related Products

Easy Clear® EQHP-25L
Product No. : 39000.0002

Easy Clear® EQHP-25
Product No. : 39000.0005



Single/Dual Filter Pack
Product No. : 20138.0000



SH Server
Product No. : 27850.0001



2SH Stand
Product No. : 27875.0001
(230 volt)



Two Position Drip Tray
Product No.: 27150.0000



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
Dual SH	27900.0031	230/400	25	9093	10,000	26.0 gal./hr.	90 lbs.	No	CE
Multi-Phase	*3 phase with neutral*					(98.4 L/hr)	(40.9 kg)		
	1 phase	230	26.8	2@3030	6160	17.3 gal./hr.	90 lbs.	No	
						(65.5 L/hr)	(40.9 kg)		


Note: *Soft Heat® Brewers and Servers are sold, boxed and shipped separately.*
Brewing capacity: *based upon incoming water temp of 60ºF (140ºF rise) per ½ gallon (1.89 L) brew time of 4 minutes.*

Electrical: Brewer is configured for 3-phase (with neutral) use. By moving one wire in brewer's terminal block, the same unit can be configured for 1-phase (230 volt) operation.

3-Phase - Phase to phase = 400V (will work on any voltage rated 380-415). Phase to neutral = 230V. 4 wire plus ground, 50-60Hz, 3 active heaters.

1-Phase - Voltage = 230, 2 wire plus ground, 50-60Hz, 2 active heaters.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" male fitting.

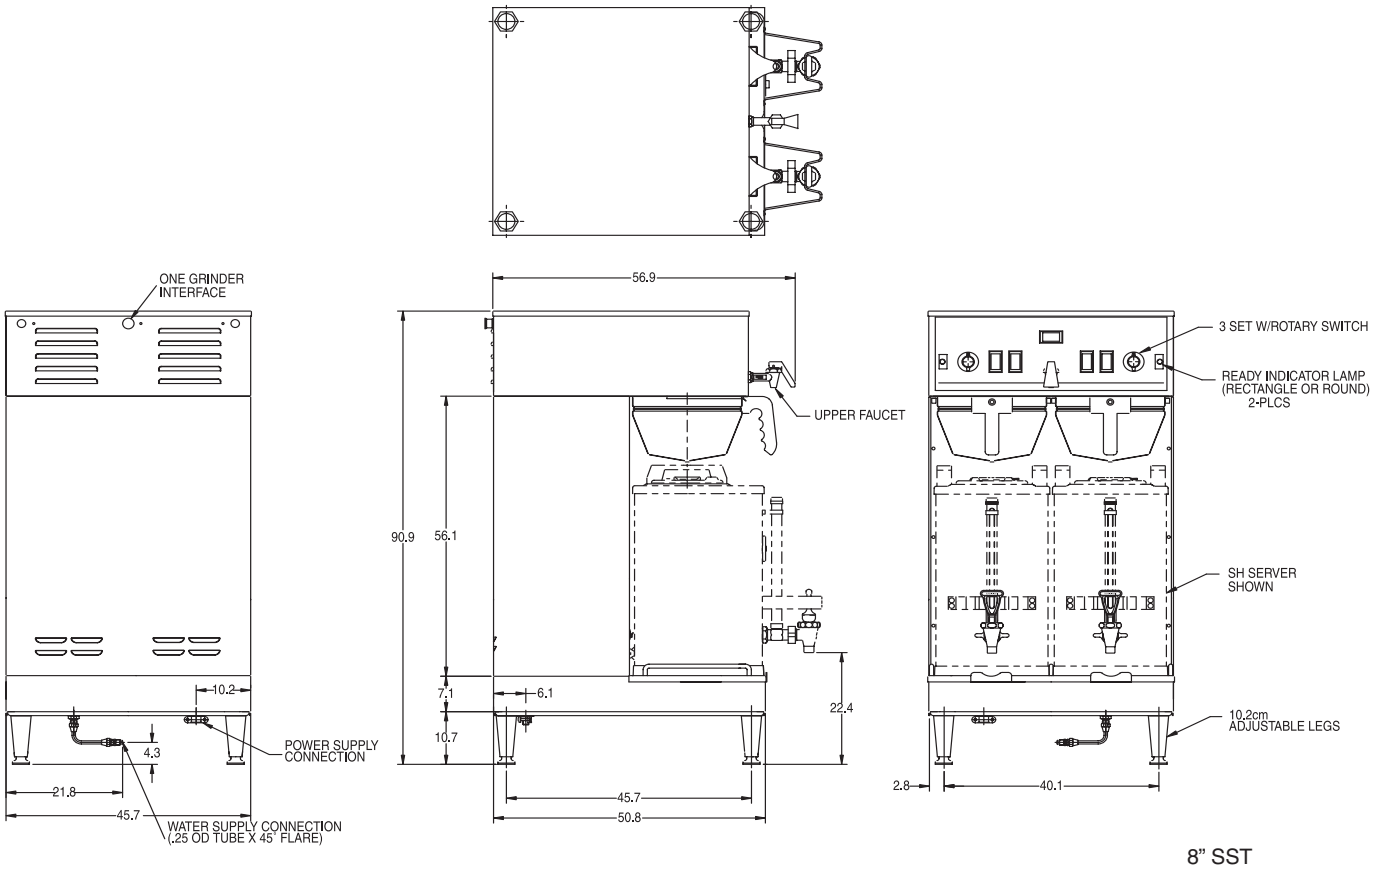

8" SST adjustable legs also included.

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

9/08 © Bunn-O-Matic Corporation