BUNN®

# trifecta® Air Infusion™ Single Cup Brewer

ITEM#

PROJECT

DATE



**trifecta**

Dimensions: 26.73"H x 11.89"W x 11.87"D

*(60.3cm H x 30.2cm W x 30.1cm D)*

## Features

***Tech enabled barista crafted single cup***

Every coffee has a voice. With the trifecta, the barista creates an experience which unlocks the nuances of that coffee. Using an air infusion single cup process, the trifecta brews so that each coffee's unique voice resonates.

### trifecta brewing phases:

***1 Wetting***

The saturation of the coffee grounds can be controlled to get the percentage of water and pause appropriate for that coffee.

***2 Extraction***

Controlled air is injected into the brew chamber to agitate the coffee at just the right time. The result is a uniform extraction and complex beverage sure to please any coffee lover.

***3 Hydrolysis***

Air presses the beverage through a metal screen that filters out coffee grounds while preserving coffee oils and aromatics for a deep-bodied, unique coffee experience.



**For current specification sheets and other information, go to *www.trifectaexperience.com*.**

## Related Products

**trifecta Brew Chamber**
Product No. : 43279.1000



**trifecta Cup Assembly**
Product No. : 42388.1000



**trifecta Check Valve**
Product No. : 42610.1000



**trifecta Accessory Kit**
Product No. : 42768.1000

**trifecta Cleaning Tablets**
Product No. : 42933.1000




**G2 trifecta Grinder**
Product No. : 41900.0000







back view

| Model | Agency Listing |
|---|---|
| TRIFECTA | ETL NSF |


## Dimensions & Specifications

| Model | Finish | Product # | Volts | Amps | Total Watts | Cu. Ft. | Shipping Weight | Cord Attached |
|---|---|---|---|---|---|---|---|---|
| TRIFECTA | Silver | 41200.0000 | 120 | 11.45 | 1375 | 2.48 | 41.7 lbs. | Yes |
| TRIFECTA | White | 41200.0005 | 120 | 11.45 | 1375 | 2.48 | 41.7 lbs. | Yes |
| TRIFECTA | Black | 41200.0006 | 120 | 11.45 | 1375 | 2.48 | 41.7 lbs. | Yes |

*Power cord (NEMA 5-15P) 15 Amp-120V machine only.*

Electrical: 2-wires plus ground service rated 120V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with ¼" (6.4 mm) male flare fitting.

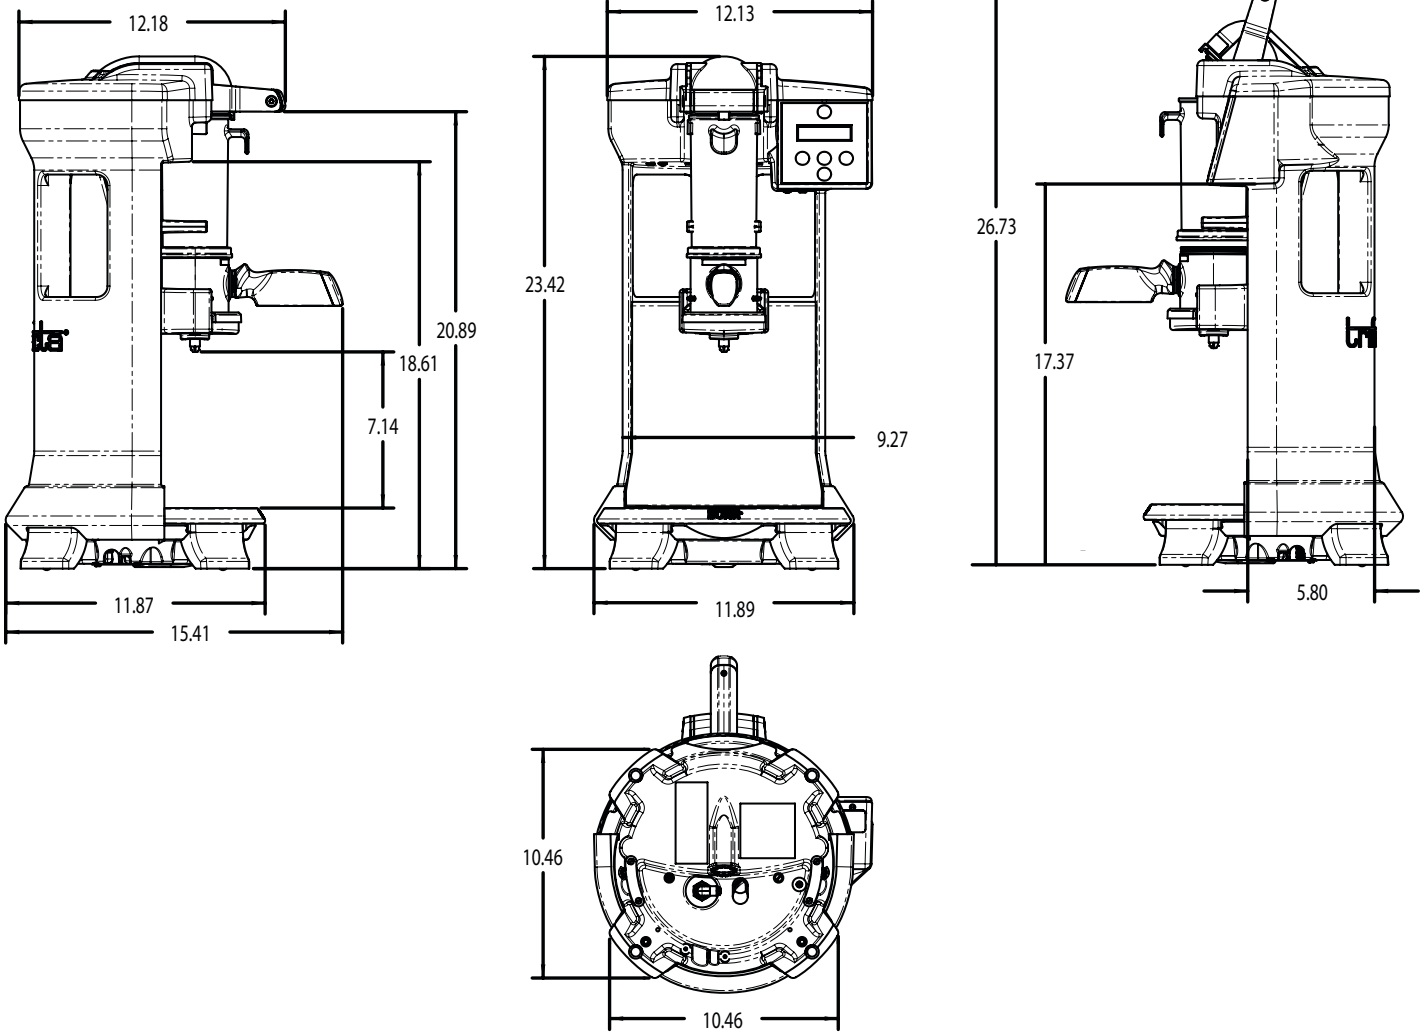


Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

10/12 © Bunn-O-Matic Corporation