BUNN®

ITEM#

PROJECT

DATE

# 3 Gallon Low Profile Iced Tea Brewer with Portable Server




**Model TB3Q-LP with TDO-3.5 Dispenser**

Dimensions: 28.75" H x 11.57" W x 21.87"D

*(73cm H x 29.38cm W x 55.55cm D)*

## Features

### Iced Tea Brewer

- Brews 23 gallons (87 litres) per hour from real tea leaves.
- Brews directly into included TDO-3.5 gallon dispenser with brew-through lid.
- Sleek, compact, low-profile styling to accommodate a variety of spaces.
- Quickbrew (Q) models available for shorter brewing cycles.
- SplashGard® funnel deflects hot liquids away from the hand.
- TB3-LP has adjustable stop time for more control over flavor extraction.
- International models available.

**For current specification sheets and other information, go to *www.bunn.com*.**

## Related Products

**Easy Clear® EQHP-TEA**
Product No. : 39000.0007

**Easy Clear® EQHP-TEACRTG**
Product No.: 39000.1007



**Single/Dual Filter Pack**
Product No. : 20100.0000
Packed per case: 500
Dimensions: 5¼" Base x 3¾" Sidewall
*13.34 cm Base x 9.52 cm Sidewall*



**TDO-3.5 – Tea Dispenser**
Product No. : 37100.0000
Capacity: 3.5 gal / 13.2L
Weight: 10 lbs. /4.5 kg
10" H x 10.7" W x 13.7" D
*25.4cm H x 27.18cm W x 34.8cm D*




**TB3 LP - Remote Stand**
Product No. : 37675.0001




**Translucent Pouchpack Tea Funnel**
Quick dispense, TB-3Q
Product No. : 35282.0001
Standard dispense, TB-3
Product No. : 35282.0002



| Model | Agency Listing |
|---|---|
| TB3Q-LP | |
| TB3-LP | |

## Dimensions & Specifications


CANADA

| Model | Product # | Volts | Amps | Tank Htr Watts | Total Watts | Capacity per hour | Cubic ft³/ m³ | Weight lbs /kg | Cord Attached |
|---|---|---|---|---|---|---|---|---|---|
| TB3Q-LP | 36700.6100 | 120 | 12 | 1400 | 1460 | 23 gal/ 87 liters | 4.15 / .117 | 43 lbs/19.5 | Yes* |
| TB3-LP | 36700.6102 | 120 | 12 | 1400 | 1460 | 23 gal/ 87 liters | 4.15 / .117 | 43 lbs/19.5 | Yes* |

**Power cord (NEMA 5-15P) 15 Amp-120V machine only.*

Electrical: Models require 2-wires plus ground service rated at 120V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" OD male flare fitting.

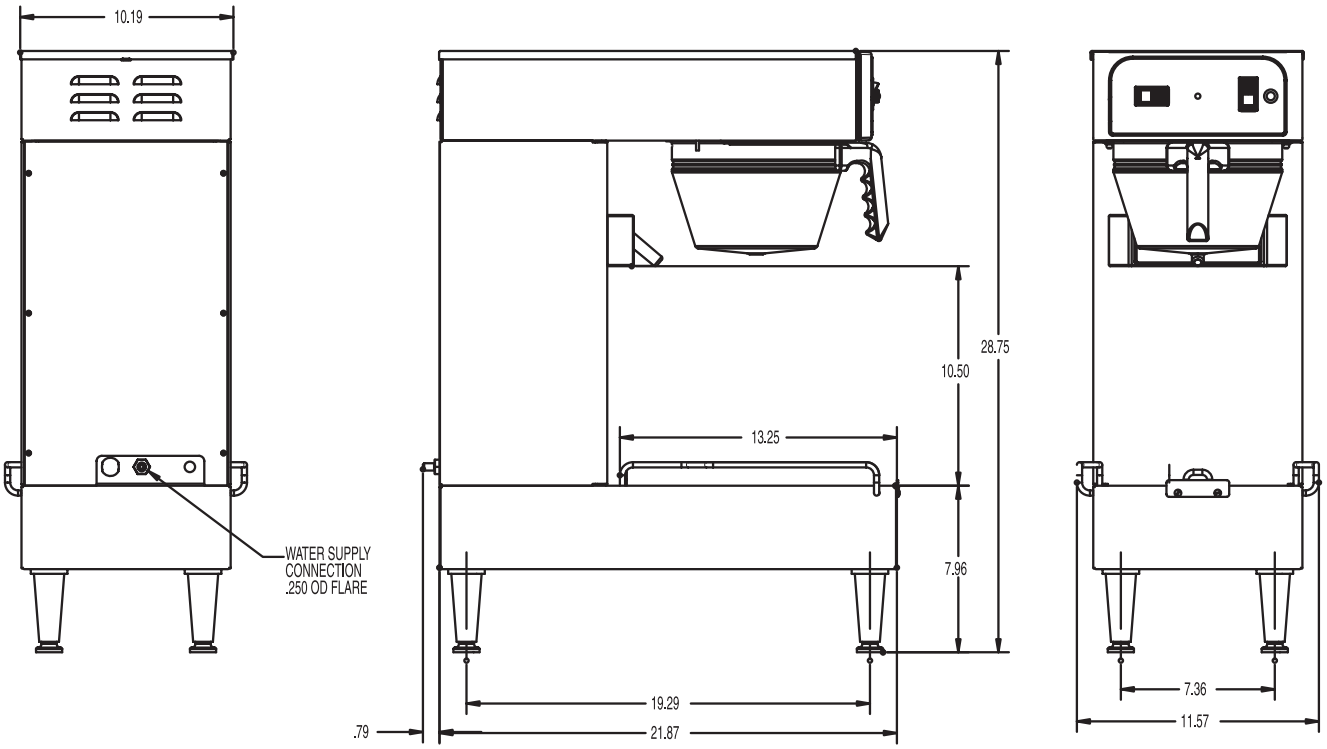


Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*