BUNN®

ITEM#

PROJECT

DATE

3 Gallon Iced Tea Brewer with Portable Server



Model TB3Q with TDO-4 Dispenser
(TDO-4 sold separately)
Dimensions (29" trunk): 34" H x 11.6" W x 22"D
(86.4cm H x 29.5cm W x 58.4cm D)
Dimensions (25.75" trunk): 31" H x 11.6" W x 22" D
(78.7cm H x 29.5cm W x 58.4cm D)

Features

Iced Tea Brewer

- Brews 16.3 to 23 gallons (61.7 to 87 litres) per hour from real tea leaves.
- Brews directly into any style portable server.
- Meet your volume needs; brew 3 gallons (11.36 litres) of iced tea at a time.
- Quickbrew (Q) models available for shorter brewing cycles.
- SplashGard® funnel deflects hot liquids away from the hand.
- TB3 has adjustable steep time for more control over flavor extraction.
- International electrical configurations available.

For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQHP-Tea
Product No. : 39000.0007



Easy Clear® EQHP-TEACRTG
Replacement Cartridge
Product No. : 39000.1007

Single/Dual Filter Pack
Product No. : 20100.0000
Packed per case: 500
Dimensions: 5¼" Base x 3¾" Sidewall
13.34 cm Base x 9.52 cm Sidewall



TDO-4 – Tea Dispenser
Product No. : 34100.0002
Capacity: 4 gal./15 L
Weight: 13 lbs./5.9 kg
Dimensions:
19" H x 10.7" W x 13.7" D
48.26 cm H x 27.18 cm W x 34.8 cm D



TDS-3.0 – Tea Dispenser
Product No. : 33000.0000
Capacity: 3.0 gal./11.35 L
Weight: 9.4 lbs./4.26 kg
Dimensions:
19"H x 9.8"W x 12.8"D
48.3cm H x 24.9cm W x 32.5cm D



TD4T – Tea Dispenser
Product No. : 03250.6002
Capacity: 4 gal./15 L
Weight: 14 lbs./ 6.35 kg
Dimensions:
21.9" H x 9" W x 13" D
55.63 cm H x 22.86 cm W x 33.02 cm D



Translucent Pouchpack Tea Funnel
Quick dispense, TU-3Q
Product No. : 35282.0001
Standard dispense, TU-3
Product No. : 35282.0002



Model	Agency Listing
TB3Q	
TB3	

Dimensions & Specifications


CANADA

Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft^3 / m^3	Weight lbs/kg	Cord Attached
TB3Q w/TD4T	36700.6041	120	12	1400	1460	23 gal /87 liters	10 / .35	55 / 19	Yes†

†Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Electrical: Models require 2-wires plus ground service rated at 120V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" OD male flare fitting.

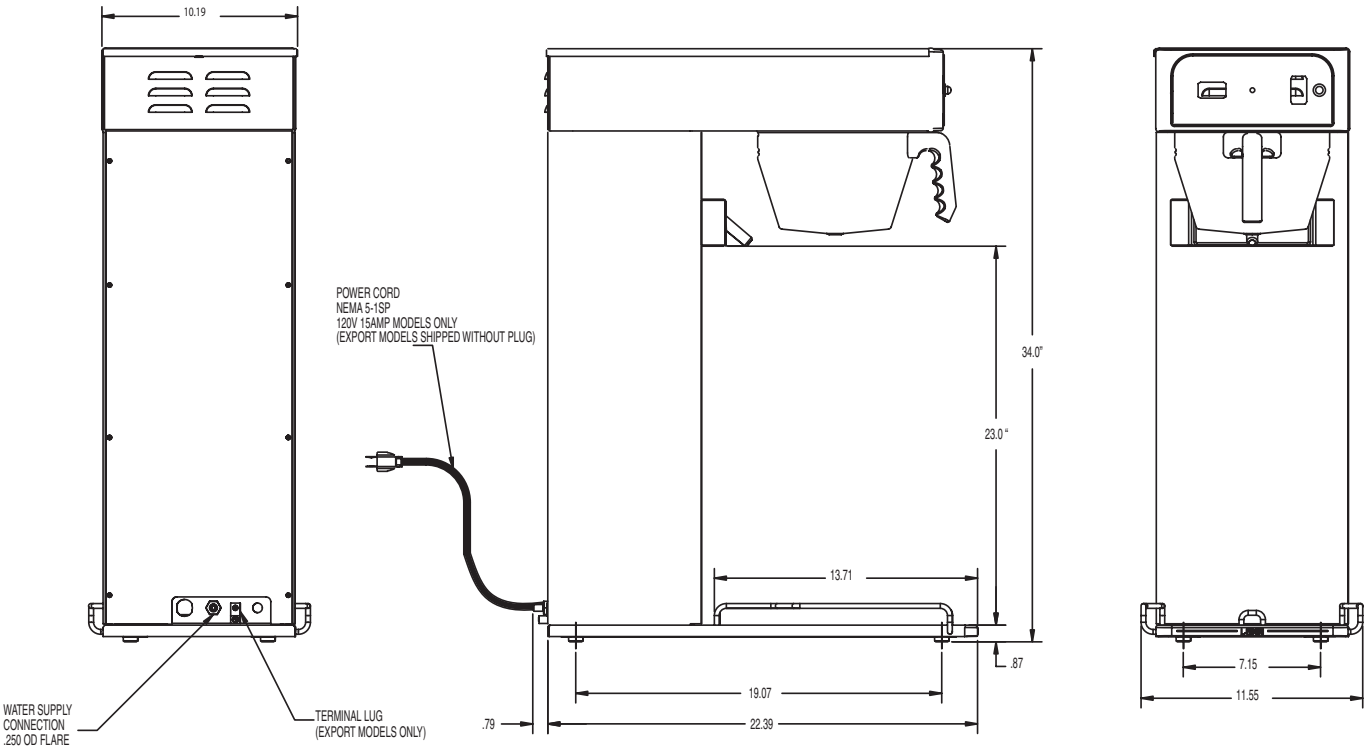

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*