BUNN®

ITEM#

PROJECT

DATE

Powdered Autofill Ultra™
Frozen Beverage System with 2 Hoppers



Model ULTRA-2 PAF
Dimensions:
42"H x 16"W x 25"D
(106.7cm H x 40.6cm W x 63.5cm D)

Features

Ultra Frozen Beverage System

- Powdered autofill product hoppers refill product at a rate of 1.1 fluid oz./sec.
- Reversing auger design quickens freeze time and reduces air mixing.
- Very simple to program and run with touchpad display, which also guides cleaning and preventive maintenance.
- Enhanced "no-lube" design on faucets and seals which simplifies installation and cleaning.
- Refrigeration system internally monitored to ensure long lasting performance.
- Two large 2 gallon (7.57 liter) hoppers for optimum cooling & serving capacity.
- Full 3-year parts and labor warranty on electronics and 5-year parts warranty on compressor. See the product manual for additional details.
- Sanitation listed by NSF to Standard 18 (includes dairy & alcohol) and safety listed by ETL to UL Standard (UL 471) and CSA Standard (C22.2 No. 120).
- International electrical configurations available.
- LED backlighting for displays.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Conversion Kit
Kit converts hoppers on CDS-2 PAF machine to new ULTRA-2 PAF style hopper/faucet.

CDS-2 PAF Hopper Kit
Product No.: 28485.0046



Plastic hoppers pull out easily to refill powdered product.

Model	Agency Listing
ULTRA-2 PAF	NSF ETL

Dimensions & Specifications


CANADA


Model	Product #	Volts	Amps	Capacity Dry Product	Cubic Ft^3/m^3	Weight lbs / kg	Cord Attached
ULTRA-2 PAF (White/Stainless)	34000.6500	120	15*	5 lbs. (2.3 kg)	37.5/1.06	177 / 80.29	Yes*
ULTRA-2 PAF (Black/Stainless)	34000.6501	120	15*	5 lbs. (2.3 kg)	37.5/1.06	177 / 80.29	Yes*
ULTRA-2 PAF (All Black)	34000.6504	120	15*	5 lbs. (2.3 kg)	37.5/1.06	177 / 80.29	Yes*

** Total Amps (15A) are based on an ULTRA2 at 11.0 Amps and two PAF Units totalling 4.0 Amps. Two Power cords (NEMA 5-15P) are included and must be connected individually to seperate 15 Amp 120V circuits.*

Electrical: Model requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" male flare fitting.

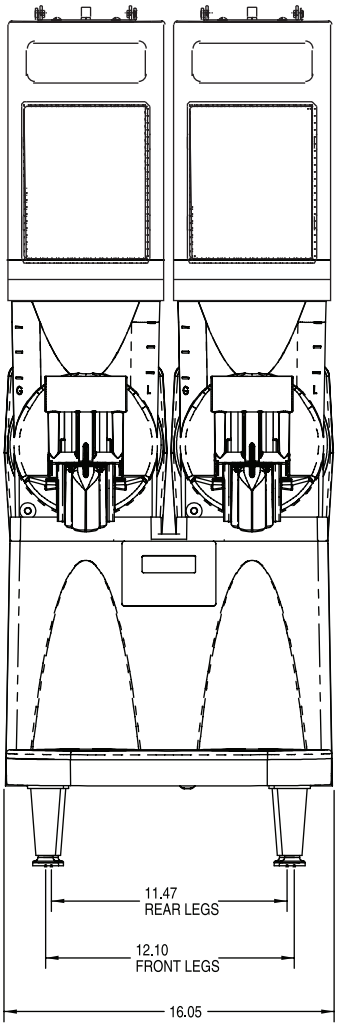

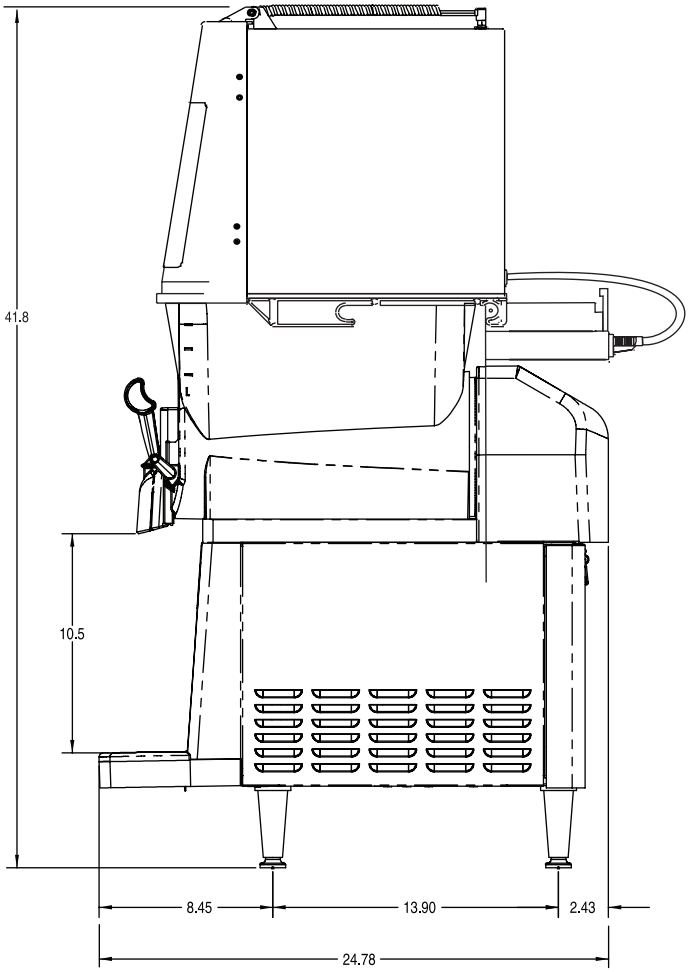

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*