BUNN®

ITEM#

PROJECT

DATE

Fresh Mix Dispenser with 1 or 2 Hoppers



Model FMD-1

Models FMD-1 & FMD-2
Dimensions: 30"H x 7.9"W x 21"D
(76.2cm H x 20.1cm W x 53.3cm D)

Features

Fresh Mix Dispensers

- Space saving narrow 8" (20.3 cm) cabinet width.
- Variable speed hopper motors offer a wide range of product mix ratios (.75 to 6.6 grams of powder per second).
- Large easy-to-fill translucent hoppers ensure quick and timely refilling.
  FMD-1 = one 8 lbs. (3.6 Kg)
  FMD-2 = two 4 lbs. each (1.8 Kg)
- Lighted graphics merchandise drinks for maximizing profits.
- Large hot water reservoir provides 4.2 gal. (15.9 L)/hour serving capacity.
- Adjustable legs & drip tray allows up to 7" (17.8 cm) opening for 20 oz. cups.
- Specially designed mixing system guarantees perfect beverages every time.
- Improved automatic rinse reduces run-on after beverage is dispensed.
- Designed to be easily serviced from front and top of machine.



Model FMD-2



Model FMD-1 available with optional Hot Chocolate Display

For current specification sheets and other information, go to *www.bunn.com*.

Related Products


Easy Clear® EQHP-10
Product No. : 39000.0004

Easy Clear® EQP-10L
Product No. : 39000.0001



Features deluxe whipper chambers:

1. Robust whipper to ensure full flavor yield.
2. Specially designed self cleaning mixing chamber.
3. Exhaust fan to siphon off moisture that can cause powder buildup.
4. Hot water dispense for easy clean-out.
5. Quick disconnecting parts for thorough sanitizing.

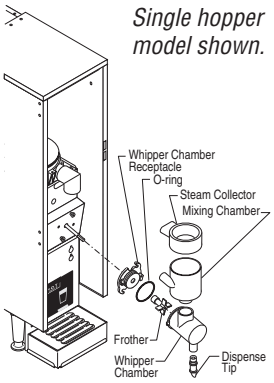

Single hopper model shown.

Model	Agency Listing
FMD-1	
FMD-2	

Dimensions & Specifications

CANADA

Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Brewing Capacity/hr	Cubic ft³/m³	Weight lbs./kg	Cord Attached
FMD-1 BLK	28700.6001	120	11.7	1320	1400	4.2 gal./15.9**	7.6 /.22	64 / 29	Yes*
FMD-1 BLK	28700.6004	120/240	15.4	3500	3600	8.5 gal./32.2**	7.6 /.22	64 / 29	Yes†
FMD-1 BLK PC	28700.6006	120	11.7	1320	1400	4.2 gal./15.9**	7.6 /.22	64 / 29	Yes*
FMD-2 BLK	29200.6001	120	11.7	1320	1400	4.2 gal./15.9**	7.6 /.22	69 / 31	Yes*


**Power cord (NEMA 5-15P) 15 Amp-120V machine only. † Power cord (NEMA L14-20P) 120/240 V machine only.*

***Based on incoming water temperature of 50ºF.*

Mug display standard on all models. Hot chocolate display option available as special order on FMD-1.

Electrical: 120V Model requires 2-wires plus ground service rated 120V, single phase, 60 hz. 120/240V model requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa) from a ⅜" (10 mm) or larger supply line. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce it to 50 psi. Supplied with ¼" (6.4 mm) male flare fitting.

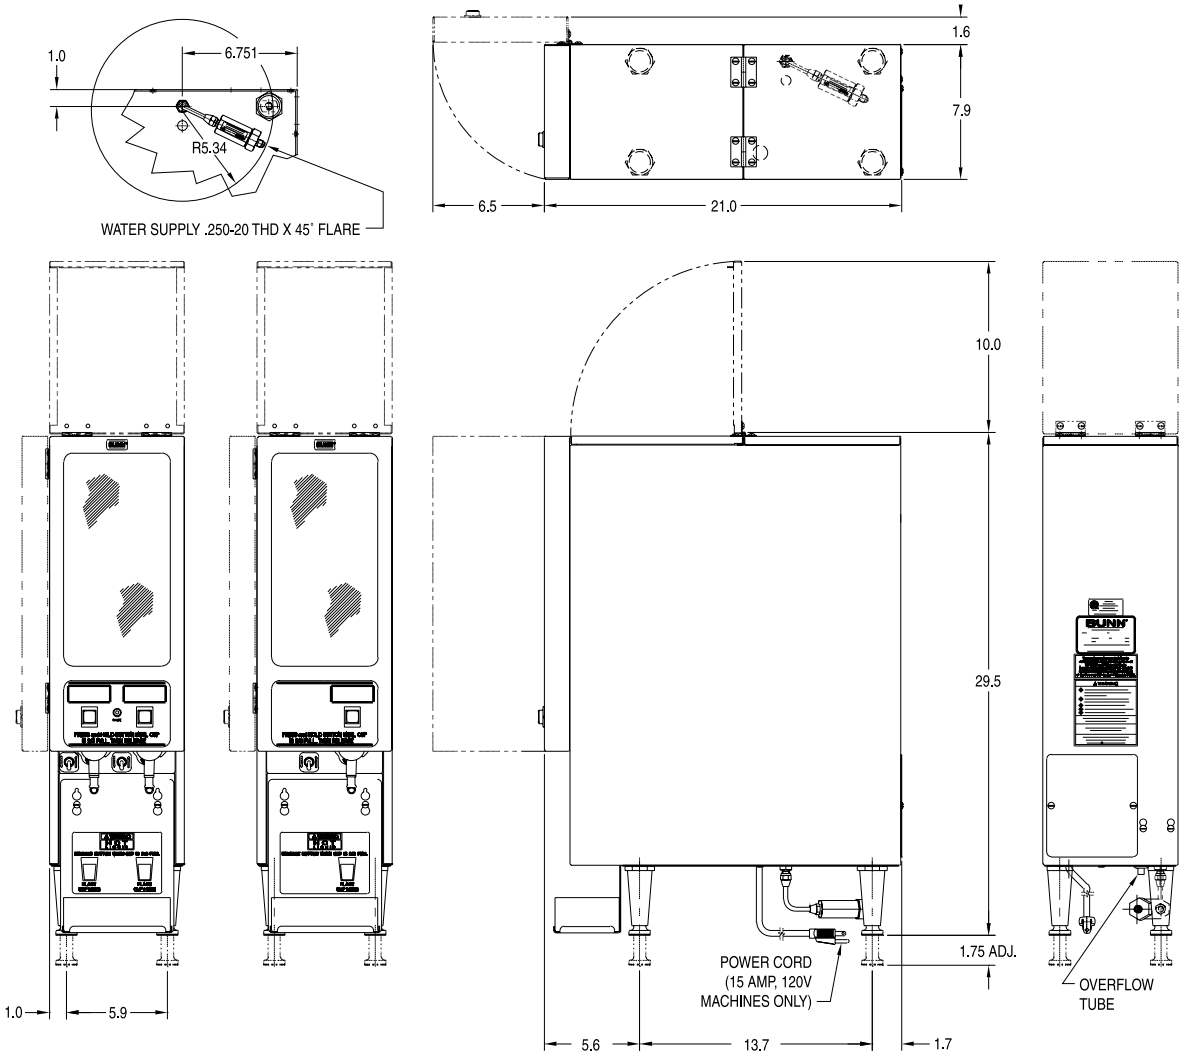

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*