BUNN® INTERNATIONAL

ITEM#

PROJECT

DATE

# Fresh Mix Dispenser with 3 Hoppers





**FMD DBC-3**
Dimensions: 30”H x 11.3”W x 23.3”D
*(76.2 cm H x 28.7 cm W x 59.2 cm D)*

## Features

### FMD DBC Dispenser

- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second).
- Lighted front graphics for merchandising are easy to exchange: cappuccino or soup.
- Additional displays available.
- Attractive high-impact resin door is dent and scratch resistant.
- Large easy-to-fill translucent hoppers hold 4 lbs. (1.81 kg) of product each, ensuring quick and timely refilling.
- High speed heavy-duty whipper for complete product mixing.
- Improved automatic rinsing of whipper reduces run-on after beverage is dispensed.
- Adjustable legs and drip tray accommodate 20 oz. (591.5 mL) mugs easily.
- Electrical and plumbing components easily accessible through front and top.
- Easy-to-program, one-touch portion control for 3 cup sizes.
- Fast fill perfect for quick service restaurants.
- Each mixing chamber has independent powder to water ratio.
- System setup is password protected for safety.
- Simple setup and hopper throw calibration system.
- Hot water dispense.

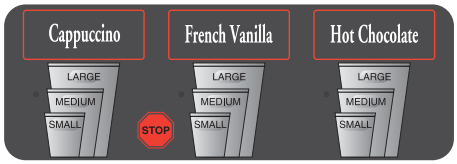


## Dimensions & Specifications

| Model | Product # | Volts | Amps | Tank Heater Watts | Total Watts | Capacity | Shipping Weight | Cord Attached | Agency |
|---|---|---|---|---|---|---|---|---|---|
| FMDA-3 DBC | 29250.0010 | 230 | 15 | 3500 | 3600 | 8.7 gal./hr. *(32.9 L/hr.)* | 85 lbs. *(38.6 kg)* | Yes | CE |
| FMDA-3 DBC† | SET00.0174 | 230 | 15 | 3500 | 3600 | 8.7 gal./hr. *(32.9 L/hr.)* | 85 lbs. *(38.6 kg)* | Yes | CE |

†German manuals

Electrical: 230V model requires 2 wires plus ground service rated 220-240V, single phase, 50/60 Hz.

Plumbing: 20-90 psi *(138-621 kPa)* from a ⅜" or larger supply line. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce it to 50 psi. Supplied with ¼" male flare fitting. Tank capacity is 3.2 gal *(12.2 L)*.

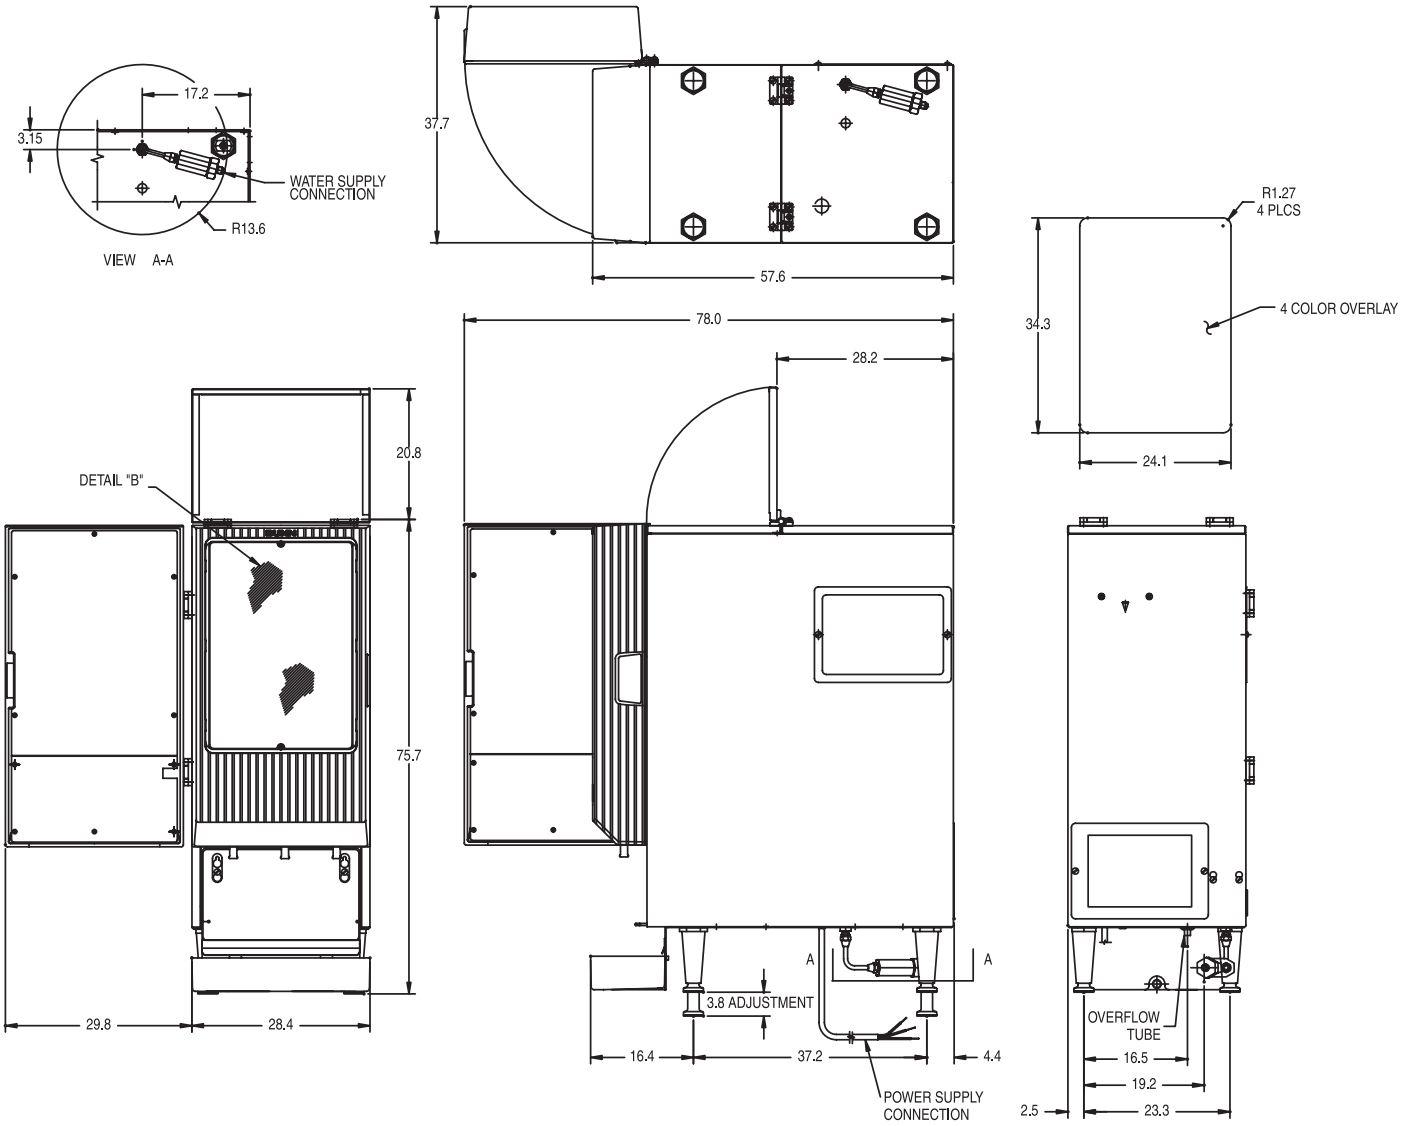




BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

**All dimensions shown in centimeters.**

*1/13 © Bunn-O-Matic Corporation*