BUNN®

5 Gallon Portion Control
Dual Voltage Hot Water Machine

ITEM#

PROJECT

DATE



Model H5E-DV PC
Dimensions: 28.4"H x 7"W x 15.5"D
(72.1cm H x 17.8cm W x 39.4cm D)

Features

5 Gallon Portion Control Hot Water Machine

- Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff.
- Prepare large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal, and many more foods.
- Dispenses hot water in three portion sizes.
- Precise electronic temperature contol (65˚F-205ºF) (18.3ºC-96.1ºC) ensures consistent water temperature.
- Three programmable volume settings and one push and hold continuous dispense button.
- Front of machine volume programming.


For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQHP-10L
Product No. : 39000.0001

Easy Clear® EQHP-25L
Product No. : 39000.0002



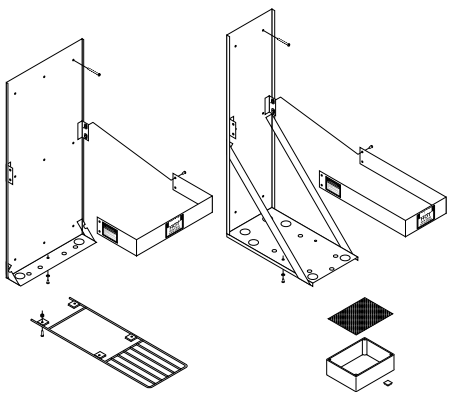

1. **Wall Mount Bracket (side)**
   Product No. : 12542.0000
   Dimensions: 30" H x 131⁄2" W x 41⁄2" D
   76.2 cm H x 34.29 cm W x 11.43 cm D

2. **Wall Mount Bracket (front)**
   Product No. : 13125.0001
   Dimensions: 301⁄2" H x 81⁄2" W x 151⁄4" D
   77.47 cm H x 21.59 cm W x 38.74 cm D

3. **Container Holding Shelf**
   Product No. : 12599.0000
   Dimensions: 63⁄4" W x 21" D
   17.15 cm W x 53.34 cm D

4. **Drip Tray**
   Product No. : 02497.7000

Model	Agency Listing
H5E-DV PC	

Dimensions & Specifications

CANADA


Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	˚F / ˚C Settings	Gal/Hr† cold water input 35˚	Gal/Hr† hot water input 140˚	Cubic Ft³/m³	Weight lbs/kg	Cord Attached
H5E-DV PC	39100.6000	120	12.3	1425	1480	200˚/ 93.3*	3.7/ 14	8.1/ 30.8	4.0/.1132	35/ 15.88	No
		120/240	16.9	4000	4050		7.3/ 27.7	14.7/ 55.8			
H5E-DV PC	39100.6001	120	12.3	1425	1480	90˚/ 32.2*	8.1/ 30.8	n/a	4.0/.1132	35/ 15.88	No
		120/240	16.9	4000	4050		14.7/ 55.8	n/a			

Electrical: 120 Volt setting requires 2-wires plus ground service, single-phase.
120/240 Volt setting requires 3-wires plus ground service, single-phase.
Supplied strain relief on rear side of machine.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" (6.3 mm) OD male flare fitting.

* Adjustable 65˚F (18.3˚C) to 205˚F (96.1˚C).

† Based upon a maximum single dispense of 2 gallons (7.6 liters) per portion.

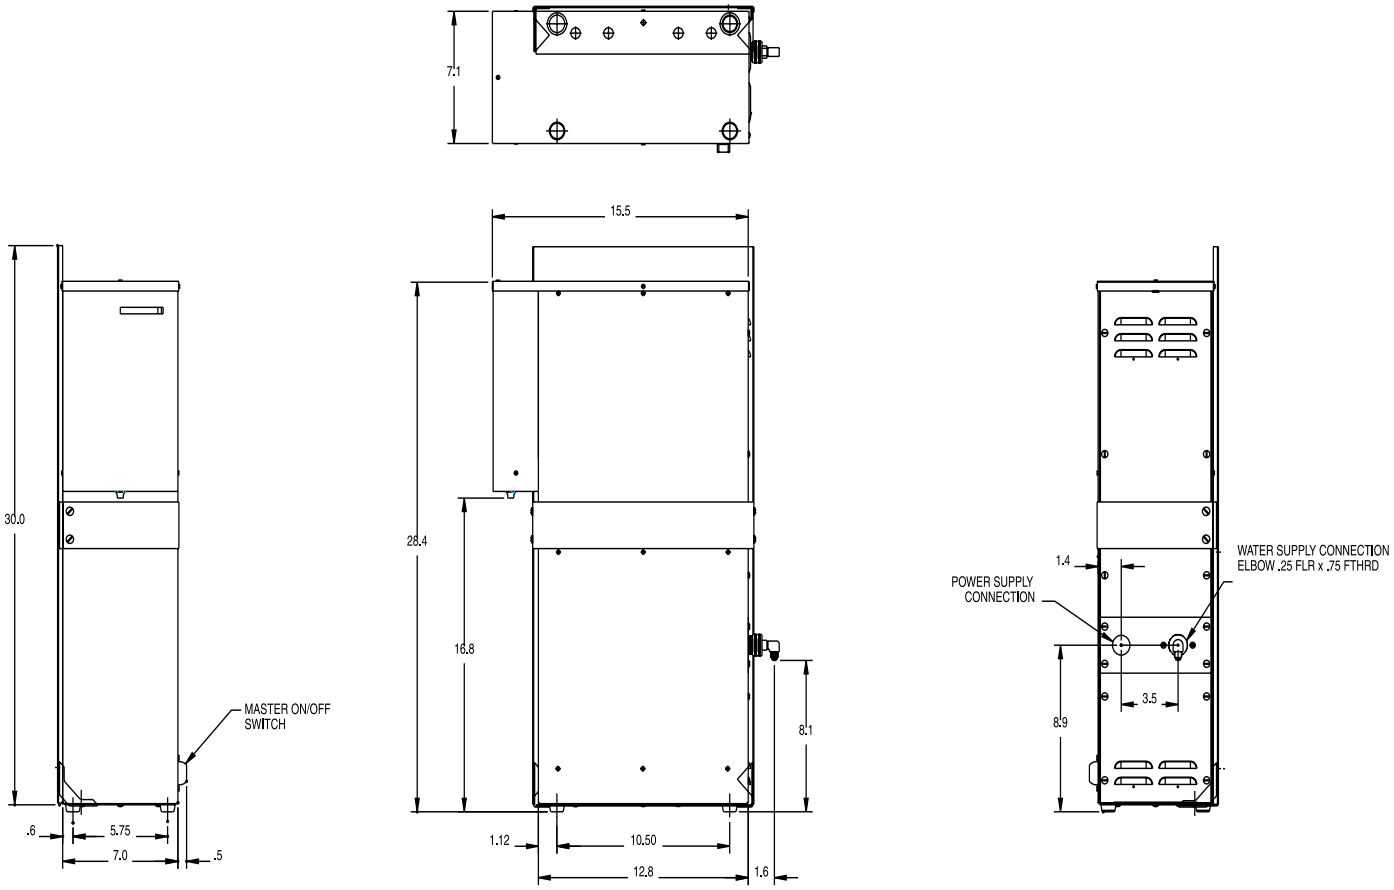

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*