BUNN®

ITEM#

PROJECT

DATE

H5 Element 5 Gallon (18.9 Liter) Hot Water Dispenser



Model H5E/H5X Element
Dimensions: 28.5"H x 7.1"W x 17.5"D
(72.4cm H x 18.03cm W x 44.5cm D)

Features

5 Gallon Hot Water Machine

- Dispenses up to 18 gallons (68.14 litres) of boiling water (H5X) per hour for food prep and cleaning.
- Precise temperature (72º–212ºF) (22.2ºC-100ºC) ensures consistent, high quality results.
- Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff.
- Prepare large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal, and many more foods.
- Temperature displays on front LCD.
- Energy saving night mode reduces tank temperature.


For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004

Easy Clear® EQHP-10L
Product No. : 39000.0001



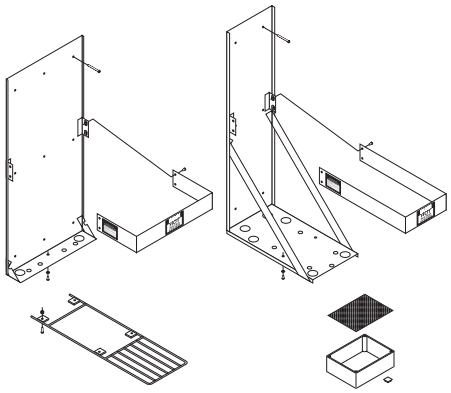

1. **Wall Mount Bracket (side)**
   Product No. : 12542.0000
   Dimensions: 30" H x 131⁄2" W x 41⁄2" D
   76.2 cm H x 34.29 cm W x 11.43 cm D

2. **Wall Mount Bracket (front)**
   Product No. : 13125.0001
   Dimensions: 301⁄2" H x 81⁄2" W x 151⁄4" D
   77.47 cm H x 21.59 cm W x 38.74 cm D

3. **Container Holding Shelf**
   Product No. : 12599.0000
   Dimensions: 63⁄4" W x 21" D
   17.15 cm W x 53.34 cm D

4. **Drip Tray**
   Product No. : 02497.7000

Model	Agency Listing
H5X Element	
H5E Element	


Dimensions & Specifications

CANADA

Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	˚F / ˚C Settings	Gal&L /Hr cold water input 35˚	Gal&L/Hr hot water input 140˚	Cubic ft³/m³	Weight lbs/kg
H5E-ELEMENT	43600.6005	120	12.5	1500	1500	200/93.3	Varies with application		4.1/.116	32/14.5
H5E-ELEMENT	43600.6000	208	19	4000	4000	200/93.3	7.3/ 27.6	14.7/ 55.6	4.1/.116	32/14.5
H5E-ELEMENT	43600.6001	240	16.7	4000	4000	200/93.3	7.3/ 27.6	14.7/ 55.6	4.1/.116	32/14.5
H5E-ELEMENT	43600.6007	208	28.8	6000	6000	200/93.3	9.9/ 37.5	18.6/ 70.4	4.1/.116	32/14.5
H5E-ELEMENT	43600.6009	240	25	6000	6000	200/93.3	9.9/ 37.5	18.6/ 70.4	4.1/.116	32/14.5
Note: H5E-ELEMENT models are adjustable from 72˚F to 205˚F (22˚C to 96˚C)										
H5X-ELEMENT	43600.6006	120	12.5	1500	1500	212/100	3.7/ 14	8.1/ 31	4.1/.116	32/14.5
H5X-ELEMENT	43600.6002	208	19	4000	4000	212/100	7.3/ 27.6	14.7/ 55.6	4.1/.116	32/14.5
H5X-ELEMENT	43600.6003	240	16.7	4000	4000	212/100	7.3/ 27.6	14.7/ 55.6	4.1/.116	32/14.5
H5X-ELEMENT	43600.6008	208	28.8	6000	6000	212/100	9.9/ 37.5	18.6/ 70.4	4.1/.116	32/14.5
H5X-ELEMENT	43600.6010	240	25	6000	6000	212/100	9.9/ 37.5	18.6/ 70.4	4.1/.116	32/14.5

Electrical:All models require 2-wires plus ground service, single-phase. Supplied strain relief on rear side of machine. 120V dispensers are supplied with NEMA 5-15P Plug and Cord.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1⁄4" (6.3 mm) OD male flare fitting.

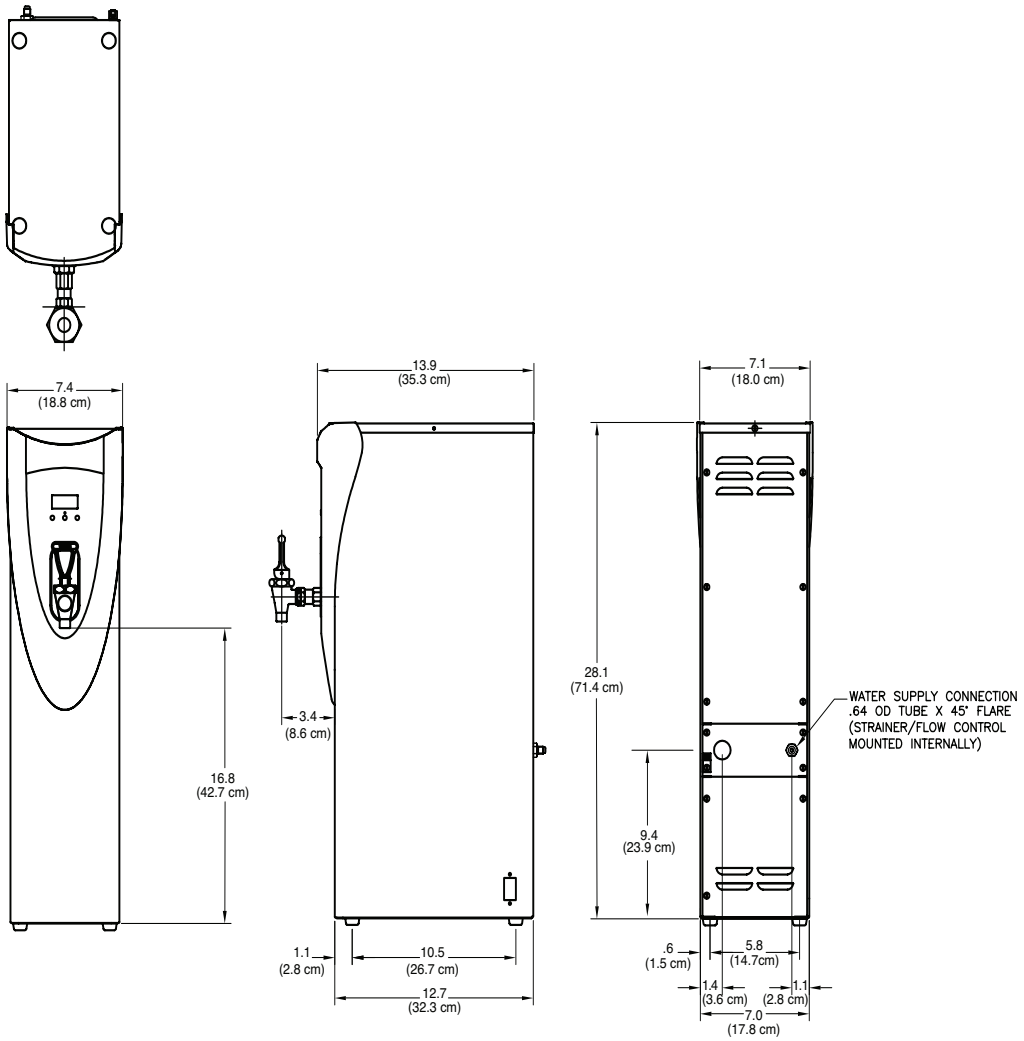

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*