BUNN® INTERNATIONAL

ITEM#

PROJECT

DATE

18.9 Litre (5 Gallon) Element Hot Water Dispenser



H5E/H5X Element
Dimensions: 28.5"H x 7.1"W x 17.5"D
(72.4cm H x 18.03cm W x 44.5cm D)

Features

Providing accuracy, adjustability, energy efficiency and styling to our quality line of hot water equipment

- Digital thermostat provides consistent and accurate temperatures of 15.6°-100°C (60°-212°F).
- New contemporary, space-saving design.
- LED display provides simple temperature adjustment.
- Programmable "Energy Saver Mode" reduces operating cost during idle periods.
- Thinsulate® tank insulation provides increased energy efficiency.
- The perfect tool for added control over quality coffee and tea.



For current specification sheets and other information, go to *www.bunn.com*.


**International models may vary in appearance.*

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004

Easy Clear® EQHP-10L
Product No. : 39000.0001



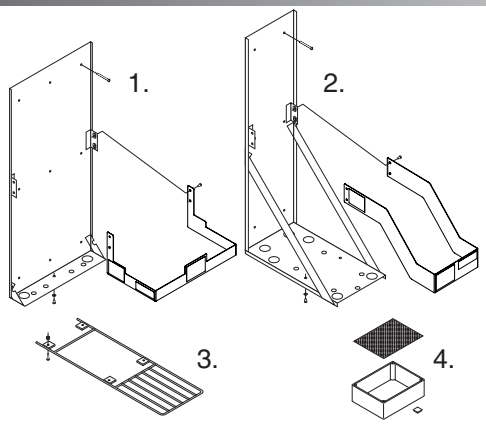

1. **Wall Mount Bracket (side)**
   Product No. : 12542.0005
   Dimensions: 30" H x 13½" W x 4½" D
   76.2 cm H x 34.29 cm W x 11.43 cm D
   Retaining Bracket (side) only
   Product No. : 12549.1001

2. **Wall Mount Bracket (front)**
   Product No. : 13125.0003
   Dimensions: 30½" H x 8½" W x 15¼" D
   77.47 cm H x 21.59 cm W x 38.74 cm D
   Retaining Bracket (front) only
   Product No. : 13127.1001

3. **Container Holding Shelf**
   Product No. : 12599.0000
   Dimensions: 6¾" W x 21" D
   17.15 cm W x 53.34 cm D

4. **Drip Tray**
   Product No. : 02497.0000


Dimensions & Specifications

Model	Product #	Volts	Amps	Total Watts	Temp Settings	Gal./Hr. cold water input 35˚F (1.6˚C)	Gal./Hr. hot water input 140˚F (60˚C)	Shipping Weight	Cord Attached	Agency
H5E Element Specifications:		230	16	3700	93.3˚C (200˚F)	9.4 L (9.1 gal)	94.6 L (25 gal.)	14.5 kg (32 lbs.)	No	CE
H5E Element SST	43600.0012									
H5E Element Red	43600.0016									
H5E Element Copper	43600.0017									
H5E Element Black	43600.0018									
H5E Element White	43600.0019									
H5X Element Specifications:		230	16	3700	100˚C (212˚F)	39.4 L (9.1 gal)	94.6 L (25 gal.)	14.5 kg (32 lbs.)	No	CE
H5X Element SST	43600.0013									
H5X Element Red	43600.0020									
H5X Element Copper	43600.0021									
H5X Element Black	43600.0022									
H5X Element White	43600.0023									

Electrical:Model requires 2-wires plus ground service, rated 220-240V, single-phase, 50/60Hz.
Supplied strain relief on rear side of machine.

Plumbing: 138-621 kPa (20-90 psi). Machine supplied with ¼" OD male flare fitting.

Tank capacity: 18.9 litres (5 gallons).

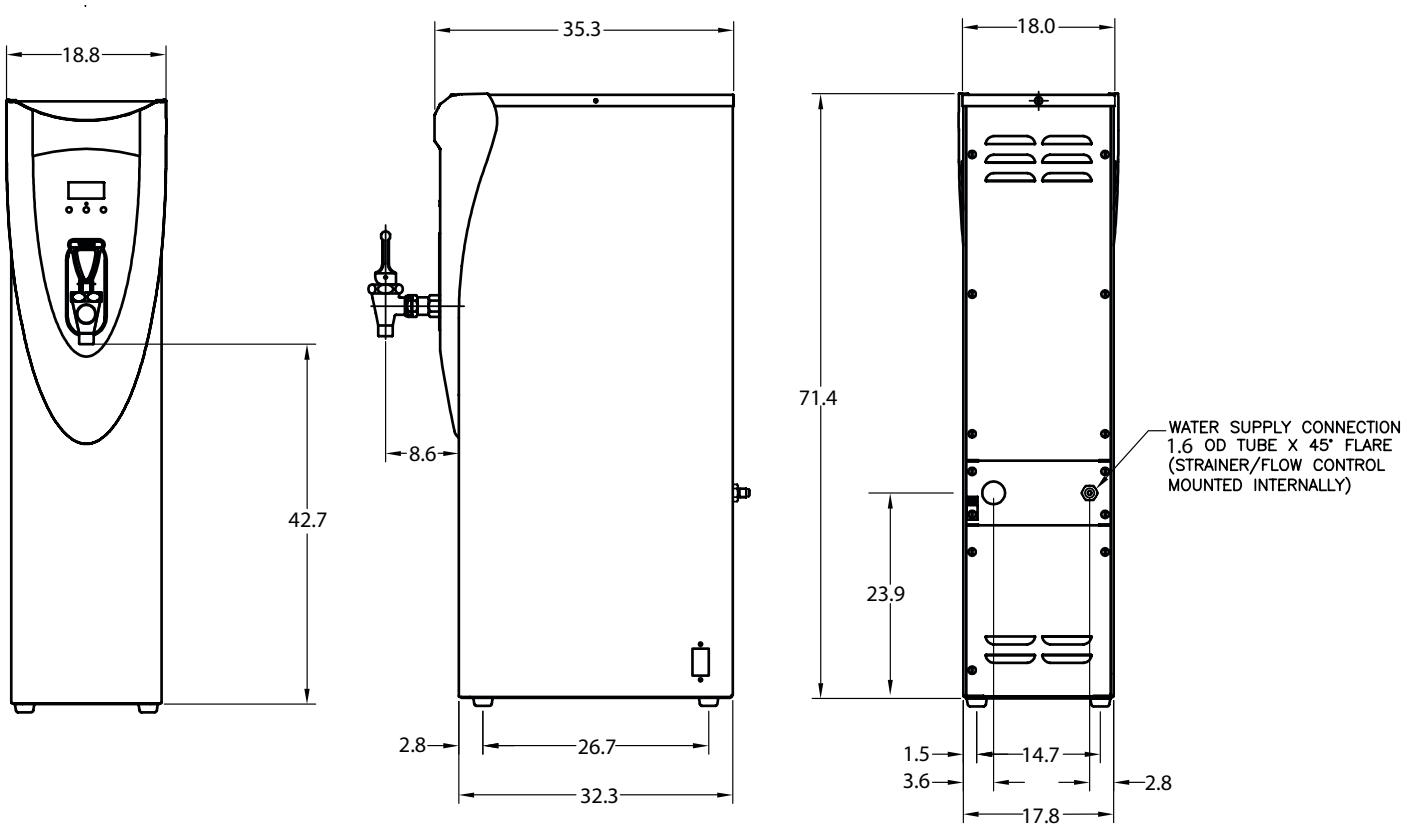

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

8/12 © Bunn-O-Matic Corporation