BUNN®

ITEM#

PROJECT

DATE

5 Gallon Element
Hot Water Dispenser - Custom Colors



H5E/H5X Element - Custom Colors
Dimensions: 28.5"H x 7.1"W x 17.5"D
(72.4cm H x 18.03cm W x 44.5cm D)

Features

Providing accuracy, adjustability, energy efficiency and styling to our quality line of hot water equipment

- Digital thermostat provides consistent and accurate temperatures of 60°-212°F (15.6°-100°C).
- New contemporary, space-saving design.
- LED display provides simple temperature adjustment.
- Programmable "Energy Saver Mode" reduces operating cost during idle periods.
- Thinsulate® tank insulation provides increased energy efficiency.
- The perfect tool for added control over quality coffee and tea.




For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004

Easy Clear® EQHP-10L
Product No. : 39000.0001



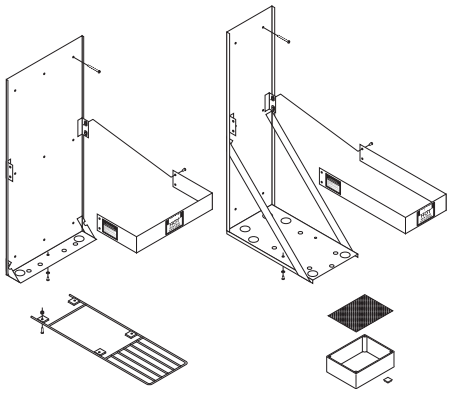

1. **Wall Mount Bracket (side)**
   Product No. : 12542.0000
   Dimensions: 30" H x 131⁄2" W x 41⁄2" D
   76.2 cm H x 34.29 cm W x 11.43 cm D

2. **Wall Mount Bracket (front)**
   Product No. : 13125.0001
   Dimensions: 301⁄2" H x 81⁄2" W x 151⁄4" D
   77.47 cm H x 21.59 cm W x 38.74 cm D

3. **Container Holding Shelf**
   Product No. : 12599.0000
   Dimensions: 63⁄4" W x 21" D
   17.15 cm W x 53.34 cm D


4. **Drip Tray**
   Product No. : 02497.0000


Model	Agency Listing
H5E Element	UL LISTED NSF
H5X Element	UL LISTED NSF

Dimensions & Specifications

Model	Product #	Volts	Amps	Total Watts	˚F Settings	Gal./Hr. cold water input 35˚	Gal./Hr. hot water input 140˚	Cu. Ft.	Shipping Weight	Cord Attached
H5E-40-208 *White*	43600.0007	208	19.5	4050	200	*Varies with application*		4.1 ft^3	32 lbs.	No
H5X-40-208 *White*	43600.0011	208	19.5	4050	212	7.3	14.7	4.1 ft^3	32 lbs.	No
H5E-40-208 *Red*	43600.0004	208	19.5	4050	200	*Varies with application*		4.1 ft^3	32 lbs.	No
H5X-40-208 *Red*	43600.0008	208	19.5	4050	212	7.3	14.7	4.1 ft^3	32 lbs.	No
H5E-40-208 *Copper*	43600.0005	208	19.5	4050	200	*Varies with application*		4.1 ft^3	32 lbs.	No
H5X-40-208 *Copper*	43600.0009	208	19.5	4050	212	7.3	14.7	4.1 ft^3	32 lbs.	No
H5E-40-208 *Black*	43600.0006	208	19.5	4050	200	*Varies with application*		4.1 ft^3	32 lbs.	No
H5X-40-208 *Black*	43600.0010	208	19.5	4050	212	7.3	14.7	4.1 ft^3	32 lbs.	No

Electrical: All models require 2-wires plus ground service, 208V, single-phase, 60Hz.
Supplied strain relief on rear side of machine.
Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" OD male flare fitting.

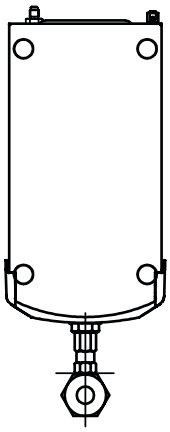

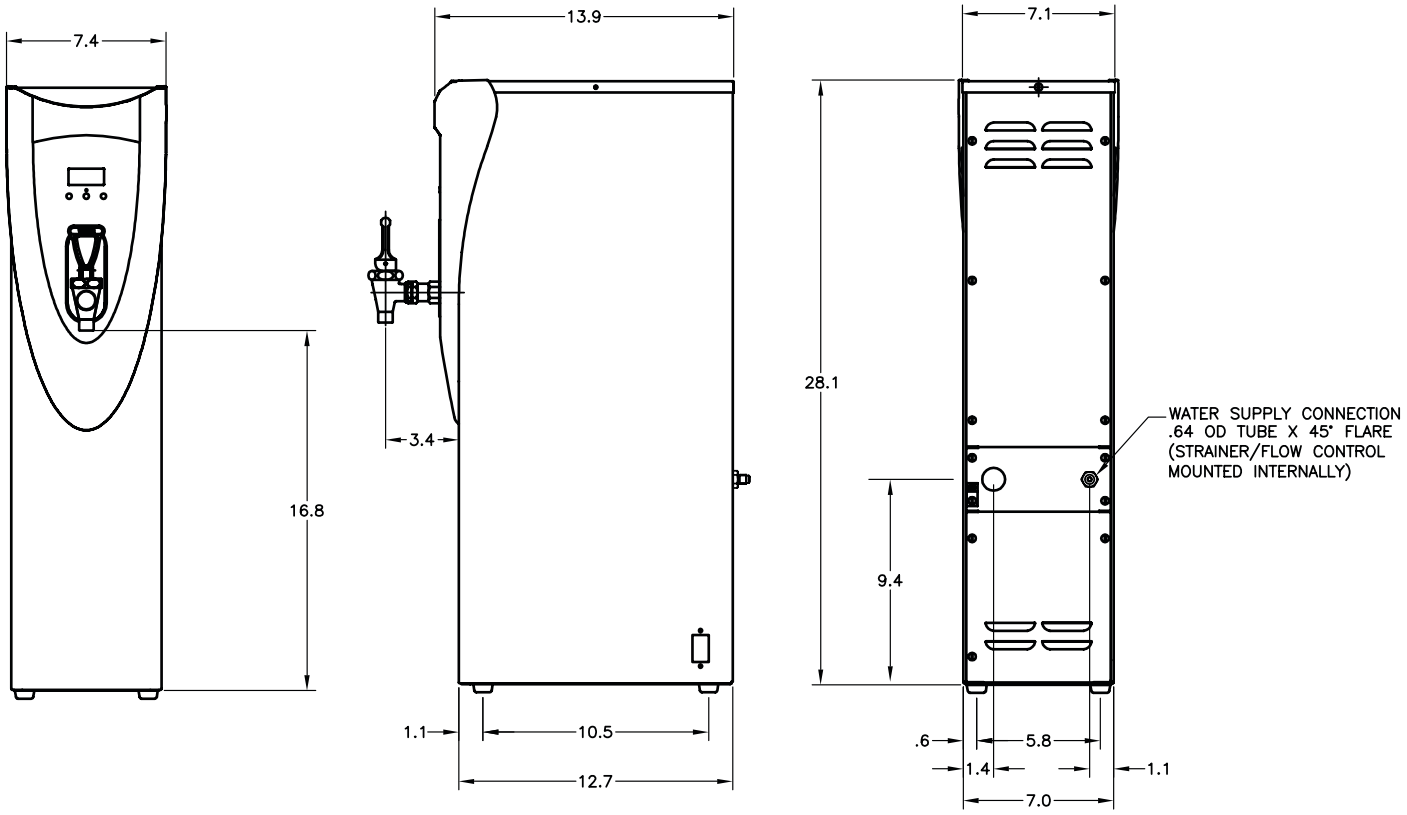

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

1/12 © Bunn-O-Matic Corporation