



TRIPLE DOOR PROOFER



Proofer Cabinet, Roll-In, Three Section Cavity, Designed in Single Rack, Double Rack, and Shelving Configurations, Solid State Heat & Humidity Controls, Auto Water Entry, Full View Glass Door, Stainless Steel Interior and Exterior, Aluminum Floor, NSF, cETLus, ETL



PROJECT _____
 ITEM NO. _____
 NOTES _____
 MODEL NUMBER: **E336, E336R, E336TLO**



*rack not included

FEATURES

- Even Airflow Heating System Maintains the Right Combination of Heat and Humidity for Optimal Proofing
- Proofs from Room Temperature up to 110°F (43°C)
- Relative Humidity up to 95%
- Automatic Water Fill System (no water pans required)
- Manual Controls
- Independent Controls for Heat, Humidity and Timer

CONSTRUCTION

- Stainless Steel Construction
- Aluminum Flush Floor Entry
- Ships in One Piece

CLEARANCES

Minimum Clearance from Combustible Materials:


- 4" (102mm) Sides & Back
- 24" (609mm) Top

OPTIONS & ACCESSORIES

- Stainless Steel Door (suffix SD)
- Door Bumpers (suffix DB)
- Prison Package (suffix PPE)
- Water Filter (PLF240) (recommended)
- Additional Side Shelves (E336R only)

WARRANTY

- One Year Labor & Two Year Parts

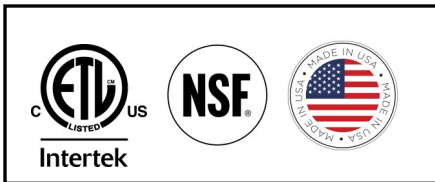


| Model | Crated Weight | Overall Dimensions | | | | Rack Capacity | Door Opening | |
|---------|---------------|--------------------|----------------|------------|------------|-----------------------------|---------------|----------------|
| | | W | D | H | B | | L | H |
| E336 | 1330 (604) | 97 3/4" (2483) | 40 1/2" (1029) | 84" (2134) | 36" (914) | 2 + 10 shelves (3 racks) | 27" (686) | 73 1/2" (1867) |
| E336R | 1230 (558) | 97 3/4" (2483) | 40 1/2" (1029) | 84" (2134) | 36" (914) | 3 | 27" (686) | 73 1/2" (1867) |
| E336TLO | 1350 (613) | 116 1/2" (2959) | 48 1/2" (1029) | 84" (2134) | 44" (1118) | 6 single 3 double | 32 1/2" (826) | 73 1/2" (1867) |





PROJECT _____
 ITEM NO. _____
 NOTES _____
 MODEL NUMBER: **E336, E336R, E336TLO**

DRAWINGS

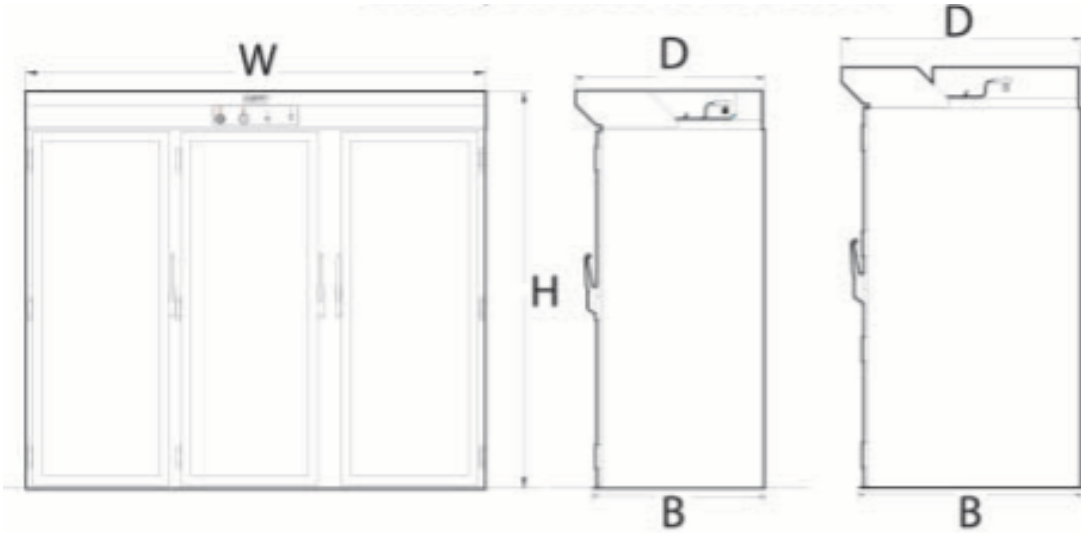

| Model | Water Inlet | Electrical System* | | | |
|---------|-------------|--------------------|--------|------|------|
| | | Volts | Phases | Amps | kW |
| E336 | 1/4" (6) | 120/208 | 1 | 35 | 7.5 |
| | | 120/240 | 1 | 31 | 7.5 |
| E336R | 1/4" (6) | 120/208 | 1 | 35 | 7.5 |
| | | 120/240 | 1 | 31 | 7.5 |
| E336TLO | 1/4" (6) | 120/208 | 1 | 71 | 14.5 |
| | | 120/240 | 1 | 62 | 14.5 |

*GROUND WIRE NOT INCLUDED

