

Merchandisers Refrigerators & Freezers

Swing Door

- FM-10
- FMD-23
- FM-16F
- FM-16
- FMD-49
- FMD-23F



Standard Features

- Glass Door Merchandisers are designed with quality and durability that you will not find in any other products in its class.
- **No-chip exterior**, durable and stylish black vinyl finish.
- Solid and easy to clean interior, NSF-7 approved white coated steel. Stainless Steel floor.
- Electronic controller ensures temperature precision.
- “Low-E” consumption **LED interior lighting** provides greater visibility, shadow-free illumination and enhanced product display.
- Factory balanced and environmentally friendly refrigeration system: R-134A (refrigerators) and R-404A (freezers).
- Self-closing doors with magnetic gaskets and positive seal.
- On & Off door rocker switch, reduces the amount of moisture going inside the unit and helps to preserve temperature inside the cabinet.
- High density, CFC-Free polyurethane insulation. Entire cabinet is foamed in place including mullions on double doors to prevent condensation and optimize efficiency.
- “Low-E” double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency and durability.
- High/low temperature alarm and automatic defrost.
- Adjustable epoxy coated wire shelves (four standard).
- Service friendly, bottom mounted compressor.
- Illuminated exterior sign panel (FMD models).

NEW

Item # _____



FM-10



FM-16(F)



FMD-49



FMD-23(F)



Options & Accessories

- Epoxy coated shelves
- 220 volts / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards

| Model | Door | Capacity (Cu.Ft) | Shelves | Amps | HP | Voltage | Nema Plug | Cord Length | Cabinet Dimensions | | | Shipping | |
|---------------------------------|------|---------------------|---------|------|-----|---------|-----------|-------------|--------------------|---------------------|----------------------|-------------------|------------------------------|
| | | | | | | | | | L | D | H | Wt. | Cubes |
| Swing Door Refrigerators | | | | | | | | | | | | | |
| FM-10 | 2 | 10 | 4 | 5.1 | 1/4 | 115 | 5-15P | 8' | 36" (914 mm) | 21 3/4" (554 mm) | 54" (1.373 mm) | 203 (92 kg) | 30 (0.84 m ³) |
| FM-16 | 1 | 16 | 4 | 5.8 | 1/4 | 115 | 5-15P | 8' | 27" (686 mm) | 28" (711 mm) | 72 5/8" (1846 mm) | 216 (98 kg) | 37 (1.04 m ³) |
| FMD-23 | 1 | 23 | 4 | 6.1 | 1/4 | 115 | 5-15P | 8' | 27" (686 mm) | 33 1/2" (851 mm) | 78 5/8" (1998 mm) | 262 (118.5 kg) | 47 (1.31 m ³) |
| FMD-49 | 2 | 49 | 8 | 6.9 | 1/3 | 115 | 5-15P | 8' | 54" (1372 mm) | 33 1/2" (851 mm) | 78 5/8" (1998 mm) | 424 (192 kg) | 93 (2.62 m ³) |
| Swing Door Freezers | | | | | | | | | | | | | |
| FM-16F | 1 | 16 | 4 | 8.5 | 3/4 | 115 | 5-15P | 8' | 27" (686 mm) | 28" (711 mm) | 72 5/8" (1846 mm) | 216 (98 kg) | 37 (1.04 m ³) |
| FMD-23F | 1 | 23 | 4 | 8.8 | 3/4 | 115 | 5-15P | 8' | 27" (686 mm) | 33 1/2" (851 mm) | 78 5/8" (1998 mm) | 262 (118.5 kg) | 47 (1.31 m ³) |

*All specifications are subject to change without notice.

Specifications Merchandisers

Construction

Exterior made of durable and stylish black vinyl on steel, non-chip or peel. White coated steel interior, NSF approved with high quality stainless steel floor. High density and environmentally friendly CFC-Free polyurethane insulation.

Entire cabinet is foamed in place including mullions on double doors. Double pane thermal insulated glass door on refrigerators and triple pane on freezers with extruded aluminum frames for the best efficiency. Self-closing doors with magnetic gaskets, positive seal closure system and aluminum handles. On & Off door rocker switch.

Low energy consumption LED interior lighting. All units have full height LED lighting along the

door frame including a safety shield per section outside the food zone. Illuminated exterior sign panel (FMD models).

Refrigeration System

Factory oversized and balanced refrigeration system, using environmentally friendly, CFC Free refrigerant: R-134A (refrigerators) / R-404A (freezers). Bottom mounted condensing unit on a rail system for easy access. Evaporator coil is mounted to interior top panel. Large fan motor and fan blades for better air flow. Refrigerators are designed to maintain temperatures between 33° F to 38°F and freezers maintains an optimal temperature of -7°F.

Precise electronic controller. Automatic defrost and temperature door alarm.

Shelving


Four epoxy white coated wire shelves standard per door with channel slides for supports. Adjustable in 1/2" increments per shelf. Aluminum pilasters and stainless steel clips.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p).

Warranty

2 year parts and labor warranty plus 3 additional year compressor warranty. (Continental U.S.A. & Canada only).

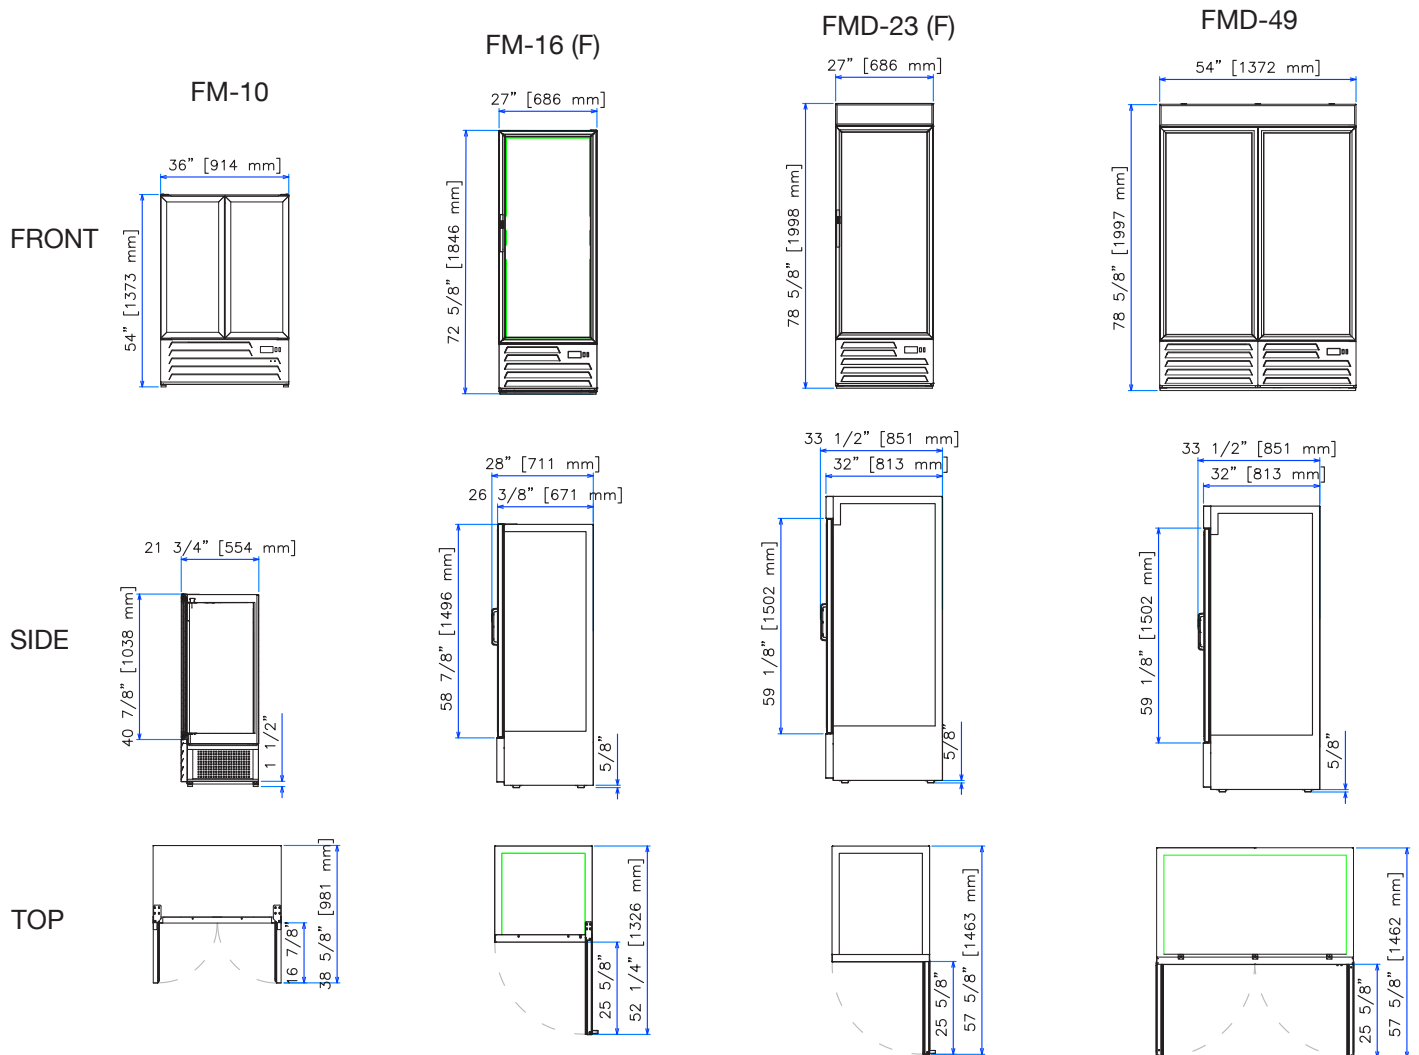

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 04/2013