

ITEM:	PROJECT NAME:	DATE:

# CURVED GLASS HORIZONTAL DUAL ZONE CASE

	CGR3660DZH
	CGR5060DZH
	CGR5960DZH
٦	CGR7760DZH



Sleek curved-glass styling blends with traditional design elements to maximize performance.

Cases are available in lengths of 36", 50", 59", and 77".

## **STANDARD FEATURES**

- Curved glass styling.
- Bottom section refrigerated, top section non-refrigerated.
- Adjustable white wire shelves. Shelves are adjustable up and down and can also be tilted in two positions.
- Shielded top light and shelf lights.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Steel base construction with a choice of six standard laminates on base. Other finishes optional.
- Black trim.
- White scratch-resistant display decks.
- UL Safety and UL Sanitation Listed.

## Added Features for Refrigerated Side

- Condenser air filter on self-contained units.
- Thermometer.
- Condensate evaporator provided for a totally self-contained system.
- Oversized coil and low-velocity fan system maintains high humidity and product freshness.
- Easy clean, rustproof insulated evaporator coil compartment.
- Adjustable temperature control.
- Average case temperature of 38° to 40° is maintained.
- Rear access of the refrigeration system for quick and easy service.
- 134A Refrigerant.

## **CURVED GLASS HORIZONTAL DUAL ZONE CASE**


#### **OPTIONAL ACCESSORIES:**

- ☐ Special Base Finish
- ☐ Glass Shelves
- ☐ Rear Wrapping Board
- ☐ Cord & Plug

(NEMA 5-I5P/77" 5-20P)

- ☐ Remote Condensing Unit
- ☐ Black, Gold, or Chrome Wire Shelves
- ☐ Reflective Ends
- ☐ White or Mirrored Interior Ends

- ☐ Reflective Rear Doors
- ☐ Casters/Cord & Plug Included (Self-Contained Models Only)
- □ Legs
- ☐ Package Shelf
- ☐ Light Below Package Shelf

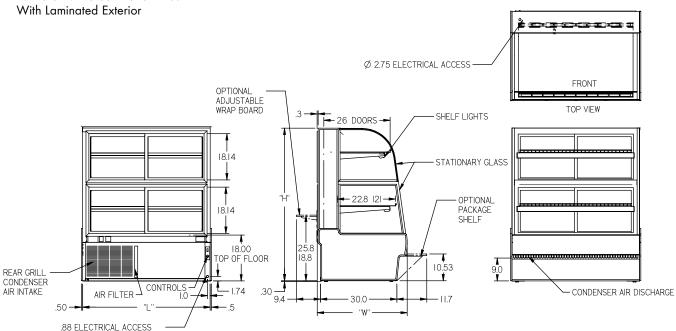

### **SPECIFICATIONS:**

IOPTIONAL CORD LOCATION

Model	Dimensions L W H	Self-Contained 120/60/1	Remote 120/60/1
☐ CGR3660DZH	36.13" x 35.31" x 60"	1/3 HP • 9.0 AMPS	2.3 AMPS
☐ CGR5060DZH	50.13" x 35.31" x 60"	1/2 HP • 10.5 AMPS	2.3 AMPS
☐ CGR5960DZH	59.13" x 35.31" x 60"	1/2 HP • 12.0 AMPS	2.5 AMPS
☐ CGR7760DZH	77.13" x 35.31" x 60"	3/4 HP • 15.4 AMPS	3.3 AMPS

- Refrigerated cases are designed to operate in a maximum environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.







#### **FEDERAL INDUSTRIES**

A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206 EMAIL: geninfo@federalind.com FAX: 608-424-3234 WEBSITE: www.federalind.com

