FEDERAL

a Standex company

ITEM: _____ PROJECT NAME: _____ DATE: _____

HIGH VOLUME
RED MEAT & DELI MAXI CASE

MODEL

- ☐ MSG-454-DM
- ☐ MSG-654-DM
- ☐ MSG-854-DM
- ☐ MSG-1054-DM



The Red Meat Maxi Case delivers full size capacity with presentation and value in mind. Cases available in lengths of 4', 6', 8' and 10'. Designed for continuous line-ups.


STANDARD FEATURES

- Lift-up, pneumatic, cylinder-assisted, tempered thermopane straight front glass.
- Tempered end glass and rear doors.
- Stainless steel deck.
- Fold-down rear wrapping board.
- Coated evaporator coil(s).
- Adjustable temperature control.
- Accepts full-size deli risers and meat trays.
- Thermometer.
- Self-contained with condensate evaporator pan/ Remote refrigeration available.
- Double-duty bottom refrigerated pull-out storage drawers. 4' has one drawer, 6' and 8' have two drawers, 10' has three drawers.
- Stainless steel exterior finish/Laminated finishes available.
- Gravity coil.
- UL Safety and UL Sanitation Listed.
- Decorative end panels and front bumper rail available in white, black, gray and green.
- Designed for continuous case line-ups.
- Appliance receptacle provided on back.


HIGH VOLUME RED MEAT & DELI MAXI CASE

OPTIONAL ACCESSORIES:

- ☐ Special Color Laminated Base
- ☐ Lighted Mezzanine Shelf
- ☐ Paper Roll Cutter/Holder
- ☐ Reflective Ends
- ☐ Reflective Doors
- ☐ Remote Refrigeration
- ☐ Scale Stand
- ☐ Slicer Stand
- ☐ Deli Step Pan Holder or Risers
- ☐ Promolux Lighting
- ☐ LED Lighting
- ☐ Cord & Plug (Self-Contained Models Only, NEMA 5-20P)

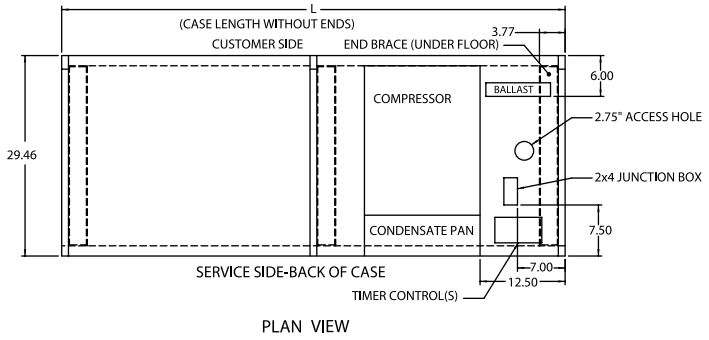


PLAN VIEW

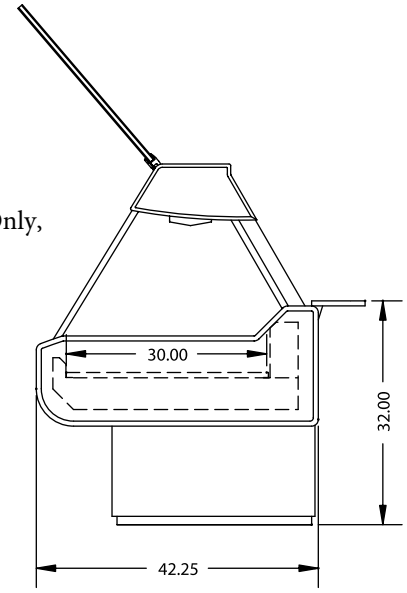

END VIEW

MSG-654-DM SHOWN

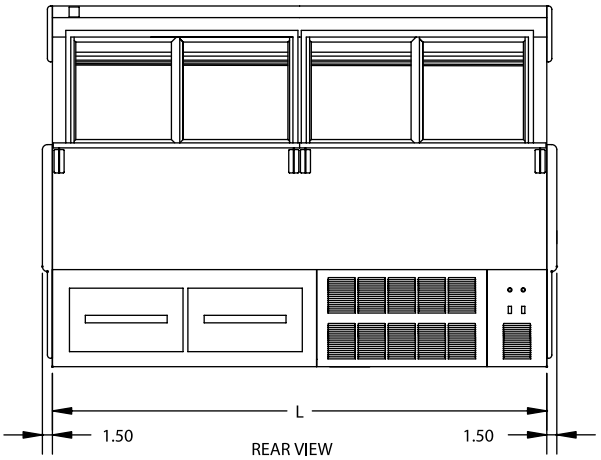

REAR VIEW

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	*Self-Contained 120/60/1	*Remote 120/60/1
MSG-454-DM	50" x 42 1/4" x 54"	730	3/4 HP - 15.4 AMPS	10.4 AMPS
MSG-654-DM	74" x 42 1/4" x 54"	930	3/4 HP - 15.6 AMPS	10.6 AMPS
MSG-854-DM	98" x 42 1/4" x 54"	1,210	3/4 HP - 15.8 AMPS	10.8 AMPS
MSG-1054-DM	122" x 42 1/4" x 54"	1,530	3/4 HP - 16.0 AMPS	11.0 AMPS

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Includes general purpose receptacle 120V, 3 AMP.
- Refrigerated cases are designed to operate in a maximum environment of 75° ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.

Look to Federal for Innovative Merchandising

FEDERAL
The Signature of Quality®

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201
PHONE: 800-356-4206 **FAX: 608-424-3234**
EMAIL: geninfo@federalind.com **WEBSITE: www.federalind.com**