


SURFACE UTILITY

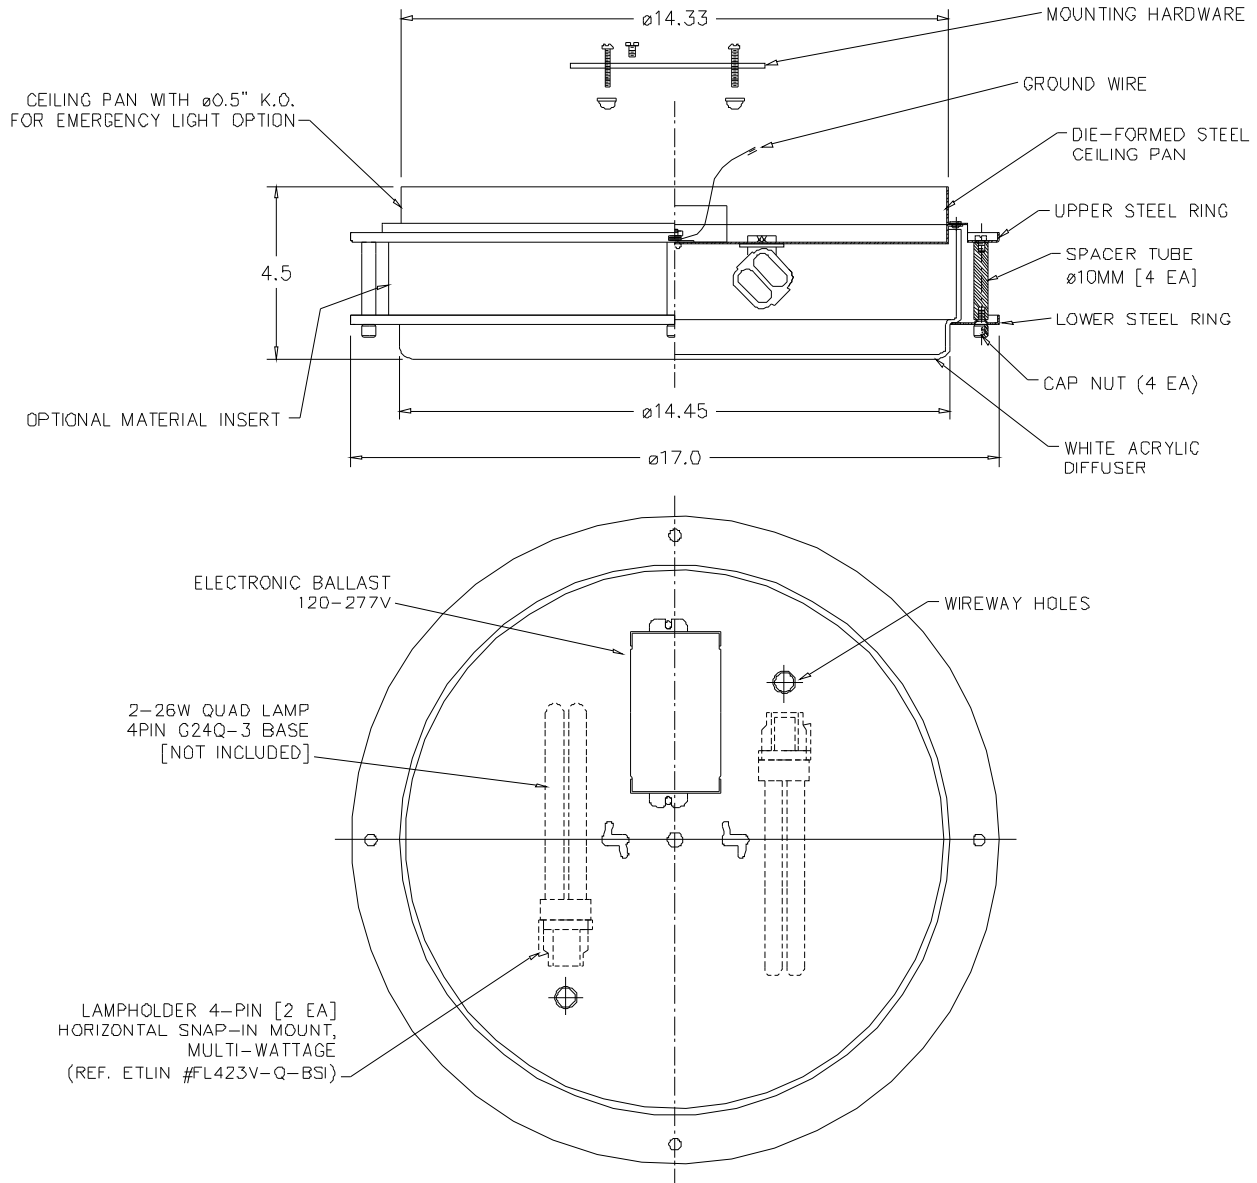

CONSTRUCTION: Steel Pan, Etched White Acrylic diffuser

ELECTRICAL: Electronic 120/ 277V ballast standard. Uses 2- 26W G24q-3 CFL lamps
UL Approved for damp location use

FINISHES: Satin Nickel

MOUNTING: Mounts to octagon junction box or 4x4 junction box with round plaster adapter

OPTIONS: Dimming and emergency battery available, consult factory. Fixture accepts optional fabric bands. Consult catalog or website for fabric options and ordering information.
Fabric bands are field installed