



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model #: \_\_\_\_\_

**MODEL: ERC 180** **MERCHANDISERS:**



ERC 180

**General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Trays	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
ERC 180	73-3/8	32-1/2	78-1/2	3	12	R404a	1.41	33°F/38°F	57	1	18.6	822
	1865	826	2000									

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
 3325 N.W. 70th Avenue  
 Miami, FL 33122-1332  
 1.305.777.9599 Office  
 1.305.777.9598 Fax

**www.infrico.us**  
 operations@infrico.com  
 service@infrico.com  
 sales@infrico.com

**APPROVALS: AVAILABLE AT:**

Revision: 03 Date: 10/08/2013



Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
Model #: \_\_\_\_\_

**MODEL: ERC 180** **MERCHANDISERS:**

**STANDARD FEATURES**

➤ **Exterior**

- White laminated steel.

➤ **Interior**

- White laminated steel.
- LED lighting.
- Internal drain.

➤ **Insulation**

- High density CFC free Polyurethane foam.

➤ **Doors**

- Sliding doors with self-closing device.
- Thermopane double glass.
- Display area: 52"x20-1/2" (1320x520 mm).

➤ **Shelving**

- (4) White laminated steel per door.
- Dimensions: 34-3/8"x20-1/2" (873x520 mm).

➤ **Refrigeration**

- Temperature and defrost regulated by a digital controller.
- Ventilated condensation system.
- Evaporative pan-stainless steel.

➤ **Electrical**


- Cord and NEMA 5-20P plug. 
- Electrical connection is 115V / 1ph / 60 Hz.

➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**


**OPTIONAL FEATURES**

- ✓ Customizable Product.
- ✓ Set of 4" diameter casters. Locks provided on front set.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).


**PLAN VIEW**

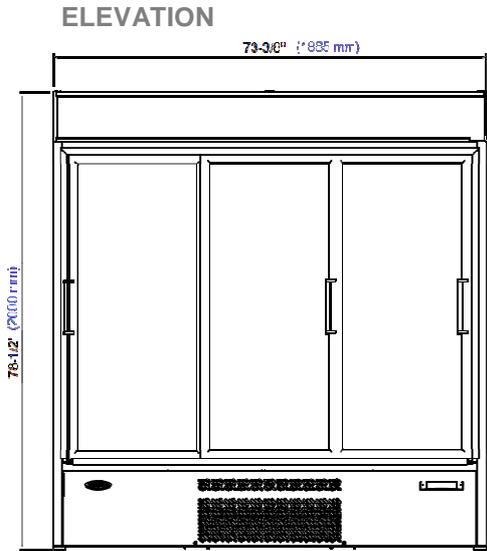

**RIGHT VIEW**

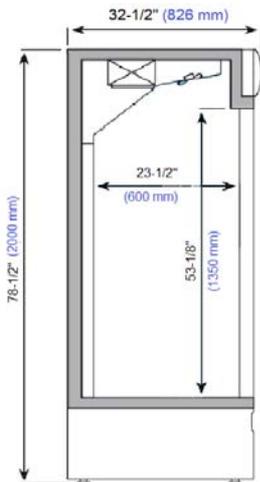

**PLAN VIEW**

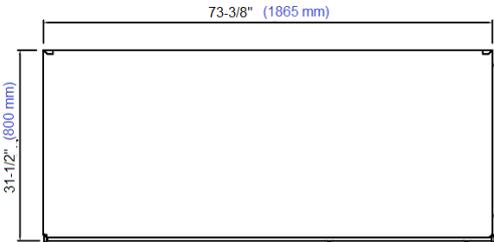

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Revision: 03 Date: 10/08/2013



**Infrico USA Corp.**  
3325 N.W. 70th Avenue  
Miami, FL 33122-1332  
1.305.777.9599 Office  
1.305.777.9598 Fax

**www.infrico.us**  
operations@infrico.com  
service@infrico.com  
sales@infrico.com

**APPROVALS: AVAILABLE AT:**