



Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: MR 67 BT **DEEP UNDERCOUNTER:**
Undercounter Freezers



MR 67 BT

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors & Drawers.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.

- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

| MODEL | Dimensions (inches) (mm) | | | Nº Doors | Nº Shelves | Ref. | Ref. Weight (Lbs.) (gr.) | Temp. Range (°F) (°C) | Capacity (Cu. Ft.) (L) | Cond. Unit. H.P. | Case Amps 115 V. | Crated Weight (Lbs.) (Kg.) |
|----------|--------------------------|---------------|---------------|----------|------------|-------|--------------------------|-----------------------|------------------------|------------------|------------------|----------------------------|
| | W | D | H | | | | | | | | | |
| MR 67 BT | 67-3/8 1710 | 32-5/8 830 | 33-1/8 840 | 2 | 4 | R404a | 0.99 450 | 0°F -18°C | 17 480 | 5/8 | 11.2 | 463 210 |

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 3325 N.W. 70th Avenue
 Miami, FL 33122-1332
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
operations@infrico.com
service@infrico.com
sales@infrico.com

APPROVALS: AVAILABLE AT:

Revision: 03 Date: 10/03/2013



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: MR 67 BT **DEEP UNDERCOUNTER:**
Undercounter Freezers

STANDARD FEATURES

➤ **Exterior**

- AISI 304 Stainless Steel Top.
- Front and sides AISI 430 Stainless Steel.
- Completely injected compact structure.

➤ **Interior**

- AISI 430 Stainless Steel.
- Wide rounded corners to aid cleaning.
- Internal drain.

➤ **Insulation**

- High density CFC free Polyurethane foam.

➤ **Doors**

- Self-closing with stay open feature.
- Integrated door handles.
- AISI 430 Stainless Steel covered hinges.
- Triple chamber snap-in door gaskets for easy removal.
- **Heated door frames to avoid accumulation of ice.**
- Door lock provided.
- Field Reversible.
- Door opening: WxH= 22-7/8"x20-5/8" (580x525 mm).

➤ **Shelving**

- Plastic coated wire shelves and shelf brackets.
- Easy removable for cleaning.
- (2) shelves per door and a set of rails per shelf included.
- Dimensions WxD: 20-7/8"x25-5/8" (GN 2/1) (530x650 mm).
- Compatible with 18"x26" (457x660 mm). sheet pans.

➤ **Casters**

- 4" diameter casters.
- Locks provided on front set.

➤ **Refrigeration**


- Temperature and defrost regulated by a digital controller.
- Evaporative pan – Stainless Steel.
- Evaporator coil coated with anti-corrosion material.
- *INFRICOOL®* ventilation system – front intake and discharge.
- Low temp with expansion valve and hot gas defrost system.
- Slide out condensing unit for easy maintenance.

OPTIONAL FEATURES


- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Stainless Steel wire shelf.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).
- ✓ Single Overshelves kit.
- ✓ Double Overshelves kit.
- ✓ Back Splash – Worktop.



ELEVATION

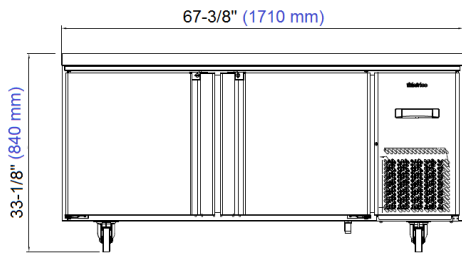

➤ **Electrical**

- Cord and NEMA 5-20P plug. 
- Electrical connection is 115V / 1ph / 60 Hz.




➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW

RIGHT VIEW

PLAN VIEW

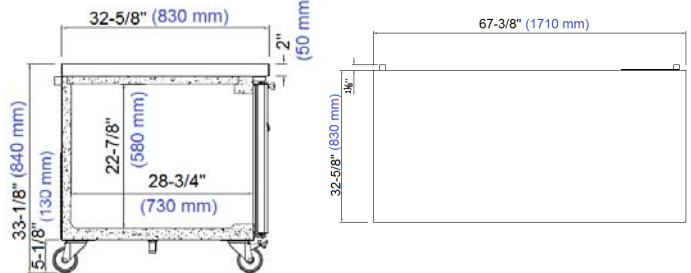

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
3325 N.W. 70th Avenue
Miami, FL 33122-1332
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
operations@infrico.com
service@infrico.com
sales@infrico.com

APPROVALS: AVAILABLE AT:

Revision: 03 Date: 10/03/2013