

Insulated Multi-Functional Cookers

**Gas Fired,
Insulated for Safety™
10° Tilting, Leg Mounted
Made in USA**

**Skittle®
Model SKG**

Standard Features



**Model SKG15-9
(with optional food pans)**

- ◆ 304 stainless food contact zone with:
 - ◇ 304 stainless 1 ½" compression draw-off
- ◆ 304 stainless seam welded pan body with:
 - ◇ 10° tilting pan, 31" working height
 - ◇ Food pan holder under draw-off (except SKG5)
 - ◇ Insulated sides and bottom
 - ◇ Tapered access rim
 - ◇ Electronic Ignition
 - ◇ 120V, single phase (1Ø) standard
- ◆ Adjustable thermostat (175°F to 400°F)
- ◆ High limit safety thermostat
- ◆ Patented 304 stainless seam welded Capsule Lid with:
 - ◇ Variable position, actuator-assisted opening
 - ◇ Insulated sides & top
 - ◇ Adjustable steam vent
 - ◇ 304 stainless safety handle
 - ◇ "L" Lid condensate containment
- ◆ Cassette rack(s) for 12x20 food pans
- ◆ 304 stainless, seam welded component enclosure
- ◆ 304 stainless, seam welded tubular frame construction
- ◆ Single ball valve with 48" s/s flexible spray hose assembly

Legion equipment is built to comply with applicable standards for manufacturers. Approval agencies may include ASME, NSF, UL, ETL, AGA, CSA, CGA, and others. Legion reserves the right of design improvement or modification as warranted. U.S. Patent Nos. 5,553,531, 5,964,145 & Des. 371,715.

Models and Capacities

Model	2.5" Insert Pans	Cooking Baskets	Griddle Area (in. ²)	Kettle (Gals.)	Frying Oil (lbs.)	Oven Volume (ft. ³)
SKG5-5	5	4	351	7.6	35	3.9
SKG5-7	5	4	351	10.6	35	4.3
SKG5-9	5	4	351	13.7	35	4.7
SKG10-5	10	8	703	15.2	70	7.7
SKG10-7	10	8	703	21.3	70	8.5
SKG10-9	10	8	703	27.4	70	9.4
SKG10-11	10	8	703	33.5	70	10.2
SKG15-5	15	12	1029	22.3	105	11.3
SKG15-7	15	12	1029	31.2	105	12.5
SKG15-9	15	12	1029	40.1	105	13.7
SKG15-11	15	12	1029	49.0	105	14.9

Select draw-off valve: ☐ 1.5" ☐ 2" ☐ 3"

With: ☐ compression ☐ ball type fitting

See price list for other draw-off options.

Select Voltage: ☐ 120V ☐ 208V ☐ 240V

Select Gas: ☐ Natural ☐ Propane (LP) ☐ Other

Optional Features and Accessories

See price list for supplemental information regarding options

Faucet Options:

☐ Single ball valve mounted to frame with 48" vinyl flexible spray hose assembly

☐ 48" flexible spray hose assembly (vinyl or stainless) for use with dual or single fill faucet

☐ Automatic water filling meter

(Call for information regarding additional faucet options)

Prison/Security Options:

☐ Fasteners (screws & nuts)

☐ Nut driver tool

☐ Draw-off nut driver tool

☐ Screw driver tool

☐ Lockable control cover

☐ Draw-off protection

Other Options:

☐ Electric timer with buzzer

☐ Knockdown capability for 26" x 66" opening (shipped assembled)

☐ Gas quick disconnect 3/4"

☐ Flexible gas hose 3/4" x 60"

Accessories:

☐ Perforated cooking/steaming basket (11" x 20½" x 5")

☐ Perforated or solid 12 x 20 food pans, 2½, 4 or 6 inch deep

☐ Draw-off drain spout

☐ Draw-off strainer

☐ Draw-off drain hose

☐ #10 Can holder for draw-off

☐ Flat bottom scoop

☐ Fry scoop

☐ Skittle care kit



LEGION Legion Industries, Inc.
(706) 554-4411 Fax: (706) 554-2035


P.O. Office Box 728 Waynesboro, GA 30830 (800) 887-1988
www.legionindustries.com sales@legionindustries.com

Skittle® Model SKG

Gas-Fired,
Insulated for Safety™
10° Tilting, Leg Mounted
Made in USA

Insulated Multi- Functional Cookers

DRAWING REPRESENTS MODEL SKG10-7 WITH 1 1/2" DRAW-OFF

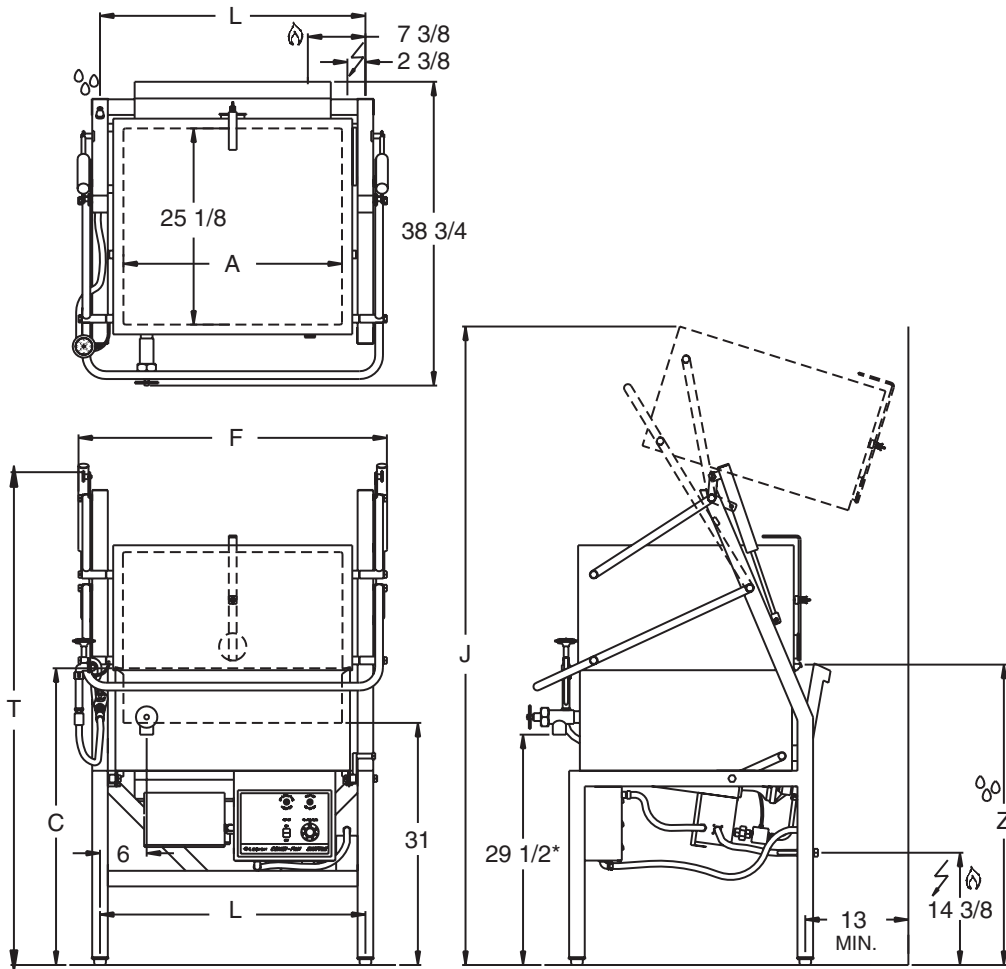

SKITTLE® DIMENSIONS

Model*	A	F	L	Model*	A	F	L	Model*	A	F	L	Depth	C	J	T	Z
SKG5-5	14.0	25.5	20.0	SKG10-5	28.0	39.5	34.0	SKG15-5	41.0	52.5	47.0	5	36.0	79.8	61.1	36.3
SKG5-7	14.0	25.5	20.0	SKG10-7	28.0	39.5	34.0	SKG15-7	41.0	52.5	47.0	7	38.0	81.8	63.1	38.3
SKG5-9	14.0	25.5	20.0	SKG10-9	28.0	39.5	34.0	SKG15-9	41.0	52.5	47.0	9	40.0	83.8	65.1	40.3
N/A				SKG10-11**	28.0	39.5	34.0	SKG15-11**	41.0	52.5	47.0	11	42.0	85.8	67.1	42.3

*Dimensions on these drawings are applicable only when using a 1.5" diameter draw-off valve. If a 2" or 3" diameter draw-off valve is required, contact Legion for applicable dimensions.

**Vertical dimensions of 11" deep pan may be reduced by 2" to match 9" deep pan.

SKITTLE® GAS SPECIFICATIONS

Model*	Gas Rating - Btu Input		Gas Pressure & Piping Specifications	
	Natural	Propane	Natural	Propane
SKG5-()	34,000	35,000	Piping - 3/4" IPS	
SKG10-()	100,000	111,000	Inlet Pressure Range, 5.0-7.0 inches w.c.	Inlet Pressure Range, 12.0-14.0 inches w.c.
SKG15-()	132,000	149,000	Outlet Pressure Range, 3.5 inches w.c.	Outlet Pressure Range, 10.0 inches w.c.

U.S. PATENT NOS. 5,553,531, 5,964,145 & DES. 371,715

Revision 512



LEGION Legion Industries, Inc. P.O. Office Box 728 Waynesboro, GA 30830 (800) 887-1988
(706) 554-4411 Fax: (706) 554-2035 www.legionindustries.com sales@legionindustries.com