

# JET-TECH

## MODEL 737E


HIGH-TEMP UNDERCOUNTER  
ADVANCED ELECTRONIC DISHWASHER



- HIGH CAPACITY UP TO 30 RACKS PER HOUR.
- LOW CONSUMPTION ONLY 0.74 GALLONS OF WATER PER RACK.
- ENERGY STAR QUALIFIED.
- ROBUST STRUCTURE WITH DOUBLE STAINLESS STEEL INSULATED BODY FOR LOW NOISE AND LOW HEAT DISPERSION.
- INNOVATIVE WATER PROOF CONTROL PANEL WITH VISIBLE LED BUTTONS AND DIGITAL DISPLAY.
- SMART SELF DIAGNOSTIC FOR EASY SERVICE.
- SOFT START SYSTEM TO ALL CYCLE TO PREVENT BROKEN GLASSES.
- ATTIVABLE THERMOSTOP SYSTEM TO GUARANTEE FINAL RINSE PHASE AT 185°F. (85°C.)
- SANITARY LABYRINTH DOOR ELIMINATES NEED FOR GASKET.
- BUILT-IN BOOSTER FOR SUPERIOR SANITATION.
- BUILT-IN RINSE-ADDITIVE PUMP FOR SPARKLING RESULTS.
- BUILT-IN AUTOMATIC DETERGENT PUMP FOR CONSISTENT RESULTS.
- BUILT-IN AUTOMATIC DRAIN PUMP FOR EASE OF INSTALLATION.

# MODEL 737E

## HIGH-TEMP UNDERCOUNTER ADVANCED ELECTRONIC DISHWASHER




### CONSTRUCTION FEATURES

- BODY, EXTERNAL HOUSING, WASH TANK, AND ALL CHASSIS COMPONENTS IN BRUSHED STAINLESS STEEL AISI 304 18/8.
- NOISE 58 DBA DUE TO UTILIZATION OF DOUBLE-WALL INSULATED PANELS.
- UPPER AND LOWER WASH AND RINSE JETS ON REVOLVING ARMS CONSTRUCTED OF STAINLESS STEEL; EASY TO REMOVE AND CLEAN WITHOUT THE NEED FOR TOOLS.
- INTEGRATED AISI 304 18/10 STAINLESS STEEL BOOSTER WITH INSULATED LINING.
- SAFETY MICRO-SWITCH ON THE DOOR TO INTERRUPT WASH PUMP ACTION.
- POSSIBILITY OF BUILT-IN OR FREE-STANDING INSTALLATION.
- STANDARD INSULATED TOP AND SIDE PANELS.
- DEEP DRAWN INNER CHAMBER CONSTRUCTED WITHOUT WELDS OR CORNERS AND RECESSED WASH TANK MAKE THE 737E IDEALLY SUITED FOR MARINE USAGE.
- WASH PUMP PROTECTED WITH DOUBLE FILTERS, PLUS ADDITIONAL FILTER FOR OVERFLOW TUBE.
- DOOR-OPENING WITH OVERALL LEVEL REGULATION OF TANK.
- SLIDE OUT INTEGRATED FRONT CONTROL PANEL PROVIDES EASY ACCESS FOR SERVICE.
- WATERPROOF DIGITAL DISPLAY FOR WASH AND RINSE TEMPERATURES AND VISIBLE LED BUTTONS.
- SOFT START CYCLE TO WASH ALL KIND OF DISHES EVEN MOST DELICATE.
- ATTIVABLE THERMOSTOP SYSTEM THAT GUARANTEES FINAL RINSE TEMPERATURE AT 185°F (85°C.)
- SMART SELF DIAGNOSTIC FOR EASY ASSISTANCE AND SERVICE.

### TECHNICAL FEATURES

- RACK CAPACITY:** 19.75" x 19.75" (500 x 500 MM)
- CYCLE:** 2 - 3 - 4 MIN
- WASH TANK CAPACITY:** 3.4 U.S. GALLONS (13 LITERS)
- WASH TANK ELEMENT:** 2800 WATTS
- WASH TEMPERATURE:** 150°F. (65°C.)
- BOOSTER CAPACITY:** 1.72 U.S. GALLONS (6.5 LITERS)
- BOOSTER ELEMENT:** 4000 WATTS
- BOOSTER (WATER) TEMPERATURE:** 185°F. - 194°F. (85°C. - 90°C.)
- POWER SUPPLY:** 208-240/60/1 22.3 AMPS
- MOTOR PUMP:** 0.75 H.P. WITH CLIPSON AT 248°F. (120°C.)
- MAX POWER RATING:** 4550 WATTS
- WATER CONSUMPTION/HR:** 26.9 U.S. GALLONS / 102.0 LITERS MAXIMUM
- WATER SUPPLY:** 1/2" HOT WATER SUPPLY 140°F/60°C
- FLOW PRESSURE:** 25 PSI (DYNAMIC) (PRV MAY BE REQUIRED)
- WATER INLET CONNECTION:** 3/4" MALE HOSE CONNECT. (HOSE INCLUDED)
- SHIPPING WEIGHT:** 165 LBS. (75 KG.)

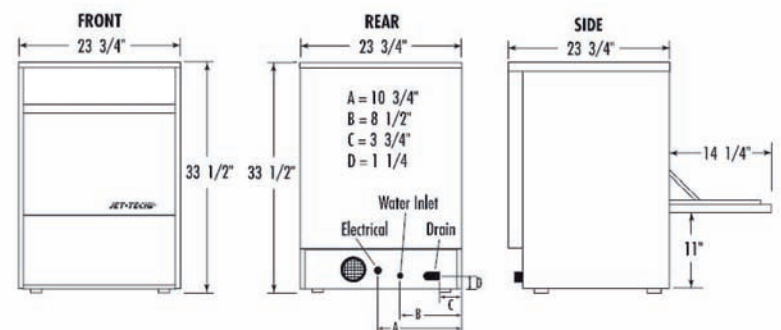

**MVP GROUP CORPORATION**

HEAD OFFICE: 5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9

TEL: (514) 737-9701 TOLL FREE: (888) 275-4538

FAX: (514) 342-3854 TOLL FREE FAX: (877) 453-8832

www.mvpgroupcorp.com email: sales@mvpgroupcorp.com