




Sushi

Counter top stainless steel
refrigerated display case

KSDC SERIES

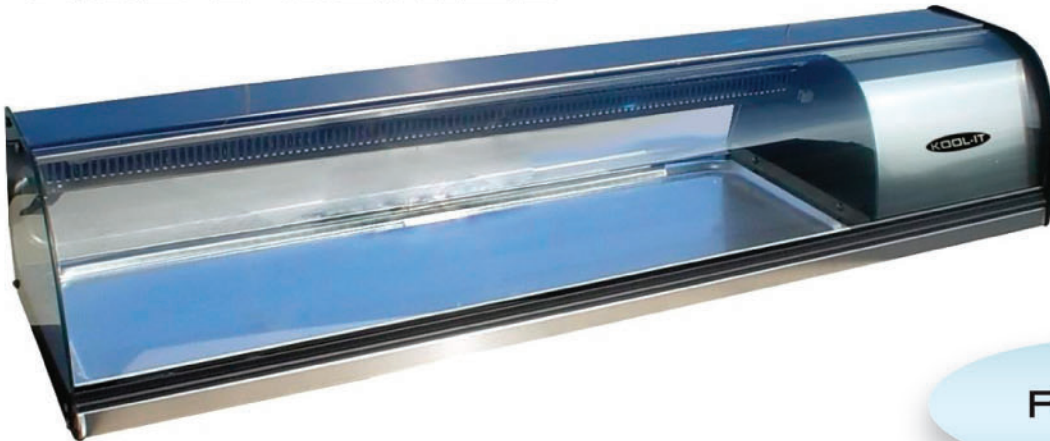

Features

- Designed to display sushi, meats, salads, desserts and many other items for quick point of purchase sales
- Curved front tempered glass for added visibility, safety and increased durability
 - Hinged front glass tilts forward to simplify cleaning
- Interior LED lighting (with protective cover) enhances overall product appearance
 - Removable sliding rear doors allow for easy access and simplify cleaning
- Upper double evaporator fin-type coil assures proper temperature throughout the cabinet
 - Electronic thermostat maintains temperatures between 33°F/1°C and 40°F/7°C, digitally displays temperature at all times
- Upper stainless steel baffle plate creates a drip-free food safe environment
 - Available with either a left side or right side compressor
 - Sealed compressor with a double-vented high quality condenser
 - 304 finish stainless steel deep drawn inner pan
 - Automatic defrosting
 - Stainless steel body
- Condensate from upper coil drains directly into a shelf contained evaporation channel, eliminating any drain connection requirement
 - Environmentally friendly R134-A type Freon
- These units are designed for maximum performance in an air-conditioned area of 77°F ambient temperature and 55% relative humidity



KSDC SERIES

Model	Width		Depth		Height		NET	Max	SHIPPING SPECS			
	Ext.	Int.	Ext.	Int.	Ext.	Int.	Weight	Capacity	Weight	Depth	Height	Weight
KSDC - 5	65.5"	41.3"	15.1"	12.1"	12.0"	6.2"	101 lbs	2.88 cu.ft	65.5"	23.2"	22.5"	145 lbs
KSDC - 6	70.4"	55.0"	15.1"	12.1"	12.0"	6.2"	114 lbs	3.83 cu.ft	79.2"	23.2"	22.5"	170 lbs
KSDC - 7	84.3"	70.0"	15.1"	12.1"	12.0"	6.2"	123 lbs	4.80 cu.ft	91.3"	23.2"	22.5"	190 lbs

Electrical :	115/60/1	Saturation temperature :	33°F/1°C
Voltage variation :	+ / - 10%	Ambient temp :	77°F/25°C, no load
Rated amperage :	4.5 A	Refrigerant type :	R-134A
Maximum ambient temperature :	77°F/25°C	Maximum load height :	5.4"
Compressor :	0.25 HP		

These units are designed for maximum performance in an air-conditioned area of 77°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.

Important : this unit doesn't have an automatic defrost system and must be turned off at night to allow the evaporator to defrost

Warranty : 12 months parts & labor, 24 months on the condenser & compressor



KOOL-IT is a registered trade mark of MVP Group.
Specifications subject to change without notice.



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com www.mvpgroupcorp.com