

Double Door Series

Refrigerator & Freezer Top Mount Compressor

KTSR-2 / KTSF-2

front	0	01.00	
		\rightarrow	

Project name :		
Location :		
Item:	Qty:	
Model :		

Durable Design

Stainless steel interior & exterior
 6 height adjustable, heavy-duty,
 PE coated wire shelves
 Incandescent interior lighting
 Digital temperature display
 Door locks with keys
 Simple plug-in installation

Energy Efficient

Self-closing door with stay open feature
 Seals tight with magnetic vinyl gasket
 Open door alert beeps when door is open for 5 minutes
 Foamed-in place high-density polyurethane insulated body, CFC-Free
 Large evaporator & condenser for quick cooling and greater efficiency

Superior Quality

- Designed for mobility, reliability & efficiency in commercial kitchens
- Certified with ETL & Energy Star guaranteeing quality standards and energy efficiency - 4" swivel castors with 2 front brakes - Easy grip handle - Entirely self-contained system - Automatic defrost system - Automatic defrost system - Digitally controlled temperature system - Accomodates full-size bun sheet pans - Easily adjustable shelf height - Internal storage capacity is 44.7 cu.ft. - NEMA 5-15 plug


- Compressor : Refrigerator - 1/3 HP / Freezer - 3/4 HP - Holding temperature : Refrigerator 33°F to 39°F / Freezer 5°F to -9.4°F



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com www.mvpgroupcorp.com



KTSR-2 / KTSF-2

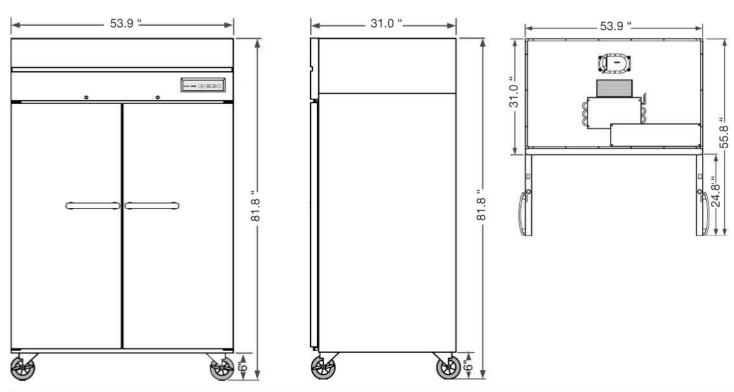

Model Number	Description	Interior/ Exterior Material	Number of Doors	Number of Shelves	Capacity (cubic feet)	Exterior Dimensions (WxDxH in.)	Compressor Size	Voltage/ Frequency	Amps	Working Temp.	Refrigerant	Ship Weight (lbs.)
KTSR-2	Top Mount Double Door Refrigerator		2	6	44.7	53.9 x 31.0 x 81.8	1/3	115V 60 Hz	5.1	33°F to 39°F	R134a	448
KTSF-2	Top Mount Double Door Freezer	Stainless Steel	2	6	44.7	53.9 x 31.0 x 81.8	3/4	115V 60 Hz	10.5	5°F to -9.4°F	R404a	518

These units are designed for maximum performance in an air-conditioned area of 75° F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.

Warranty: 18 months parts & labor. Additional 42 months on compressor (part only)







KOOL-IT is a registered trade mark of MVP Group. Specifications subject to change without notice.



Tel.: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com www.mvpgroupcorp.com