




MODELS

KBD-FG-(40, 50, 60)-S
KBD-FG-(40, 50, 60)-R
KBD-FG-(40, 50, 60)-D

FLAT GLASS BAKERY
DELI CASE

Case holds 36°F to 40°F • Forced air refrigeration • Tempered tilt-out flat front glass • Tempered side glass and rear sliding doors
• LED lighting in canopy and under all shelves
Cases can be multiplexed



SELF CONTAINED	Model	O.A. Length Inches	Volume FT ³	Electrical - 115 volts					NEMA 115V Plug	Weight LBS.		Crate Size			
				Compressor			Lights Fans HTRS	Evap Pan		Total Amps	No Crate	With Crate			
			H.P.	F.L.A.	L.R.A.	"L"							"W"	"H"	
	KBD-FG-40-S	40-3/8	15.55	3/8	8.4	43	1.4	3.3	13.2	5-15P	397	543	43-3/8	34-1/2	62-1/4
	KBD-FG-50-S	52-1/8	20.49	1/2	9.6	49	1.6	3.3	14.6	5-20P	461	638	55-1/8	34-1/2	62-1/4
KBD-FG-60-S	60	23.78	1/2	9.6	49	1.8	3.3	14.8	5-20P	505	703	63	34-1/2	62-1/4	

REMOTE	Model	O.A. Length Inches	115 Volts Total Amps	B.T.U.	Weight LBS.	
					No Crate	With Crate
	KBD-FG-40-R	40-3/8	0.95	2621	337	484
	KBD-FG-50-R	52-1/8	1.19	3110	403	580
	KBD-FG-60-R	60	1.36	3268	447	645

NON-REFRIGERATED	Model	O.A. Length Inches	115 Volts Total Amps	NEMA 115V Plug	Weight LBS.	
					No Crate	With Crate
	KBD-FG-40-D	40-3/8	0.29	5-15P	338	484
	KBD-CG-50-D	52-1/8	0.33	5-15P	381	549
	KBD-CG-60-D	60	0.41	5-15P	423	611

STANDARD FEATURES


- Insulation-CFC free injected foam
- Interior-PVC coated steel gray
- Exterior-PVC coated steel silver
- Silver colored PVC coated steel
- front panel with black steel kick plate
- Foamed polystyrene black end panels
- Removable rear tempered glass sliding doors
- Height adjustable, tempered glass shelves can be tilted
- Temperature and defrost regulated by a digital controller
- Easy access to the evaporator for maintenance
- Removable condensate evaporating pan for easy cleaning on self-contained units
- Digital temperature display
- Anti-condensate system for front glass
- Cord and plug on self-contained and dry units
- Levelling feet

OPTIONAL FEATURES

- Stainless steel exterior
- Stainless steel interior
- Other colors available
- Additional shelves
- Joining kit
- Partition or Product dividers
- Scale stand with 120 V receptacle
- Condensate evaporative pan for remote cases
- Casters-add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"


WARRANTY


One year parts and labor with an additional four years on the compressor (part only)

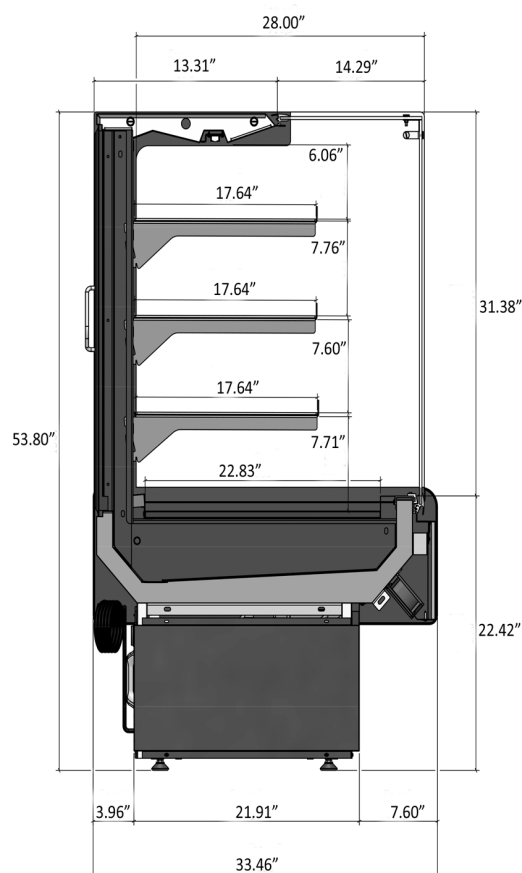

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

 Tel: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

 Tel: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com

2017-04

MVP
GROUP

Hydra-Kool is a registered trademark of MVP Group Corp
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE