



WE RAISE THE BAR. WE SET THE STANDARD.

Project \_\_\_\_\_

Item Number \_\_\_\_\_

Quantity \_\_\_\_\_

8713M



## 8713M Gear Driven Premium Slicer

### Model:

➤ 8713M: 1/2hp Manual Slicer



CERTIFIED BY NSF INTERNATIONAL TO MEET  
AND EXCEED THE NSF/ANSI 2012 STANDARDS

13" Precision slicing German hollow ground blade  
Unique smooth curve transitions to redirect  
liquids away from controls and operator  
Easily detachable carriage for easy cleaning

### Features:

- Medium to heavy duty, high volume slicer
- Maximum duty 8 hours a day
- Capable of slicing unlimited amounts of cheese
- Unique drip tray fence redirects liquids away from controls and operator towards distinctive concave base casting for easy cleaning
- Ergonomic comfort design operation
- Powerful 1/2 hp motor standard
- Adjustable slice thickness from 0 to 7/8"
- Easily removable sharpener for cleaning
- Quick and simple disassembly of carriage and feed grip for easy and thorough cleaning
- Sanitary polished and anodized aluminum construction
- Permanently mounted protective edge guard for operator safety
- Heavy duty 3-1/2 lb gravity fed grip
- 3 inch legs make cleaning under the slicer simpler for the user

### Optional Accessories:

- Stainless steel blade
- Serrated steel blade
- Heavy duty clear plastic cover
- Stainless steel vegetable chute
- Sturdy stainless steel stand
- Security reinforced prison package

### Warranty:

- One year, on-site parts and labor

Univex Corporation

Premium Series Slicer



**Univex Corporation**  
**www.Univexcorp.com**

3 Old Rockingham Rd  
Salem, NH 03079  
United States of America


TEL: (800)258-6358  
INTL TEL: (603)893-6191  
FAX: (800)356-5614  
INTL FAX: (603)893-1249



WE RAISE THE BAR. WE SET THE STANDARD.

## Premium Series Slicer

## 8713M

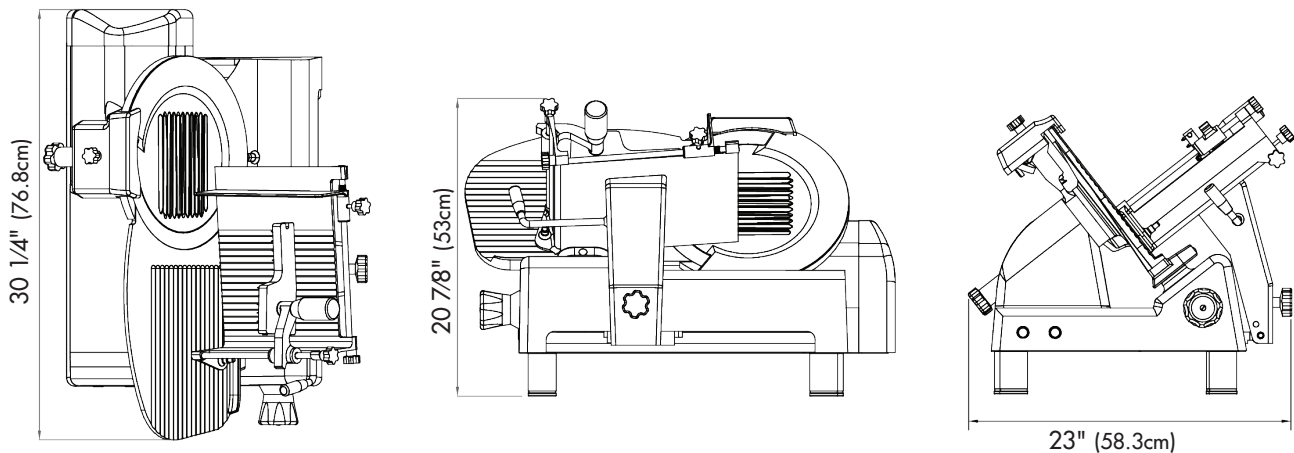

Controls: Manual slice thickness knob, push button on/off, attached blade sharpener

Drive Assembly: Gear driven

Blade diameter: 13" (33cm) razor sharp blade

Blade RPM: 300 RPM

Maximum slice thickness: .875" (2.2cm)

Maximum product size: Rectangular: 10" x 6.5" (25.4cm x 16.5cm)

Square: 6.5" x 6.5" (16.5cm x 16.5cm)

Round: 9" (22.9cm)

Construction: Anodized, cast aluminum body for durability and stunning looks

Nema #: 5-15-P

### Electrical Information (60Hz)

|                  | Voltage | Phase | Amps | RPM  | hp(kW)    |
|------------------|---------|-------|------|------|-----------|
| Standard Voltage | 115     | 1     | 5.4  | 1680 | 1/2 (.37) |
| Optional Voltage | 208-240 | 1     | 2.7  | 1680 | 1/2 (.37) |

### Carriage Stroke

13" (33cm)

### Shipping Information

| Net Weight       | Shipping Weight | Overall Shipping Dimensions                      |
|------------------|-----------------|--------------------------------------------------|
| 122lbs. (55.3Kg) | 130lbs. (59Kg)  | 25" (63.5cm) H x 22" (55.9cm) W x 33" (83.8cm) D |



**Univex Corporation**  
**www.Univexcorp.com**

3 Old Rockingham Rd  
Salem, NH 03079  
United States of America

TEL: (800)258-6358  
INTL TEL: (603)893-6191  
FAX: (800)356-5614  
INTL FAX: (603)893-1249