



D500GT & D1000AP – CLEANING INSTRUCTIONS

CLEAN

1. Turn off the unit button on the front control panel.
2. Wipe exterior surfaces with a damp cloth, removing spills and debris.
3. Slide the brewcone out and clean it. Thoroughly soap the sprayhead area with a mild detergent solution.
4. Rinse and dry the brewcone and sprayhead area.
5. Clean out airpots with a sponge brush and a mild detergent solution. To remove mineral deposits, fill liner with vinegar and allow to soak.
6. Wash the brewcone and wire brew basket, if applicable. Use a soft bristled brush for hard to clean areas.

RINSE

1. Thoroughly rinse all cleaned parts.
2. Rinse out airpot until water runs clear.
3. With clear water, use a clean cloth to wash the exterior surfaces, removing residue left behind by the cleaning.

DRY

1. Completely air dry all parts before installation on the unit.
2. With a clean soft cloth, wipe dry all exterior surfaces of the unit to keep water from spotting the cabinet.

NOTE - Polish stainless steel surfaces with stainless steel polish after drying. This will prevent surface scratches and result in a cleaner appearance.

Cleaning the Curtis D500GT & D1000AP airpot brewing system....

A daily routine of cleaning Airpot coffee brewers will maintain the appearance of the unit and ensure great tasting coffee.


CAUTION – Do not use cleansers, bleach liquids, powders or any other substance containing chlorine. These products promote corrosion and will pit the stainless steel. USE OF THESE PRODUCTS WILL VOID THE WARRANTY.

WILBUR CURTIS COMPANY, INC.

6913 Acco Street, Montebello, CA 90640-5403

Telephone: 800-421-6150 323-837-2300

Fax: 323-837-2406

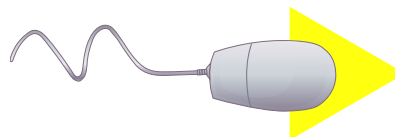

find the latest on the web at
www.wilburcurtis.com