BUNN® INTERNATIONAL

ITEM#

PROJECT

DATE

G2 trifecta® Grinder



G2 trifecta® Grinder
Dimensions: 26.5"H x 7.3"W x 15.9"D
(67.3cm H x 18.54cm W x 40.4cm D)
See page 2 for installation space requirements.

Features


G2 trifecta® Grinder

- Chute assembly accommodates trifecta brewer brew cup.
- Expanded range of precise grinds can be selected.
- Heavy-duty precision burrs for quality, finer grinds.
- Convenient cleaning lever ensures complete clean out of coffee from grind chamber.
- May also be used as a bulk grinder in behind-the-counter applications.
- Hopper holds 2 lbs. (.91 kg) of fresh coffee beans.
- Four year warranty on grinding burrs.
- Tested to CE Standards.
- 28 grind settings.

For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Precision Burrs
All BUNN grinders use precision burrs to cut (not crush) the coffee beans and deliver consistent grind distribution. BUNN burrs are rated at a Rockwell hardness of 66C, resulting in an exceptionally long burr life.



Standard Burr Replacement Kit
Product No: 05861.1002


Turkish Burr Replacement Kit
Product No: 11285.1000


Hopper Magnet Kit
Product No: 20204.1702


Dimensions & Specifications

Model	Product #	Volts	Amps	Capacity	Shipping Weight	Plug Attached	Agency
G2A TRIFECTA (50Hz)	41900.0032	220-230	4.5	09 kg.	26.8 kg	A	CE
G2A TRIFECTA (50 Hz)	41900.0037	220-230	4.5	09 kg.	26.8 kg	B	CE
G2A TRIFECTA (50/60 Hz)	41900.0023	220-230	4.5	09 kg.	26.8 kg	E	K
G2A TRIFECTA (60 Hz)	41900.0035	230	4.5	09 kg. (2 lbs.)	26.8 kg (59 lbs.)	D	N

Electrical: Model requres 2-wires plus ground service rated 220-240V, single phase, 50/60 Hz., circuit required, ¾ HP motor.

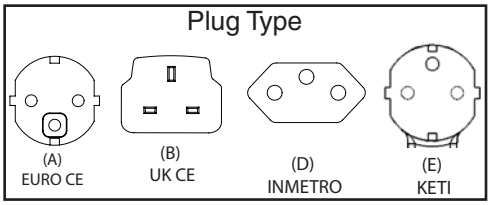

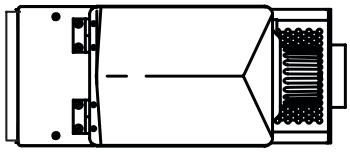

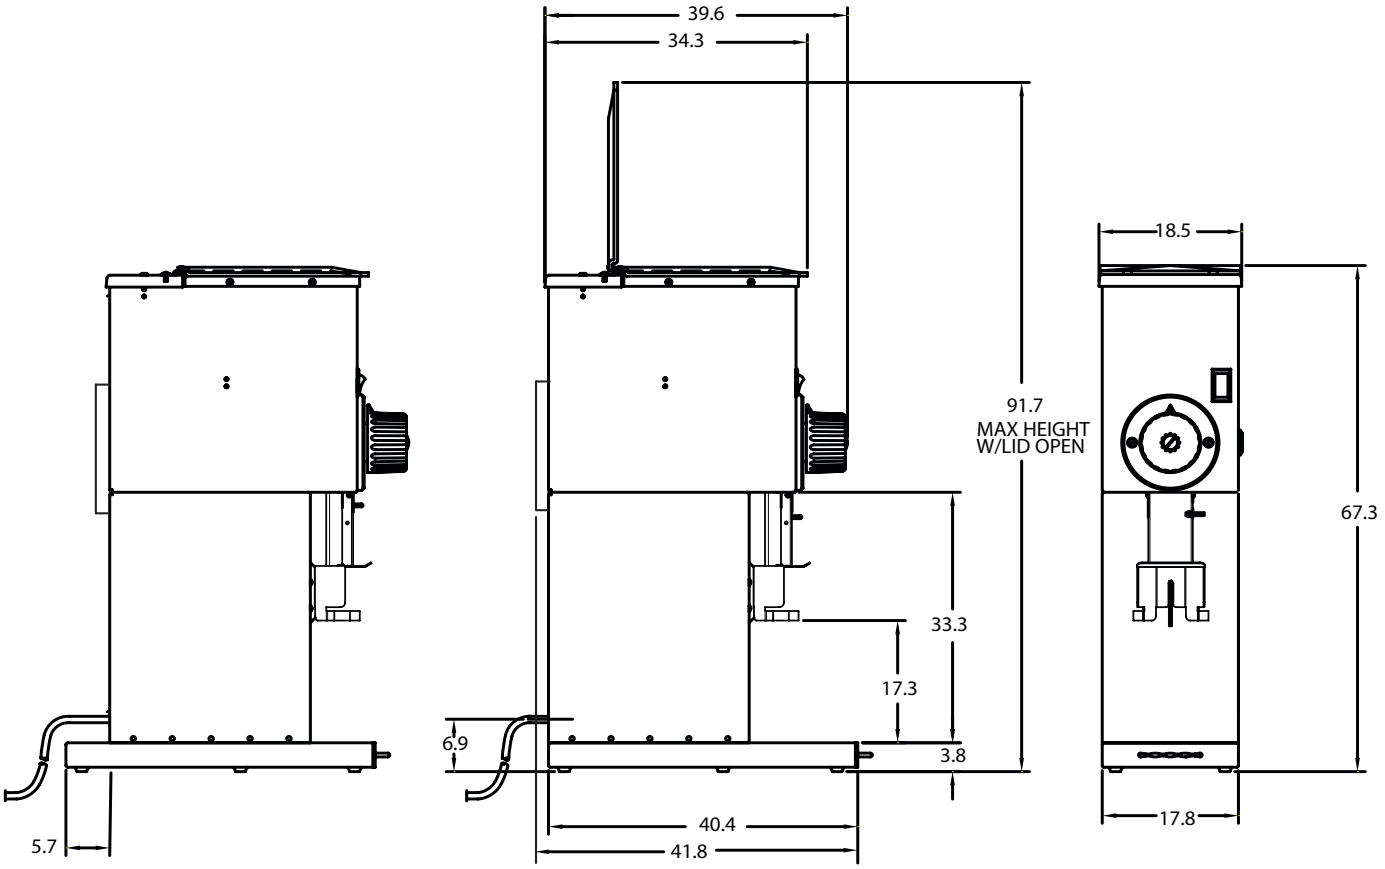

OPTIONAL: BASE CAN BE MOUNTED WITH OFFSET AS SHOWN FOR ADDITIONAL BAG CLEARANCE.

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

6/12 © Bunn-O-Matic Corporation