BUNN®

ITEM#

PROJECT

DATE

12 Cup Automatic Coffee Brewer with 6 Warmers



CWTF 0/6 Twin

(decanters sold separately)

Dimensions: 20.54" H x 30.75" W x 20.64" D

(52.17cm H x 78.11cm W x 50.43cm D)

Features

12 Cup Automatic Coffee Brewer

- Twin brew head systems.
- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Six individually controlled warming stations.
- All stainless steel construction.
- Includes hot water faucet.
- Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.

For current specification sheets and other information, go to *www.bunn.com*.

Related Products

Easy Clear® EQ-17-TL
Product No. : 30200.1000
Dimensions:
12 7/16" H x 2 1/2" W x 3" D
31.6 cm H x 6.35 cm W x 7.62 cm D

Easy Clear® ED-17-TL
Product No. : 30201.1001
Dimensions: 8 1/4" H x 2 5/16" Dia.
20.95 cm H x 5.87 cm Dia.



Paper Filter Pack
Product No. : 20115.0000
Packed per case: 1,000
Dimensions: 4 1/4" Base x 2 3/4" Sidewall
10.8 cm Base x 6.98 cm Sidewall



Easy Pour® black decanter
Product No. : 06100.0101
Quantity: 1 *(also packaged in quantities of 2, 3, 6, 12, & 24)*



Easy Pour® orange decanter (for decaf)
Product No. : 06101.0101
Quantity: 1 *(also packaged in quantities of 2, 3, 6, 12, & 24)*



For current specification sheets and other information, go to *www.bunn.com*.

Model	Agency Listing
CWTF 0/6 Twin	UL LISTED NSF

Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
CWTF 0/6 Twin	23400.0020	120/240	28.75	2 @ 3000	6850	15.0 gal./hr.	11.6	74 lbs.	No
CWTF 0/6 Twin*	23400.0026	120/240	28.75	2 @ 3000	6850	15.0 gal./hr.	11.6	74 lbs.	No

** Plastic funnel*


Machine has two 3000 watt tank heaters.

Brewing capacity: *based upon incoming water temp of 60ºF (140ºF rise) per 1/2 gallon brew time of 4 minutes.*

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 3-wires plus ground, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ⅜" male flare fitting.

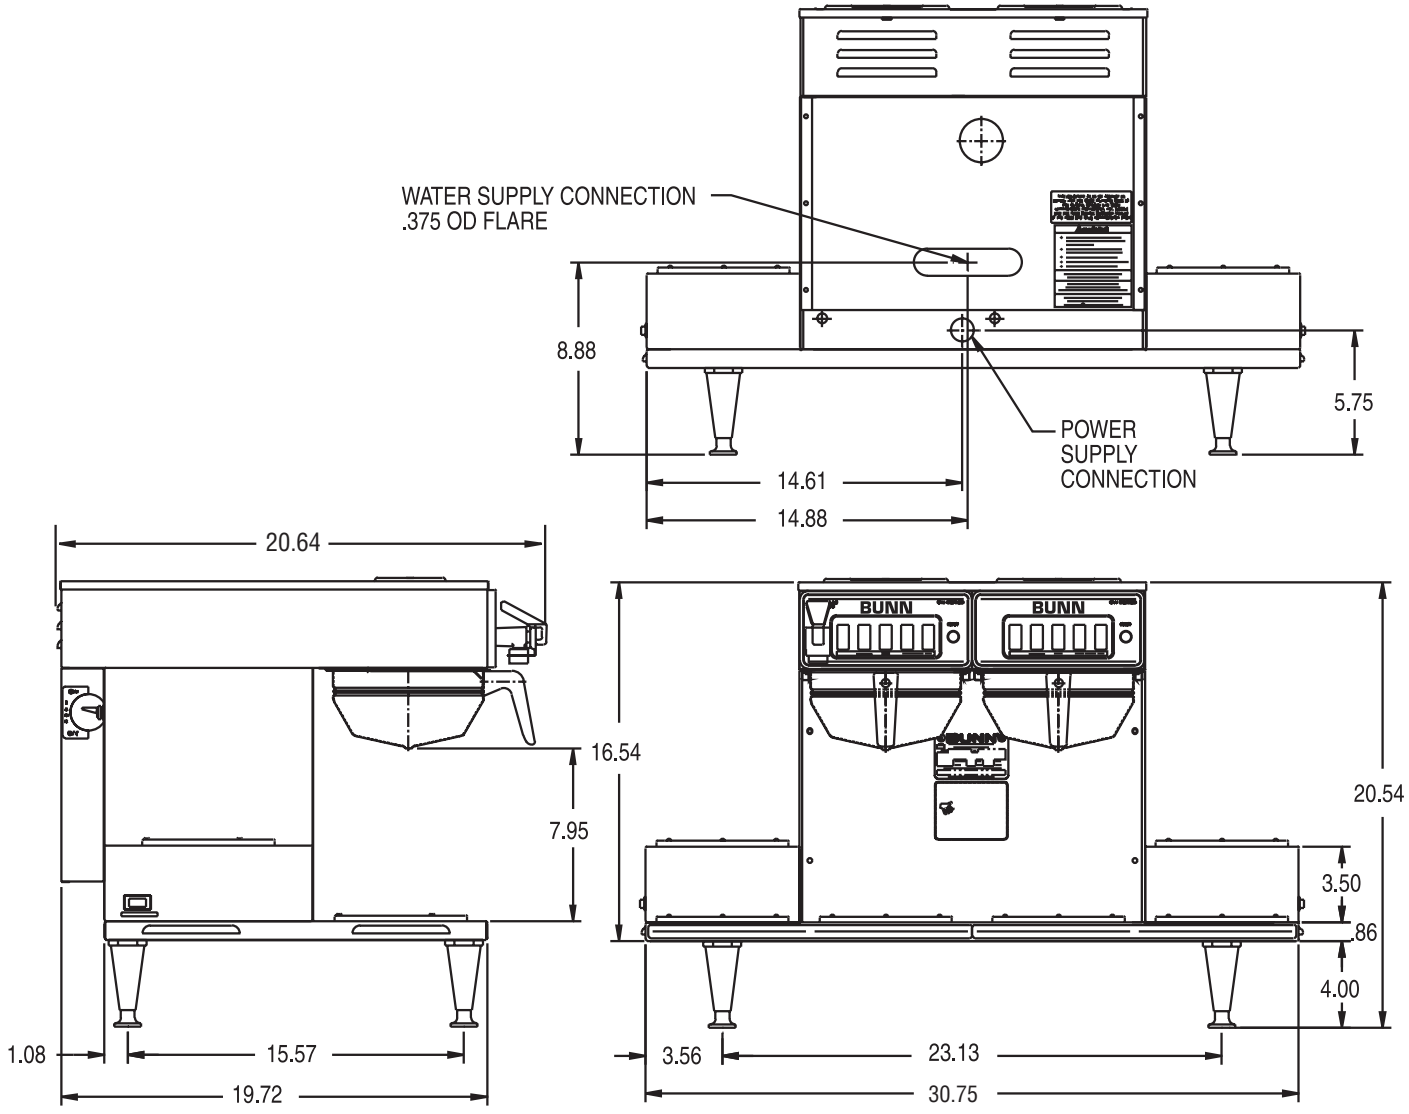

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

9/12 © Bunn-O-Matic Corporation