

**WARRANTY:**  
**ICE MAKERS - 3 YEARS PARTS AND LABOR**  
**EVAPORATOR - 5 YEARS PARTS AND LABOR**  
**COMPRESSOR - 5 YEARS PARTS**












# DELTA NG 120 R290 115 V / 60 Hz

## SELF-CONTAINED ICE CUBE MACHINE

### FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES THAT AVOID LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKLIN OR SIMILAR) WITHOUT COOLING
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM TO 155MM



	 24 H	 70°F/20°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 <b>lbs (Kg)</b>	 <b>in (mm)</b>	 <b>in (mm)</b>	
DELTA NG 120 A		<b>108 (49)</b>	<b>95 (43)</b>	<b>44 (20)</b>	Width <b>18.31"</b> (465) Depth <b>23.43"</b> (595) Height* <b>31.06"</b> (789)	Width <b>21.26"</b> (540) Depth <b>25.98"</b> (660) Height <b>36.22"</b> (920)	<b>DELTA 40gr</b> 1.57" (Ø) x 1.73" (H) 40 (Ø) x 44 mm (H) Average dimensions		
DELTA NG 120 W		- (-)	- (-)						

\* WITH LEGS 35.20"/37.17" (894/944)

### ACCESSORIES

#### INCLUDED



WATER OUTLET HOSE



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP

#### NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE FILTER #7500



10" FILTER ANTI-LIMESCALE + ANTI-CHLORINE PRO-101 K #33738



PARTICLE FILTER #7499




C4 WATER SOFTENER #30353



SCALE KLEEN #33492

# TECHNICAL SCHEME

DELTA NG 120

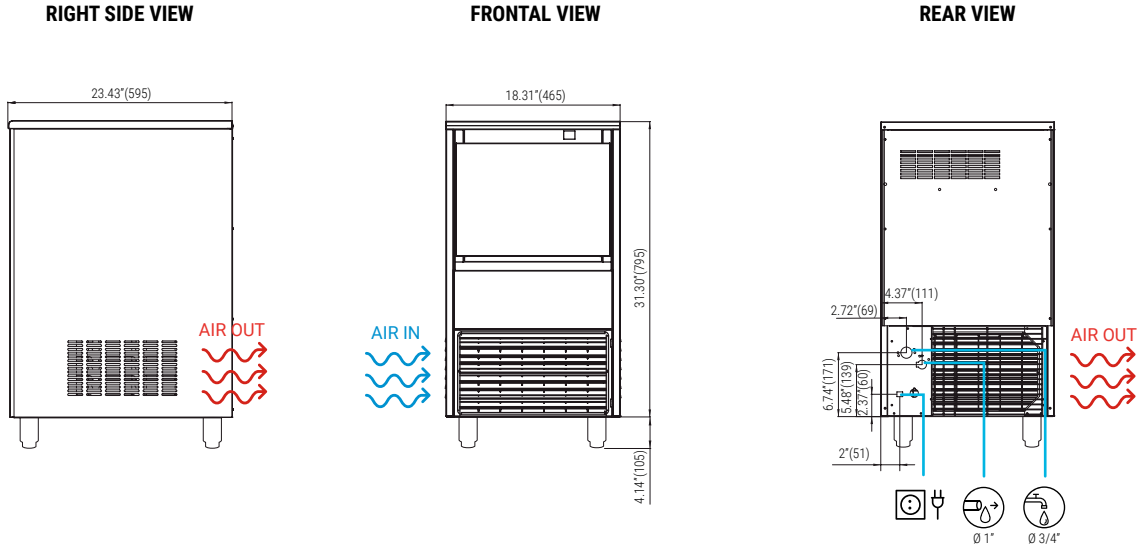

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V  
41°F/109°F  
41°F/95°F  
14.5 psi (1 bar) / 87 psi (6 bar)  
24 Ice cubes/cycle

R290

		DELTA NG 120 AIR COOLED					DELTA NG 120 WATER COOLED				
		50° 10°	60° 15°	70° 21°	86° 30°	50° 10°	60° 15°	70° 21°	86° 30°		
50° 10°	108	106	101	95	-	-	-	-			
68° 21°	108	104	99	93	-	-	-	-			
90° 32°	101	97	95	90	-	-	-	-			
109° 43°	93	86	82	75	-	-	-	-			

V | Hz | pH  
115 | 60 | 1N

MODELS	ASHRAE CONDITIONS (BTU/h) (W)	(W) 109°F	(AWG/mm²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
DELTA NG 120 A	4,163 1,220	382	16/1.5	3	10	8.6	44.3 6.6	3,333 889	99 123
DELTA NG 120 W	-	-	-	-	-	-	-	-	-



ITV Ice Makers, Inc.  
9550 Satellite Blvd, Suite 100  
Orlando, FL 32837  
Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
Toll Free: 1 888 488 1423  
sales@itvice.com | www.itvice.com

SERVICE  
service@itvice.com  
Skype: service@itvice.com  
PHONE: +1 888 488 1423  
FROM 8AM TO 5PM EST

**WARRANTY:**  
ICE MAKERS - 3 YEARS PARTS AND LABOR  
EVAPORATOR - 5 YEARS PARTS AND LABOR  
COMPRESSOR - 5 YEARS PARTS

