QUALITY LINE OF COOKING EQUIPMENT

HEAVY DUTY WOK RANGES

STANDARD FEATURES


- Stainless Steel front and sides.
- Heavy gauge steel with welded-in 2" high 13" wok opening.
- Heavy gauge steel chassis.
- 23 tip 125,000 BTU/hr. jet burner.
- Brass control valve with large width aluminum handle.
- Adjustable bullet feet for leveling.
- 13" or 16" diameter wok rings.
- Optional swivel casters available.
- One year limited warranty, parts and labor.

OPTIONAL FEATURES

- Tempura style with 3 ring burner (90,000 BTU.)
- 13" (330) or 16" (406) diameter wok rings, others available, call factory.
- Water wash style with various sized openings, call for details and pricing.
- Swivel casters.
- Non clogging duck-tip jet burner available.



ARWR-JI3




DESIGNED & BUILT IN US

American Range ARWR Series of Wok Ranges are design engineered to provide years of dependable service. Heavy gauge construction and Stainless Steel sides and front provide durability and easy cleaning. The top is heavy gauge steel with welded on stubs to firmly hold the wok. A large aluminum leverhandle for the gas valve facilitates "knee control" allowing hands-free cooking. The standard 23 tip jet burner gives 125,000 BTU/hr. heat capacity, with a Stainless Steel standing pilot for instant ignition.

Look to American Range for innovation, reliable performace, quality and attention to your equipment needs and prompt delivery, now and for all your future needs.



ARWR HEAVY DUTY WOK RANGES

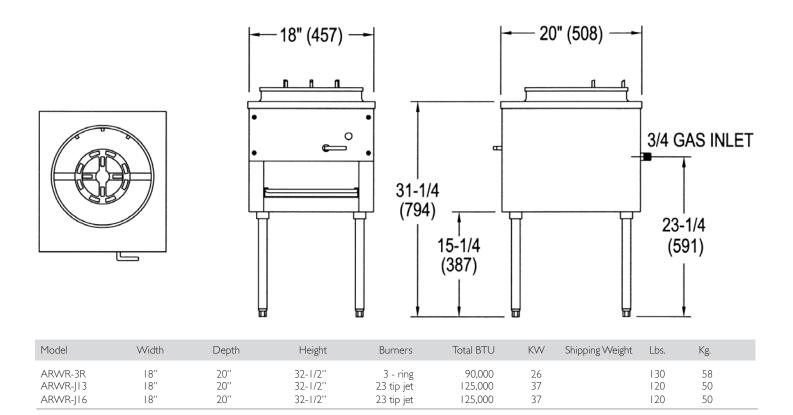

STANDARD FEATURES

- Stainless Steel front and sides.
- Heavy gauge steel with welded-in 2" high 13" wok opening.
- Heavy gauge steel chassis.
- 23 tip 125,000 BTU/hr. jet burner.
- Brass control valve with large width aluminum handle.
- Adjustable bullet feet for leveling.
- 13" or 16" diameter wok rings.
- Optional swivel casters available.
- One year limited warranty, parts and labor.

OPTIONAL FEATURES

- Tempura style with 3 ring burner (90,000 BTU.)
- 13" (330) or 16" (406) diameter wok rings, others available, call factory.
- Water wash style with various sized openings, call for details and pricing.
- Swivel casters.
- Non clogging duck-tip jet burner available.

GAS SUPPLY: 3/4" NPT Gas inlet. Manifold pressure is 5.0" W.C. for natural gas or 10.0" W.C. for propane gas. Specify type of gas and altitude if over 2000 feet.

Clearances: For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) on sides, and 4" (102) from rear. Radiant broilers for non-combustible locations only.

American Range is a quality manufacturer of commercial cooking equipment. Because of continuing product improvements these specifications are subject to change without prior notice.





A70178 09272013