BUNN®

ITEM#

PROJECT

DATE

BrewWISE® Single Soft Heat® DBC Brewer



Model Single SH DBC with 1.5 gallon SH Servers*
(servers sold separately)
Dimensions: 35.8" H x 9.3" W x 23.1" D
(90.9cm H x 23.6cm W x 53.8cm D)

Features

BrewWISE® Brewing System

- Brews 11.4 gallons (43.2 liters) of perfect coffee per hour.
- Brews ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 liter) batches.
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, Pulse-Brew, and pre-infusion timing.
- Operate any combination of BrewWISE®equipment error-free with wireless brewer-grinder interface via Smart Funnel.
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Consistently brew perfect coffee using Digital Brewer Control with pulse brew.
- Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer on your PC (Windows® compatible).
- International electrical configurations available.

For current specification sheets and other information, go to *www.bunn.com*.

**International models may vary in appearance.*

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004

Easy Clear® EQHP-10L
Product No. : 3900.1001



Single/Dual Filter Pack
Product No. : 20138.0000
Packed per case: 500
Dimensions:
5¼" Base x 4¼" Sidewall
13.3 cm Base x 10.8 cm Sidewall



BrewWISE® Recipe Writer (BRW)
Product No.: 34444.0000 (120V)
Dimensions:
2 3/16" H x 6 3/8" W x 9½" D
5.56 cm H x 16.2 cm W x 24.1 cm D



Recipe Card
Product No.: 34447.0000
- Program a recipe to be used on brewer or grinder.



Ad Card
Product No.: 34448.0000
- Program a message to appear on the brewer's display.



G9-2T DBC
Product No.: 33700.6000
- Grinder holds 6 pounds each of regular and decaf or specialty beans.



Model	Agency Listing
Single SH DBC	cULus
G9-2T DBC SH Server and Stands	NSF

Dimensions & Specifications

CANADA


Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
Single SH DBC	33600.6000	120/240	17.5	4000	4100	11.4 gal /43.2 liter	7.9 /.22	59 /26.8	No
Single SH DBC†	33600.6001	120/240	17.5	4000	4100	11.4 gal /43.2 liter	7.9 /.22	59 /26.8	No
G9-2T DBC	33700.6000	120	9.4	n/a	n/a	n/a	5.1 /.14	66 /29.9	Yes
SH Server *(1.5 gal.)*	27850.6001	n/a	n/a	n/a	n/a	1.5 gal /5.68 liter	2.9 / .08	18 /8.2	No
1SH Stand	27825.6000	120	.75	n/a	90	Holds 1 SH Server	1.5 /.04	13 /5.9	Yes
2SH Stand	27875.6000	120	1.5	n/a	180	Holds 2 SH Servers	2.5 /.07	22 /10.0	Yes

†Model has funnel lock system. Note: Soft Heat® Brewers and Servers are boxed and shipped separately.
Brewing capacity: based upon incoming water temp of 60ºF (140ºF rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.
Grinder is 2-wires plus ground service rated 120V, 60Hz, circuit required, ¾ HP motor.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ¼" (6.4 mm) male fitting.

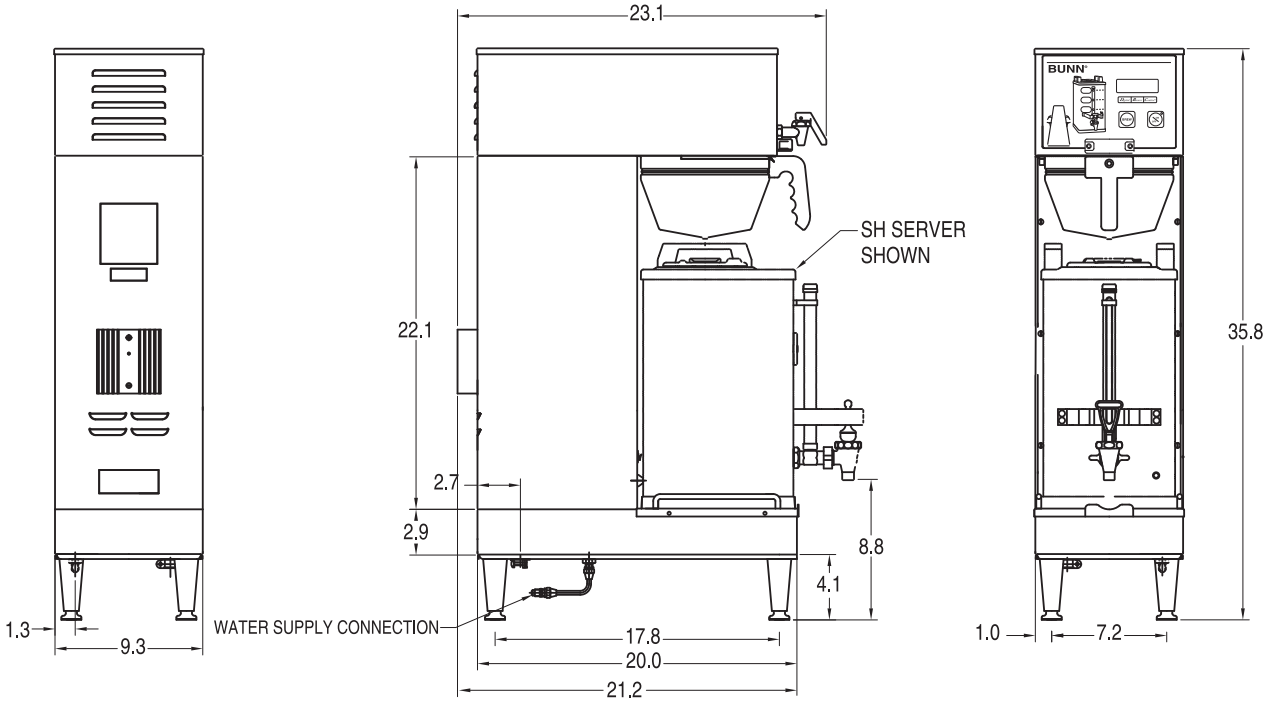

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. *Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.*